



.....

.....

.....

.....

目录



Supply Voltage VDD 6.0 V


Ope




Recommended usage conditions

Supply Voltage					
input frequency					
Operating temperature					



Application circuit diagram

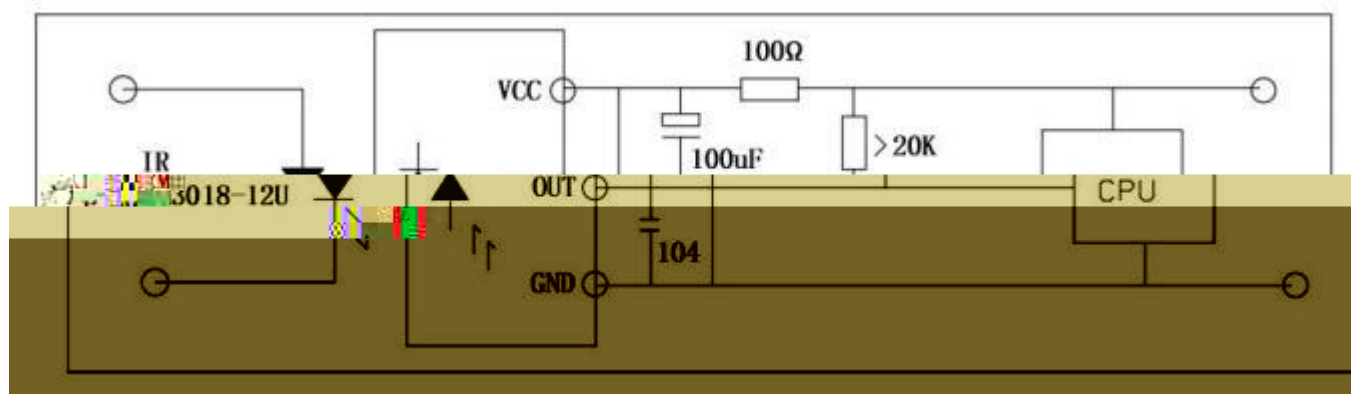

schematic diagram

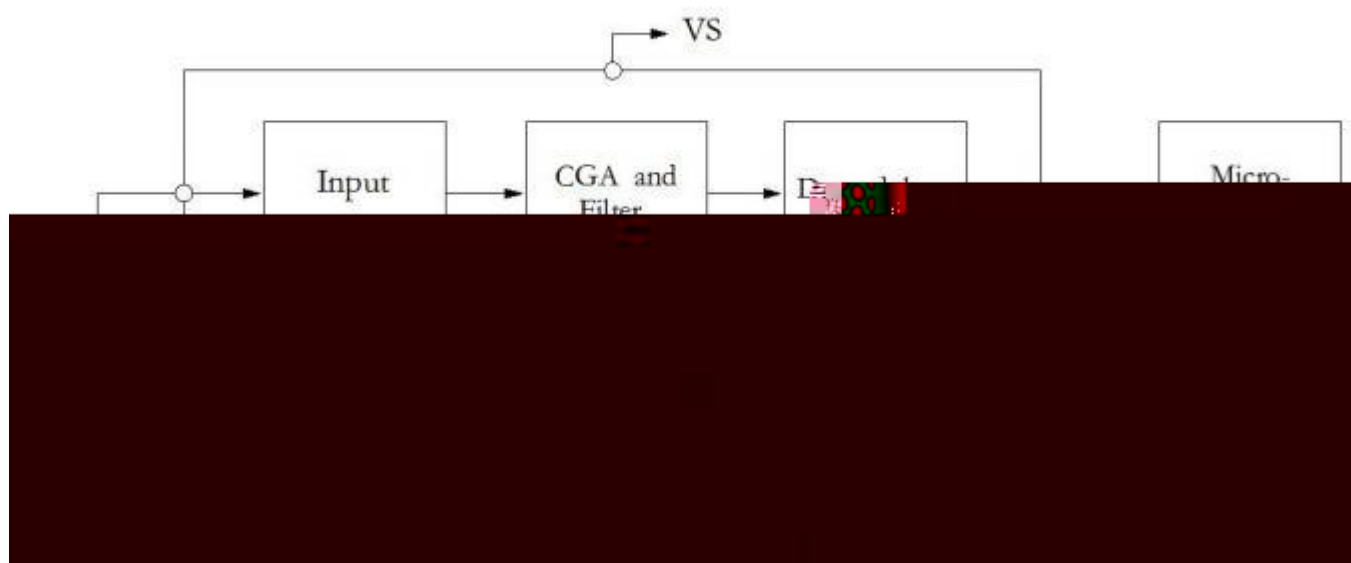

Receiving angle testing method

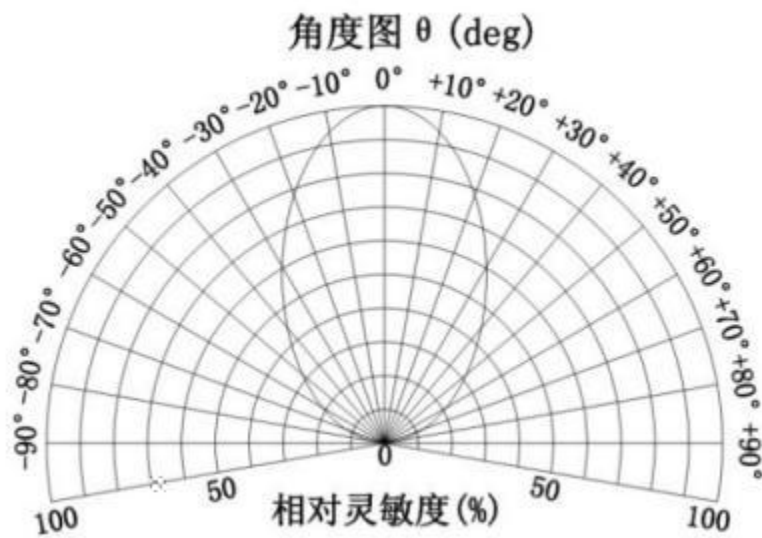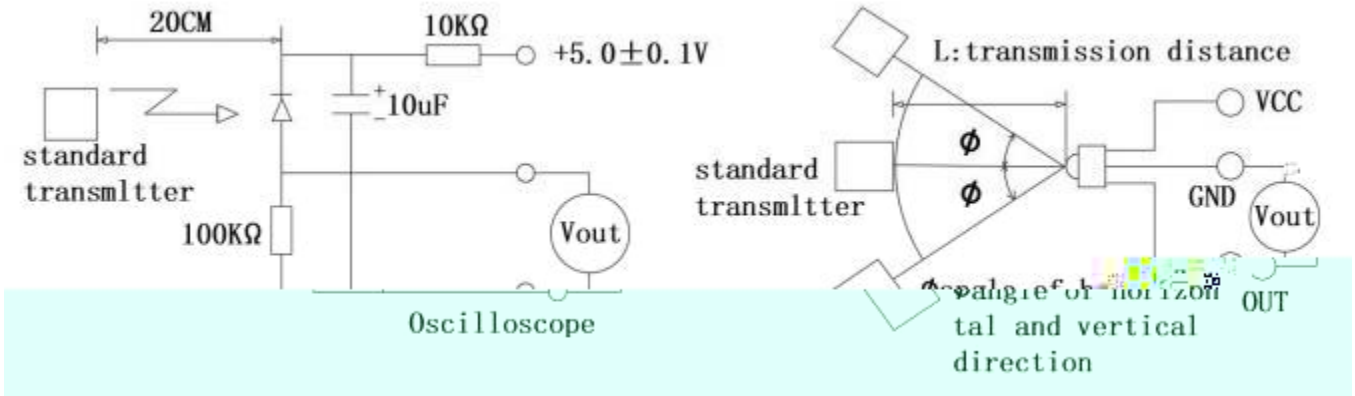

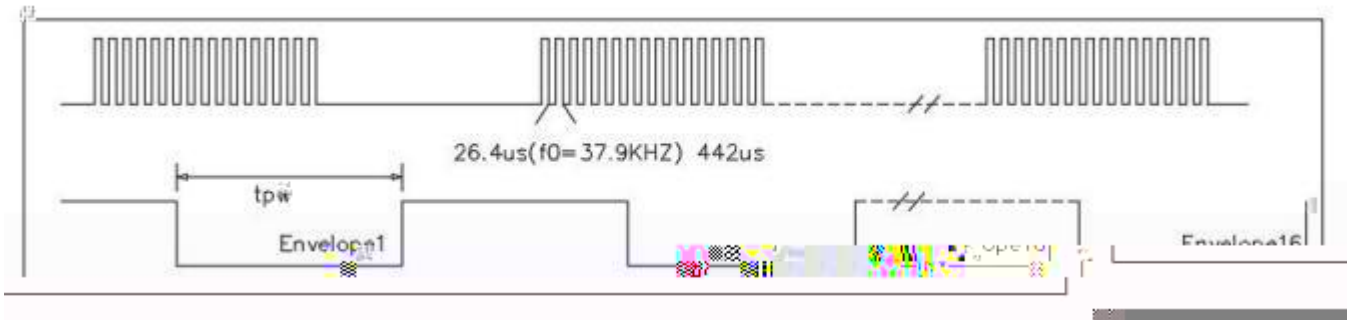


Figure 4. Typical Bandpass Curve


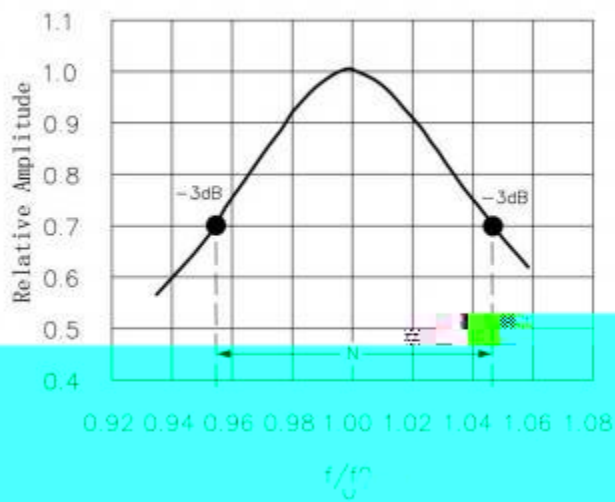


Figure 4. Supply Current VS supply voltage

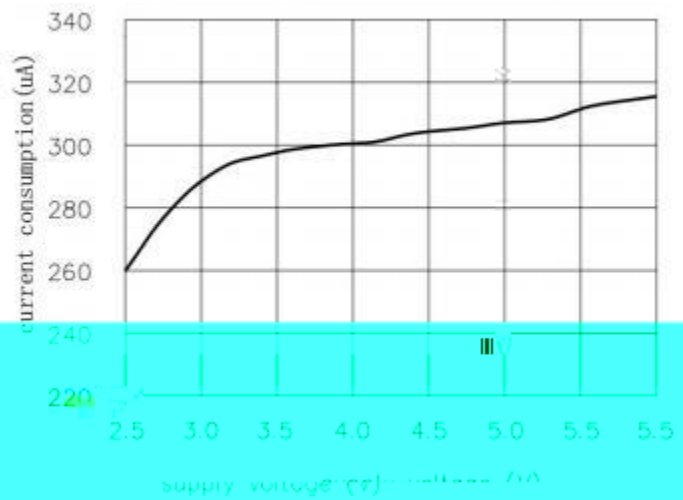


可靠性

信譽

Items And Conditions

--	--	--	--

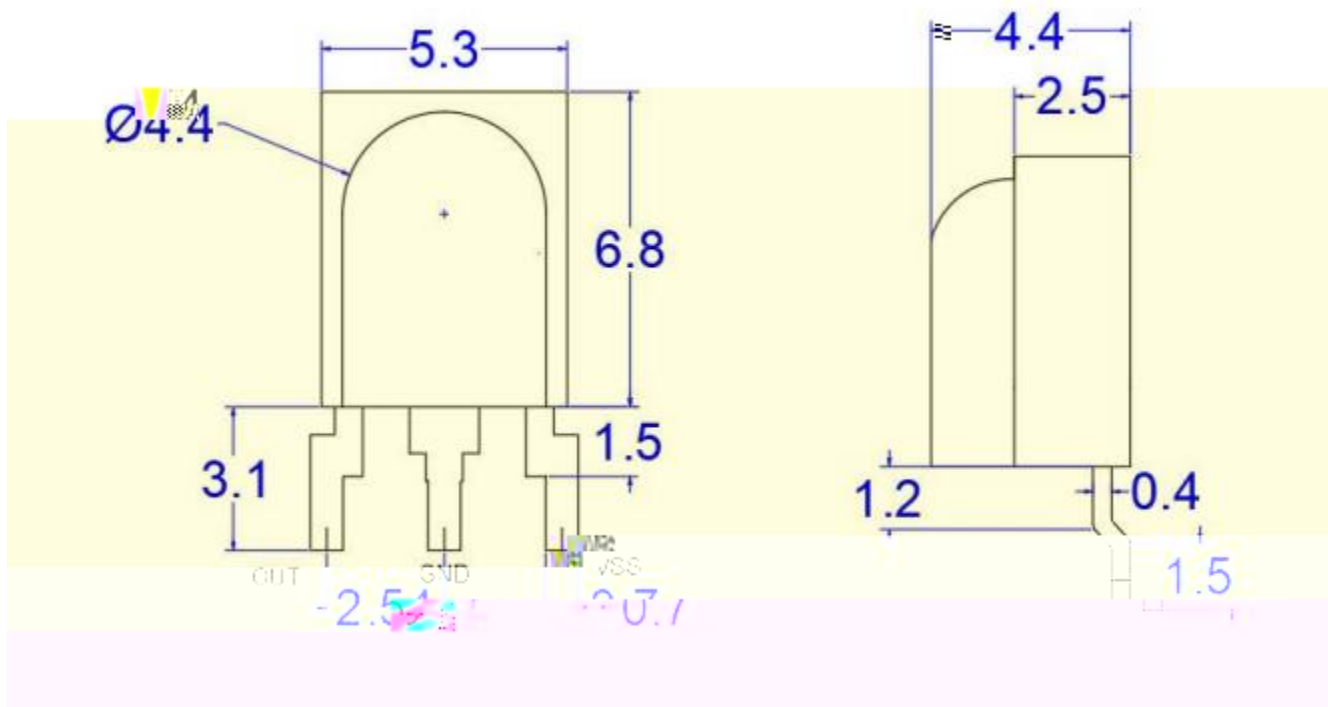


(Note)


Dime



防潮防静电包装 Moisture Proof and Anti-Static ESD Foil Bag

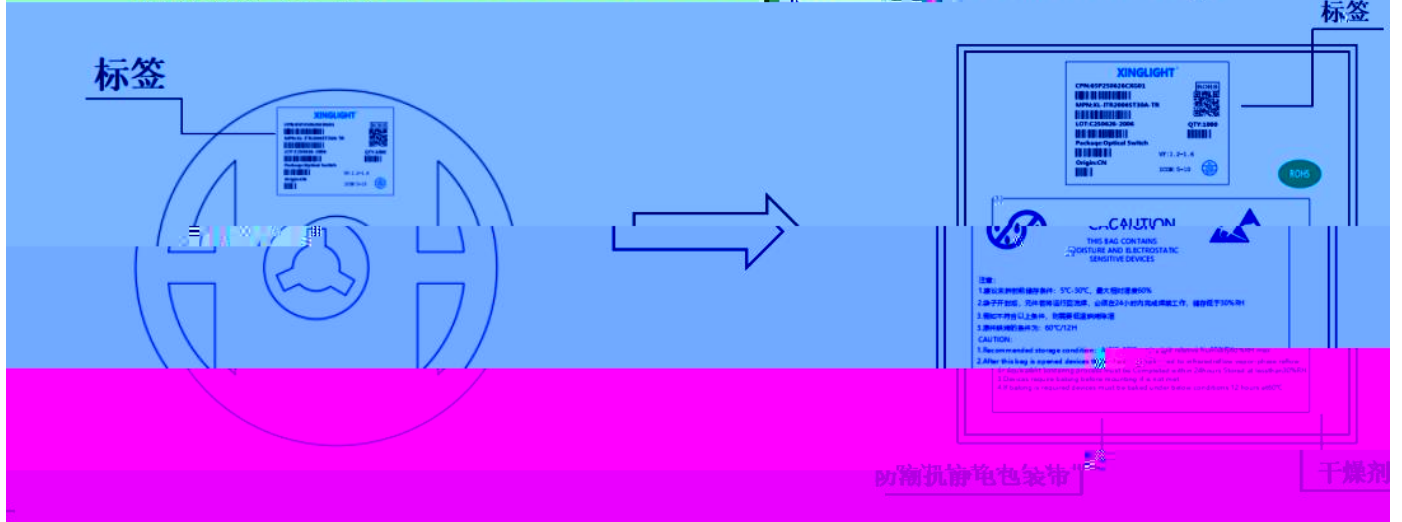

外包装箱 Cardboard Box

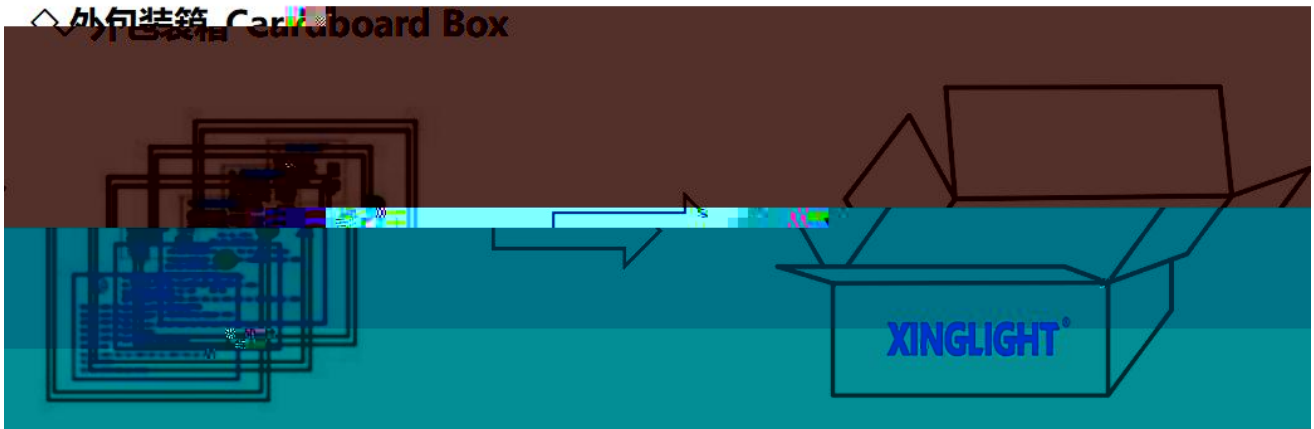

标签说明 Label Expansion

XINGLIGHT	
CHANGCHENG ELECTRONICS	星光灯
NO. 10, HONGKONG ST.	星光灯
SHENZHEN, P.R. CHINA 518000	星光灯
LOT# 200806 2008	星光灯
QTY 2000	星光灯
Package: Original	星光灯
ITEM: 5-10	星光灯
ITEM: 5-10	星光灯



(

1.

W

300

3

LED

Manual welding is recommended only for repair and heavy industry situations. A soldering iron of less than 30 W is recommended to be used in Hand Soldering. Please keep the temperature of the soldering iron under 300 while soldering. Each terminal of the LED is to go for less than 3 second and for one time only.

Be careful because the damage of the product is often started at the time of the hand soldering.

2. :

Use the conditions shown in the under Figure of Pb-Free Reflow Soldering.





(

3. :

30

3

50

30

LED



(1)



Precautions (2)

:

