

YL D7504S172



ESMM 红发红单孔灯座



特点 (Features) :

- * : 6.2*6.2*14mm
- Appearance dimension (: 6.2*6.2*14mm
- * : /
- Luminous color and colloid: Red Light /Red colloid
- * ROHS
- Environmental protection products meet ROHS requirements
- * MSL :2
- Moisture sensitivity level MSL : 2 levels
- * EIA
- EIA standard packaging
- *
- Long operating life
- *
- Reduced maintenance costs
- *
- High energy efficiency, fast startup




应用领域 (product application)


- *
- Internet of Things
- *
- medical treatment
- *
- converter
- *
- Storage servers and communication
- *
- Status indicator
- *
- Electronic testing instruments



目录



电性参数



亮度分档

:

代码	最小值	最大值	单位	测试条件
A4	300	400	mcd	IF=20mA
A5	400	500		
A6	500	700		
A7	700	900		

亮度误差±10% Brightness error±10%

电压分档

:

代码	最小值	最大值	单位	测试条件
N12-7	1.8	2.0	V	IF=20mA
N12-8	2.0	2.2		
N12-9	2.2	2.4		


电压误差±0.1V Voltage error±0.1V

波长分档

:

代码	最小值	最大值	单位	测试条件
HR01	615	620	nm	IF=20mA
HR02	620	625		
HR03	625	630		
HR04	630	635		

波长误差±1nm Wavelength error±1nm







可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Qty	Fail qty
	Working life	Ta=25 ± 5 , IF=20mA	1000hrs	22 PCS	0/1
Endurance test	High temperature and high humidity experiment	Ta= 85			



外形尺寸

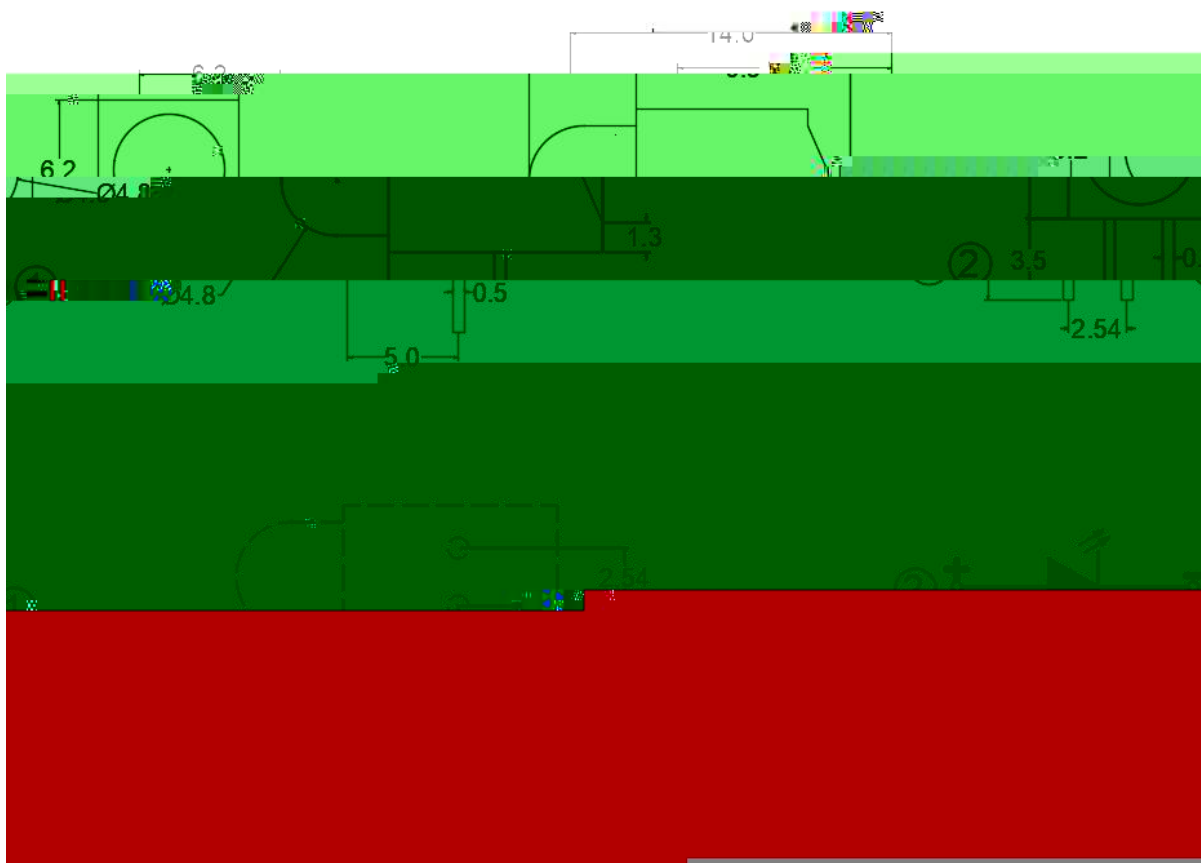

(Note)

1.
Dimensions are in millimeters.
2. $\phi 0.25\text{mm}$.
Tolerances unless mentioned are $\phi 0.25\text{mm}$.




包装

*

In Bags


*

Moisture Proof and Anti-Electrostatic Foil Bag

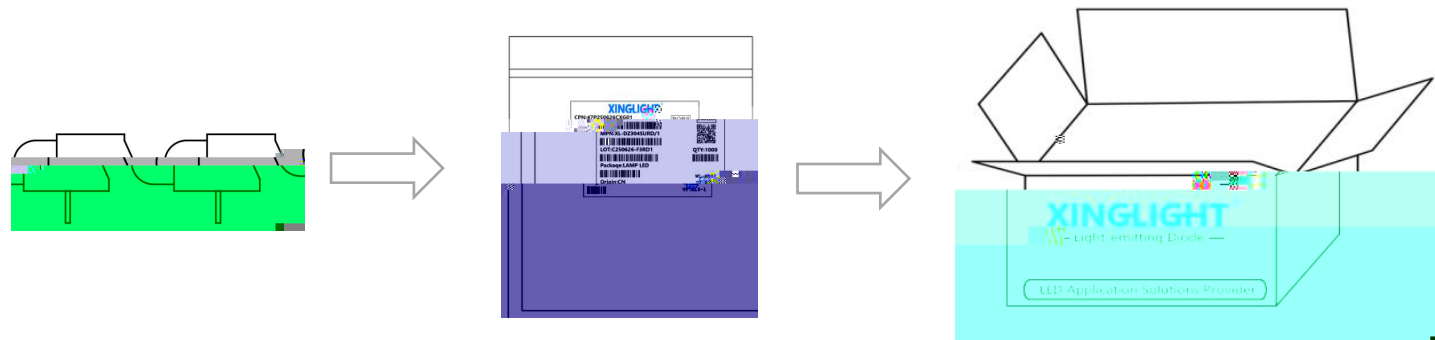

标签说明 Label Explanation..

色	CPN: 批号/档位	LOT: 日期/封装颜
	MPN: 型号	VF: 电压代码
	WL: 波长代码	IV: 亮度代码
	ORIGIN: 产地	QTY: 数量
	PACKAGE: 封装	



使用注意事項 ()

1、貯蔵:


* LED 30 70% LED

Storage environment of LED with temperature not exceeding 30 and relative humidity not exceeding 70%.It is recommended that LDE be used in the original box for no more than three months. If longer storage time is required, put it in the drying box and add desiccant or filled with nitrogen.

2、静电:

*

D E



使用注意事项 ()

4、其他事项:

*

*When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might