

XL-IRM0038C-38B

技术数据表 Technical Data Sheet



PIN

IC,

目录

Catalo

电性参数
Electrical Characteristics.....3

典型特性曲线
Typical Characteristic Curves.....7

可靠性实验
Reliability Test Items And Conditions.....8

外形尺寸
Outline Dimensions.....9

包装
Packaging.....10

使用注意事项
Precautions.....11

电性参数

Electrical Characteristics

Absolute Maximum Ratings Ta=25

Parameter	Symbol	Rating	Unit
			6

9=52 UU U

product




Parameter	Symbol	Min.	Typ	Max.	Unit
	VDD	2.7	-	5.5	V
	FM	-	37.9	-	KHZ



接收距离分档:
Receive distance grading



代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions



典型特性曲线

Typical Characteristics Curves

Test waveform

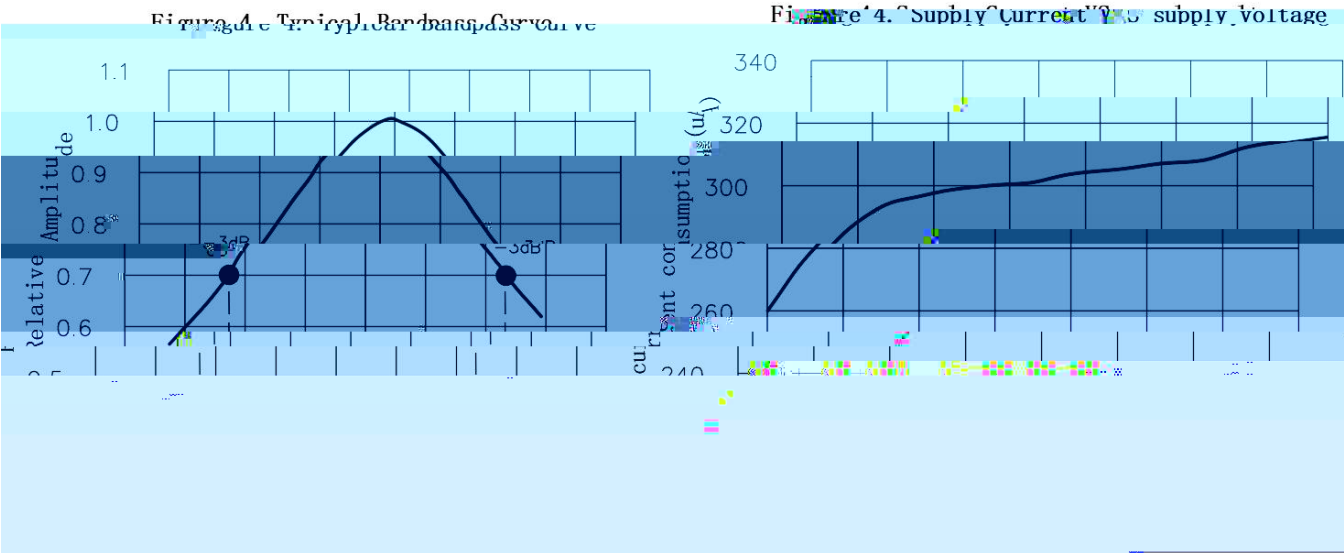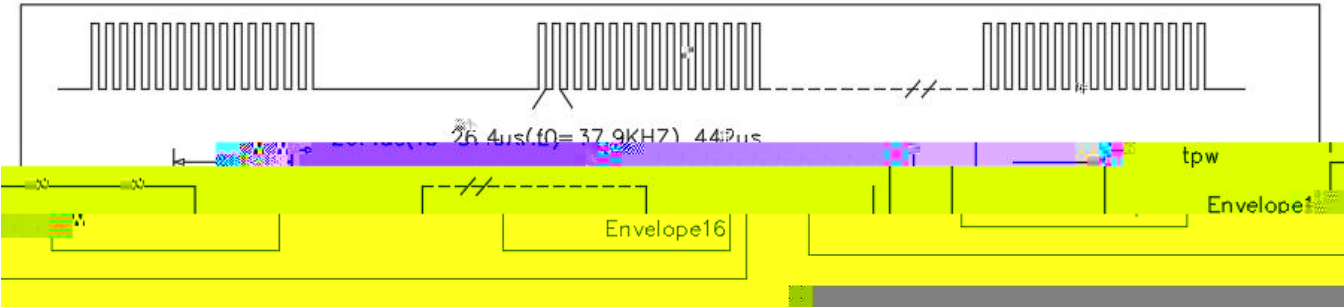


可靠性试验

Reliability Test Items And Conditions


* Reliability Test Project

	260 ± 5	5	20	20
	100PF 1.5KΩ , 4KV ,		20	20
	10-50HZ/1min 1.5mm X Y Z/30min	30	20	20
	85 ± 2	240	20	20
	-20 ± 2	240	20	20
	85 85%	240	20	20
	-20 30 +85 30	10	20	20
	2.5N 2		20	20



外形尺寸

Outline Dimension


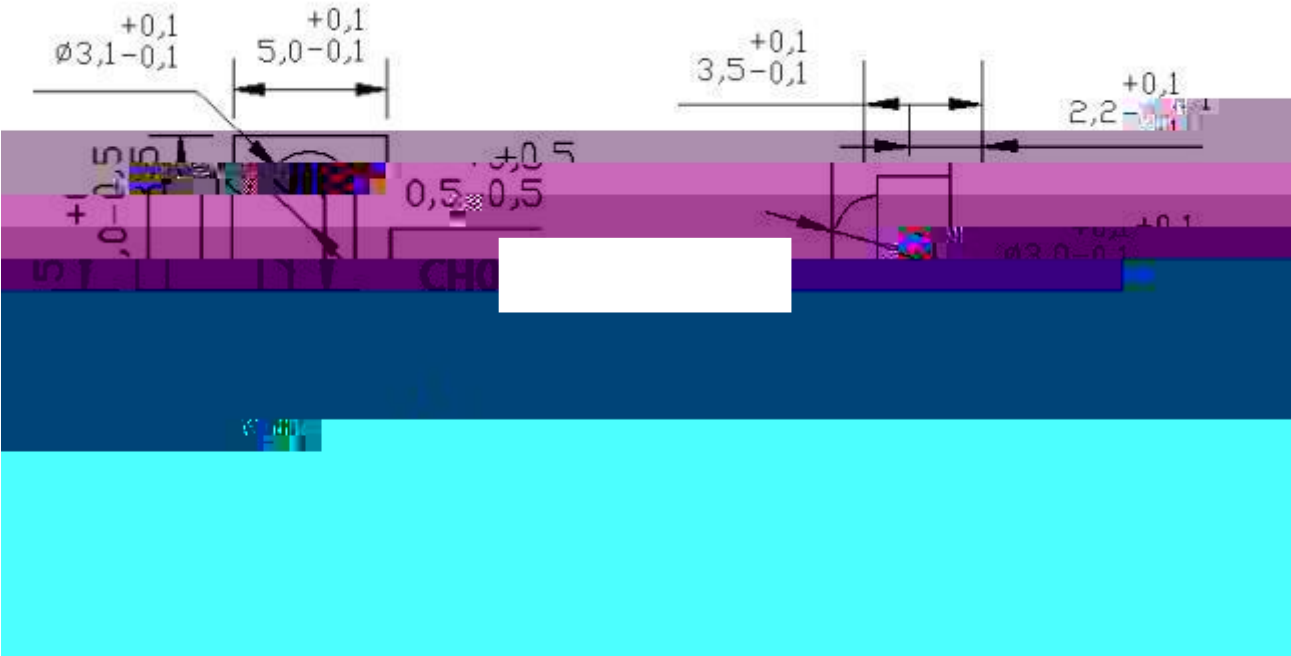


- 1.
2. mm .

包装(1)


Packaging(1)

载带与圆盘尺寸 Belt and disk dimensions

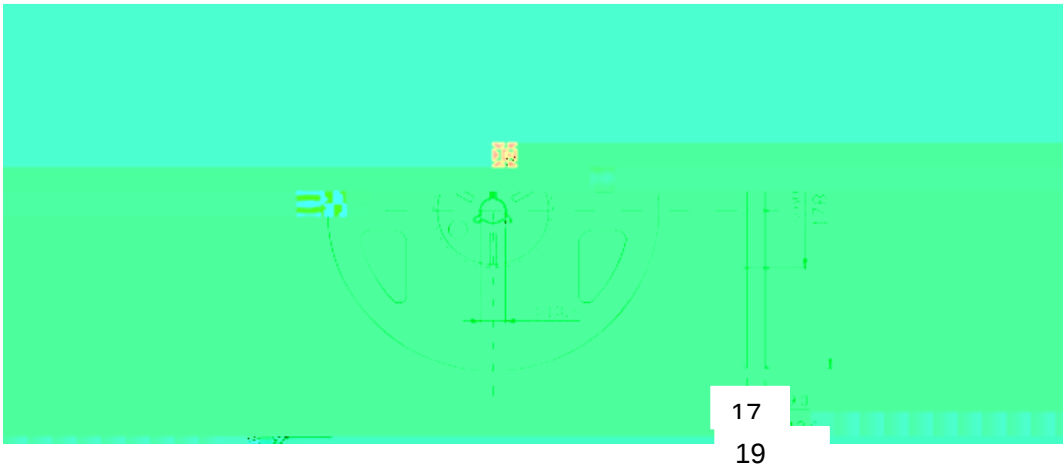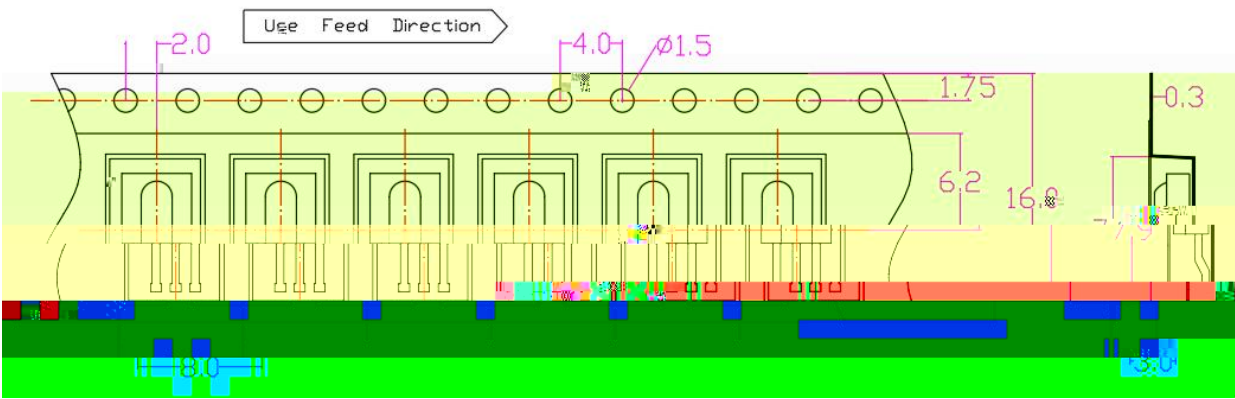

2.

圆盘及载带卷出方向及空穴规格 Disk and carrier belt direction of roll and hole dimensions

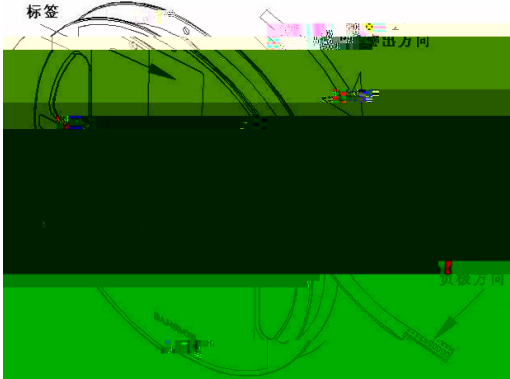

Packaging (2)

[illegible][illegible]

焊接指南 (1)

Guideline for Soldering (1)


使用烙铁手工焊接

Hand Soldering

30

2. 回流焊接:

Reflow Soldering:

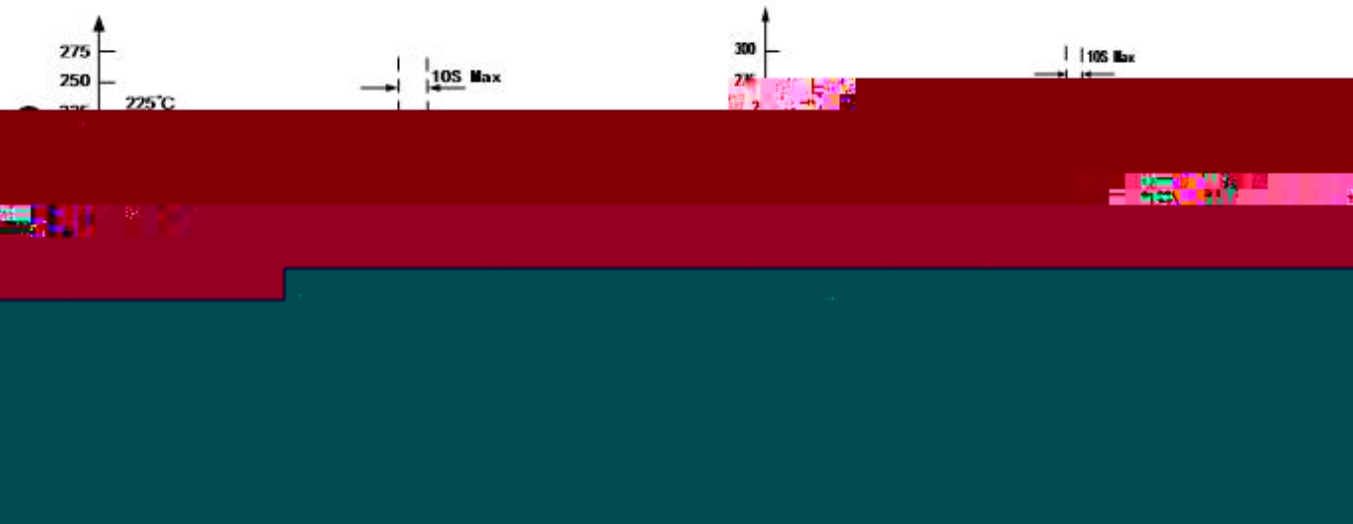

焊接指导 (2)

Guideline for Soldering (2)

3. 

Cleaning

* 注意:

PCB

* Note:

使用注意事項 (1)


Precautions (1)

使用注意事项 (3)

Precautions (3)

3. 其他事项:

Others



4. 眼睛保护忠告:

Safety Advice For Human Eyes