






电性参数

Symbol	Parameter	Min	Max	Unit
--------	-----------	-----	-----	------

Ta=25

(, q

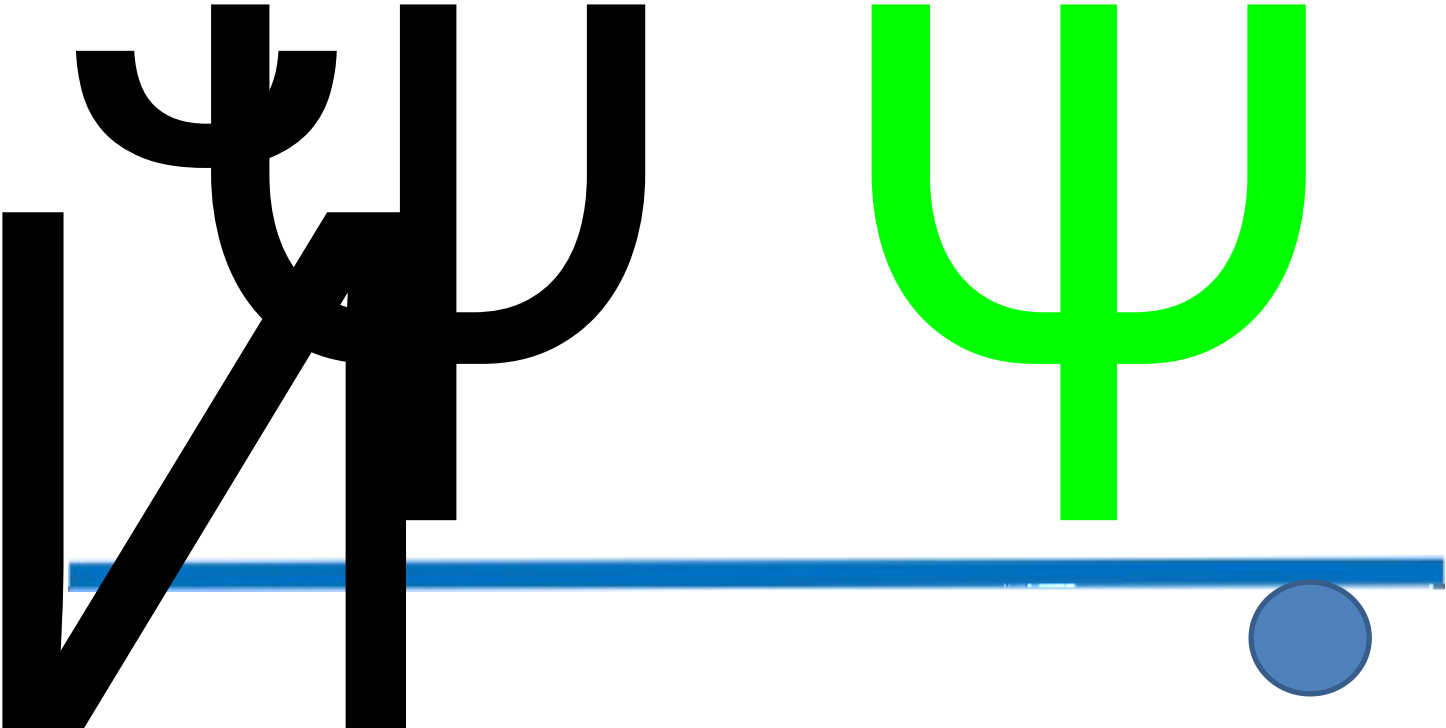

XINGLI

ISRWC

Preheating temperature: <300℃; Preheating time: <3s
Welding temperature: <300℃; Welding time: 3-10s
Soldering temperature: 235-245℃; Soldering time: <6s
Preheating temperature for tin immersion and wave soldering (not exceeding 120℃, with stable heating), soldering temperature: 235-245℃ (search for optimal temperature), soldering time: <6s

Exceeding the above conditions leads to a sharp increase in digital tube failure

When in use, the current and voltage must be correct; Add current limiting resistors to segments and decimal points;

The product should not be stored or used in corrosive gases, and should not be exposed to air for too long, otherwise it may cause oxidation;

All devices and instruments that come into contact with digital devices must be grounded

EX OW6

