

IC,
REACH PIN
ROHS

This product contains a high-speed and high sensitivity
pin photo diode and Low power consumption, high gain
Preamplifier Ic Adopting epoxy resin plastic encapsulated semi
circular spherical packaging Dual shielding and anti-interfere


目次

.....

[illegible]

9. $\frac{d}{dx} \ln x = \frac{1}{x}$

av/ sæt Y7

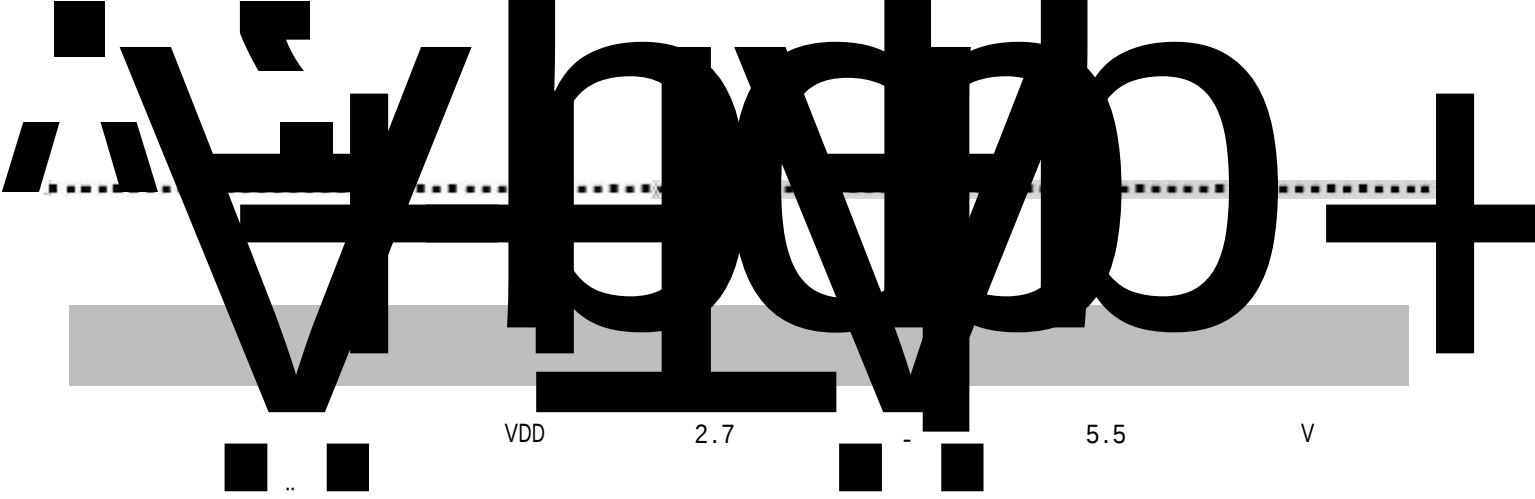


Minimum Burst Length t_{burst} (number of pulses per burst) t_{burst}	10 pulses
Minimum Burst Gap time t_{burst_gap} (number of pulses per burst) between two burst t_{burst_Gap}	12 pulses
Minimum data pause time (for full frame repeat code)	25 msec


Toshiba	o	Sony 20 bit	o
NEC	o	Matsushita	-
RC5/6 Philips	o	Mitsubishi	-
RCA Thompson	-	Zenith	-
Sharp	-	JVC	-
Sony 12bit	-	Continuous code	-
Sony 20bit	-	-	-

- 1.
2. 20Cm


Test conditions

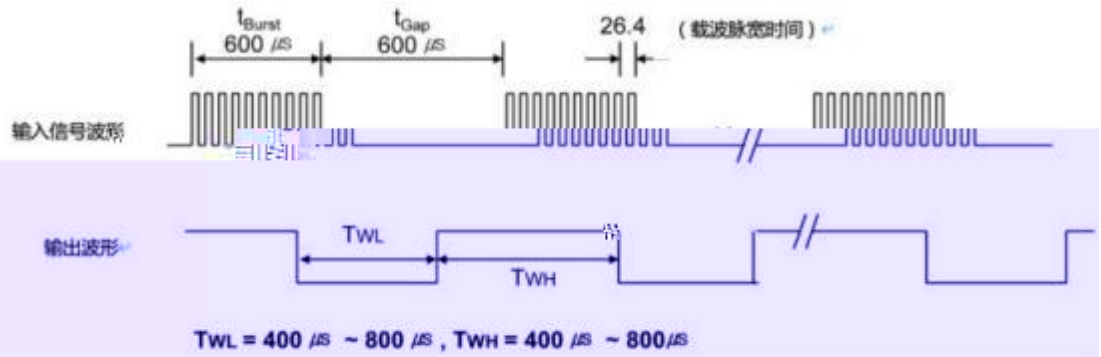


Note ; 载波频率 : 37.9KHz

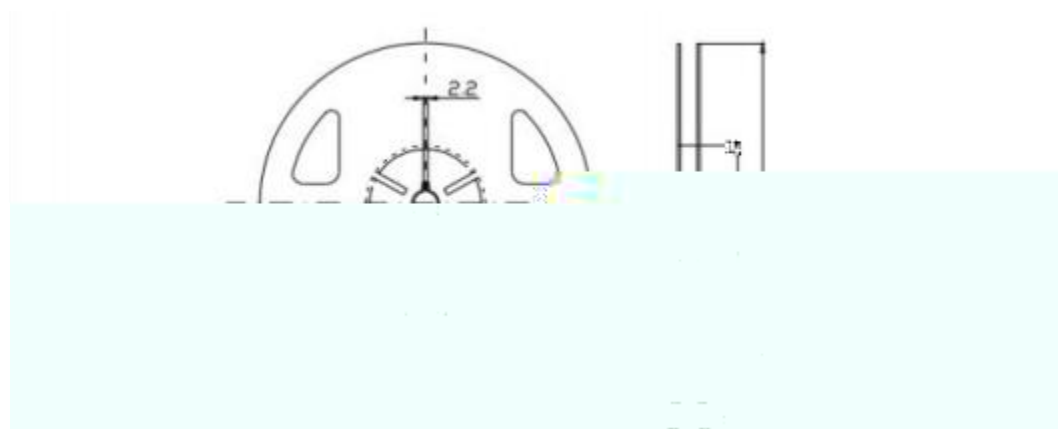

防潮防静电包装 Moisture Proof and Anti-Static Foil Bag

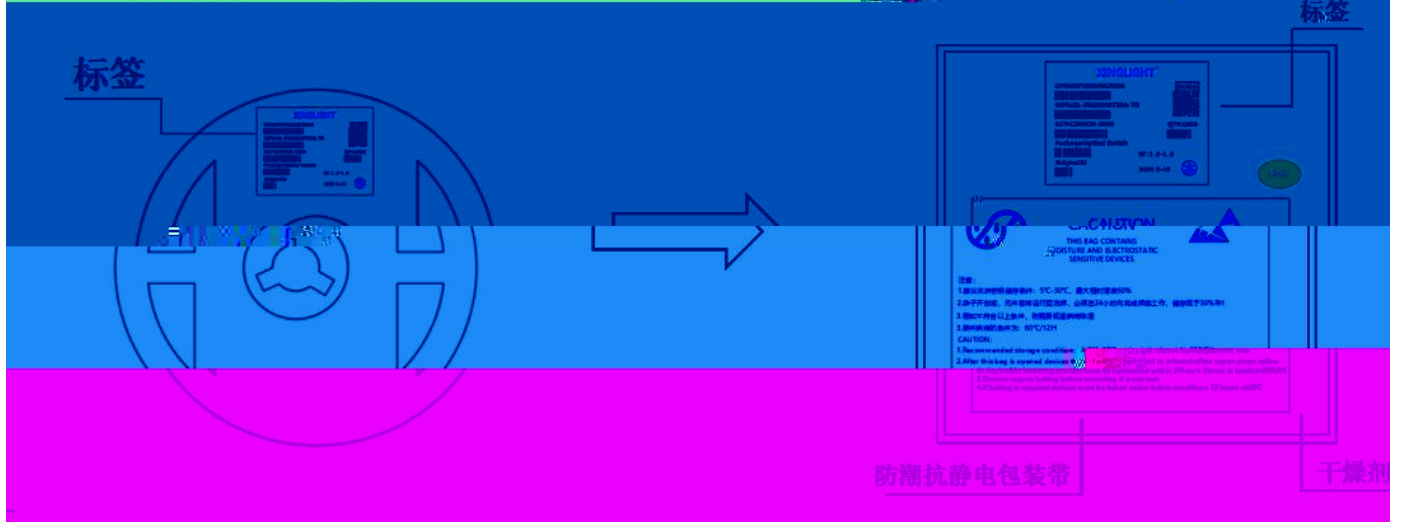

外包装箱 Cardboard Box

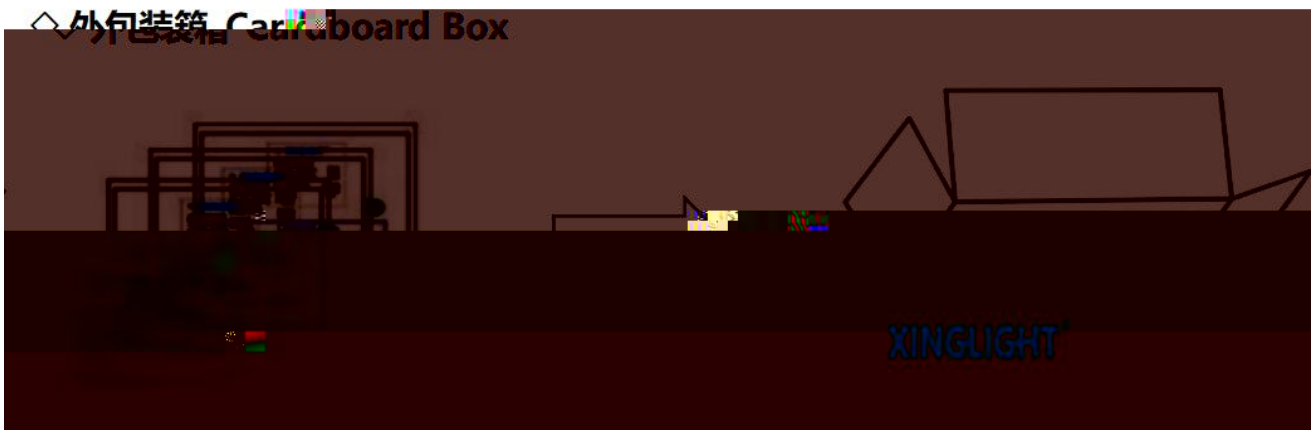

标签说明 Label Expansion





.....

.....

.....





3

Precautions (3)

