

This product contains a high-speed and high sensitivity pin photo diode and Low power consumption, high gain Preamplifier Ic Adopting epoxy resin plastic encapsulated semi circular spherical packaging Dual shielding and anti-interfere

This product contains a high-speed and high sensitivity pin photo diode and Low power consumption, high gain Preamplifier Ic Adopting epoxy resin plastic encapsulated semi circular spherical packaging Dual shielding and anti-interfere



catalogue




:



)

)



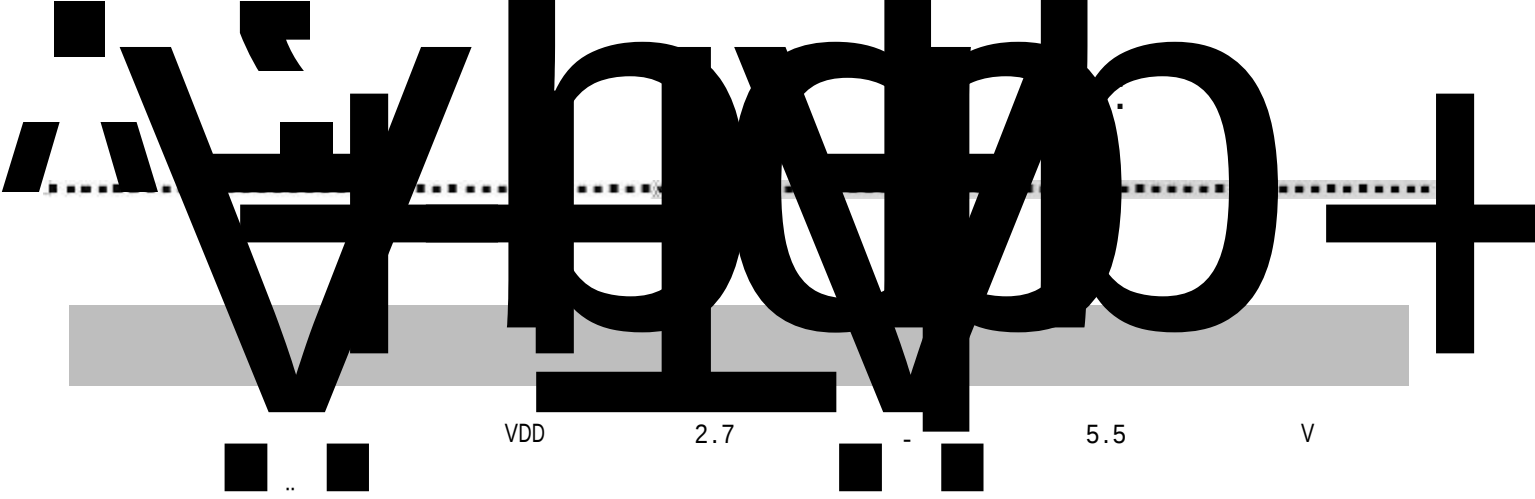


Minimum Burst Length t_{burst} (number of pulses per burst) t_{burst}	10 pulses
Minimum Burst Gap time t_{burst_gap} (number of pulses per burst) between two burst t_{burst_Gap}	12 pulses
Minimum data pause time (for full frame repeat code)	25 msec

Toshiba	o	Sony 20 bit	o
NEC	o	Matsushita	-
RC5/6 Philips	o	Mitsubishi	-
RCA Thompson	-	Zenith	-
Sharp	-	JVC	-
Sony 12bit	-	Continuous code	-
Sony 20bit	-	-	-

- 1.
2. 20Cm




Test conditions

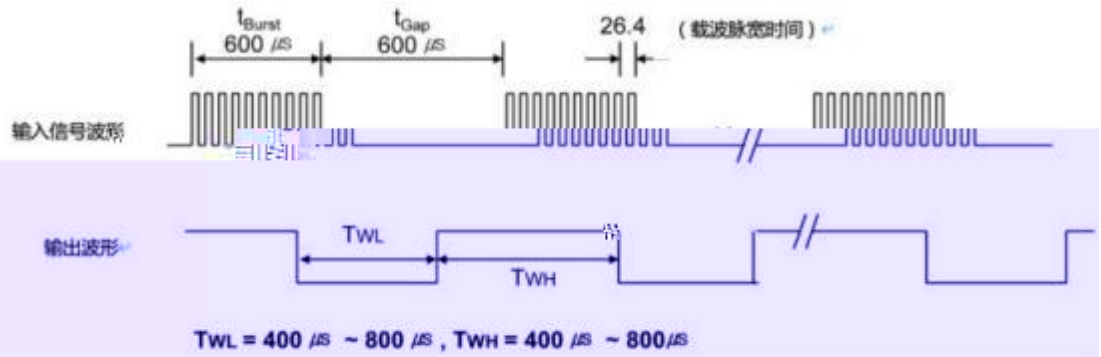

Note ; 载波频率 : 37.9KHz


⋮



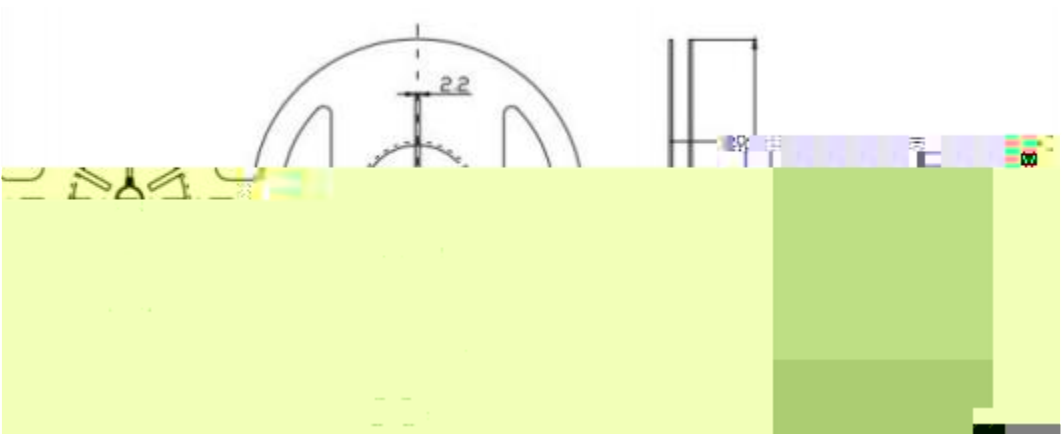


()


防潮防静电包装 Moisture Proof and Anti-Static ESD Foil Bag

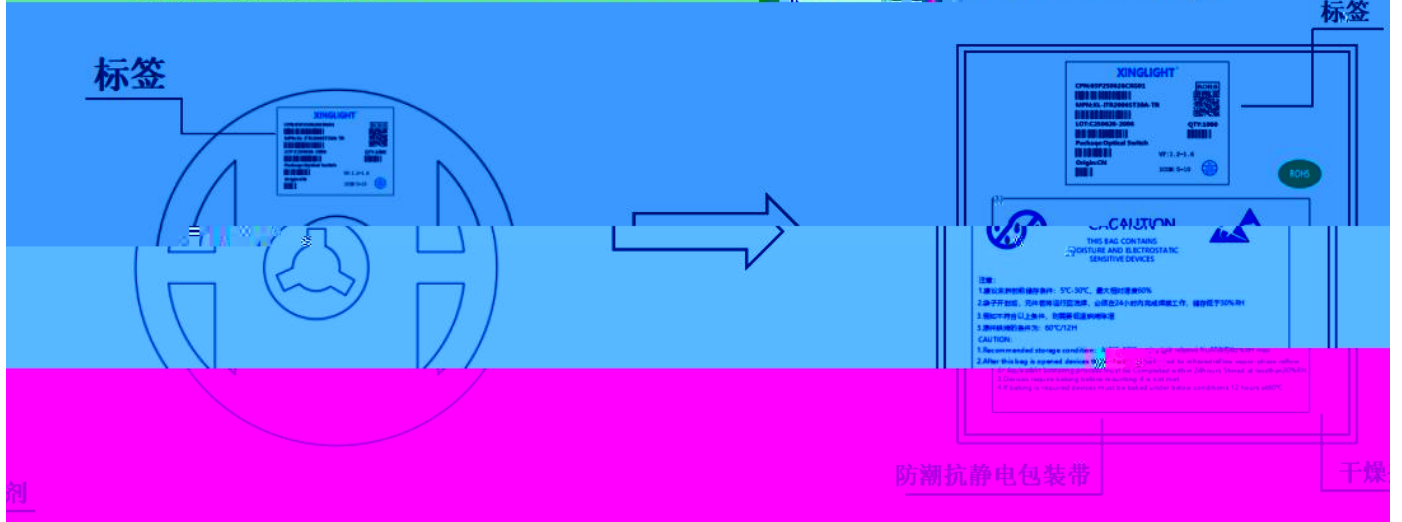

外包装箱 Cardboard Box

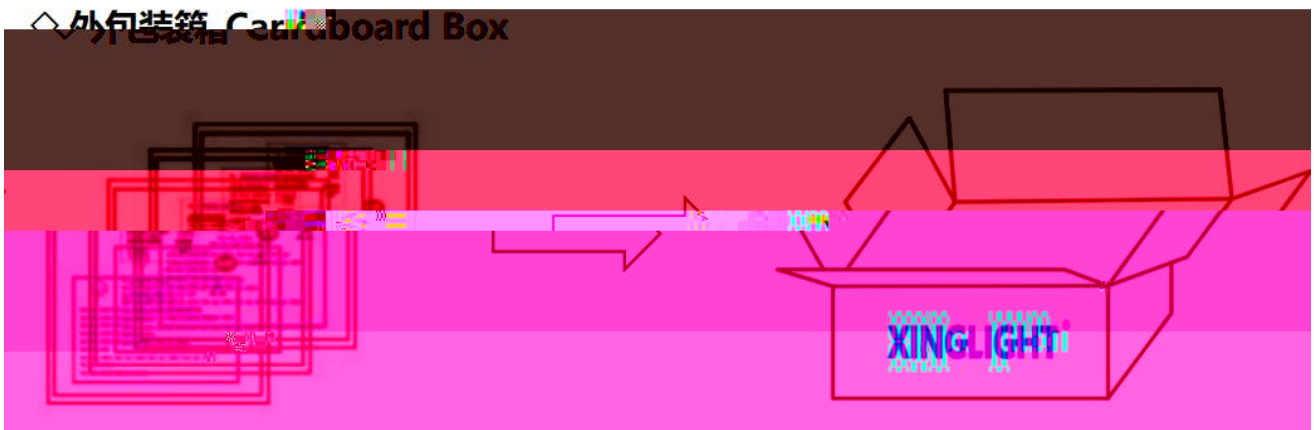

标签说明 Label Expansion

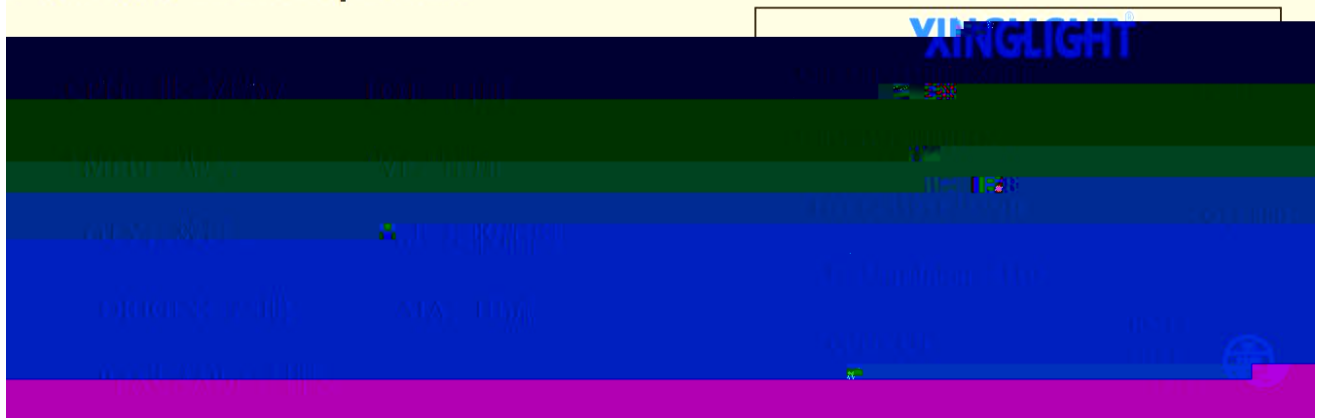

:

.....

)

30

:

.....

)

)

()