


技术数据表

红 贴片式发光二极管

特点 (Features) :

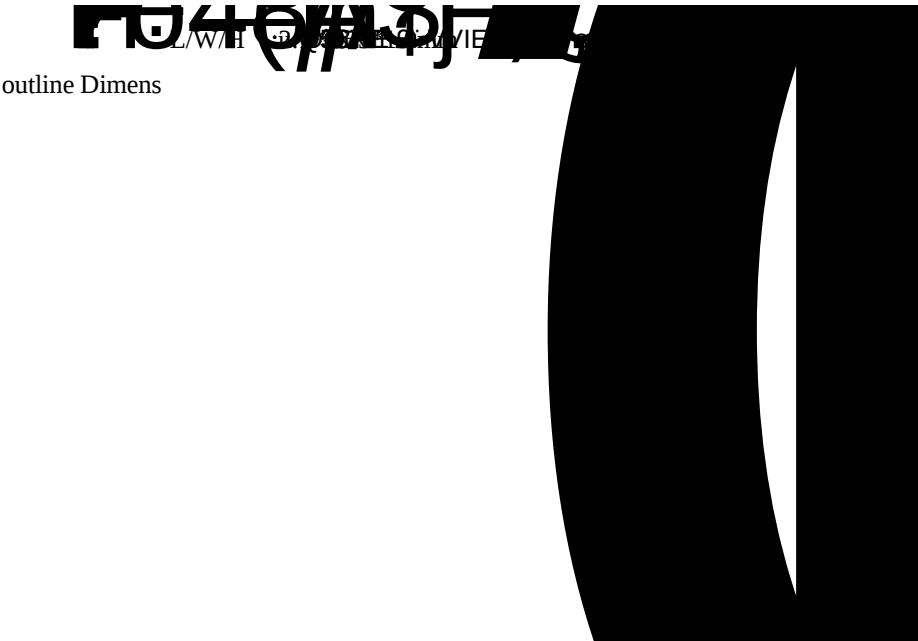

应用领域 (Applications) :



电性参数

|  |  |
|--|--|
|  |  |
|--|--|

|  |  |             |  |
|--|--|-------------|--|
|  |  |             |  |
|  |  |             |  |
|  |  |             |  |
|  |  |             |  |
|  |  |             |  |
|  |  |             |  |
|  |  | -40 ~ +85 C |  |
|  |  | -40 ~ +85 C |  |
|  |  |             |  |

\* 0.1ms 1/10

\* Note: Pulse width 0.1ms, Duty 1/10

光電參數

光電參數 Ta=25

|  |  |
|--|--|
|  |  |
|--|--|





可靠性试验

Reliability Test Items And Conditions

| Class | Test item | Testing environment | Testing time | Reference standard |
|-------|-----------|---------------------|--------------|--------------------|
|       |           |                     |              |                    |
|       |           |                     |              |                    |
|       |           |                     |              |                    |
|       |           |                     |              |                    |
|       |           |                     |              |                    |
|       |           |                     |              |                    |
|       |           |                     |              |                    |
|       |           |                     |              |                    |
|       |           |                     |              |                    |
|       |           |                     |              |                    |

MT pμæ€ (0/

Part No. : XL
















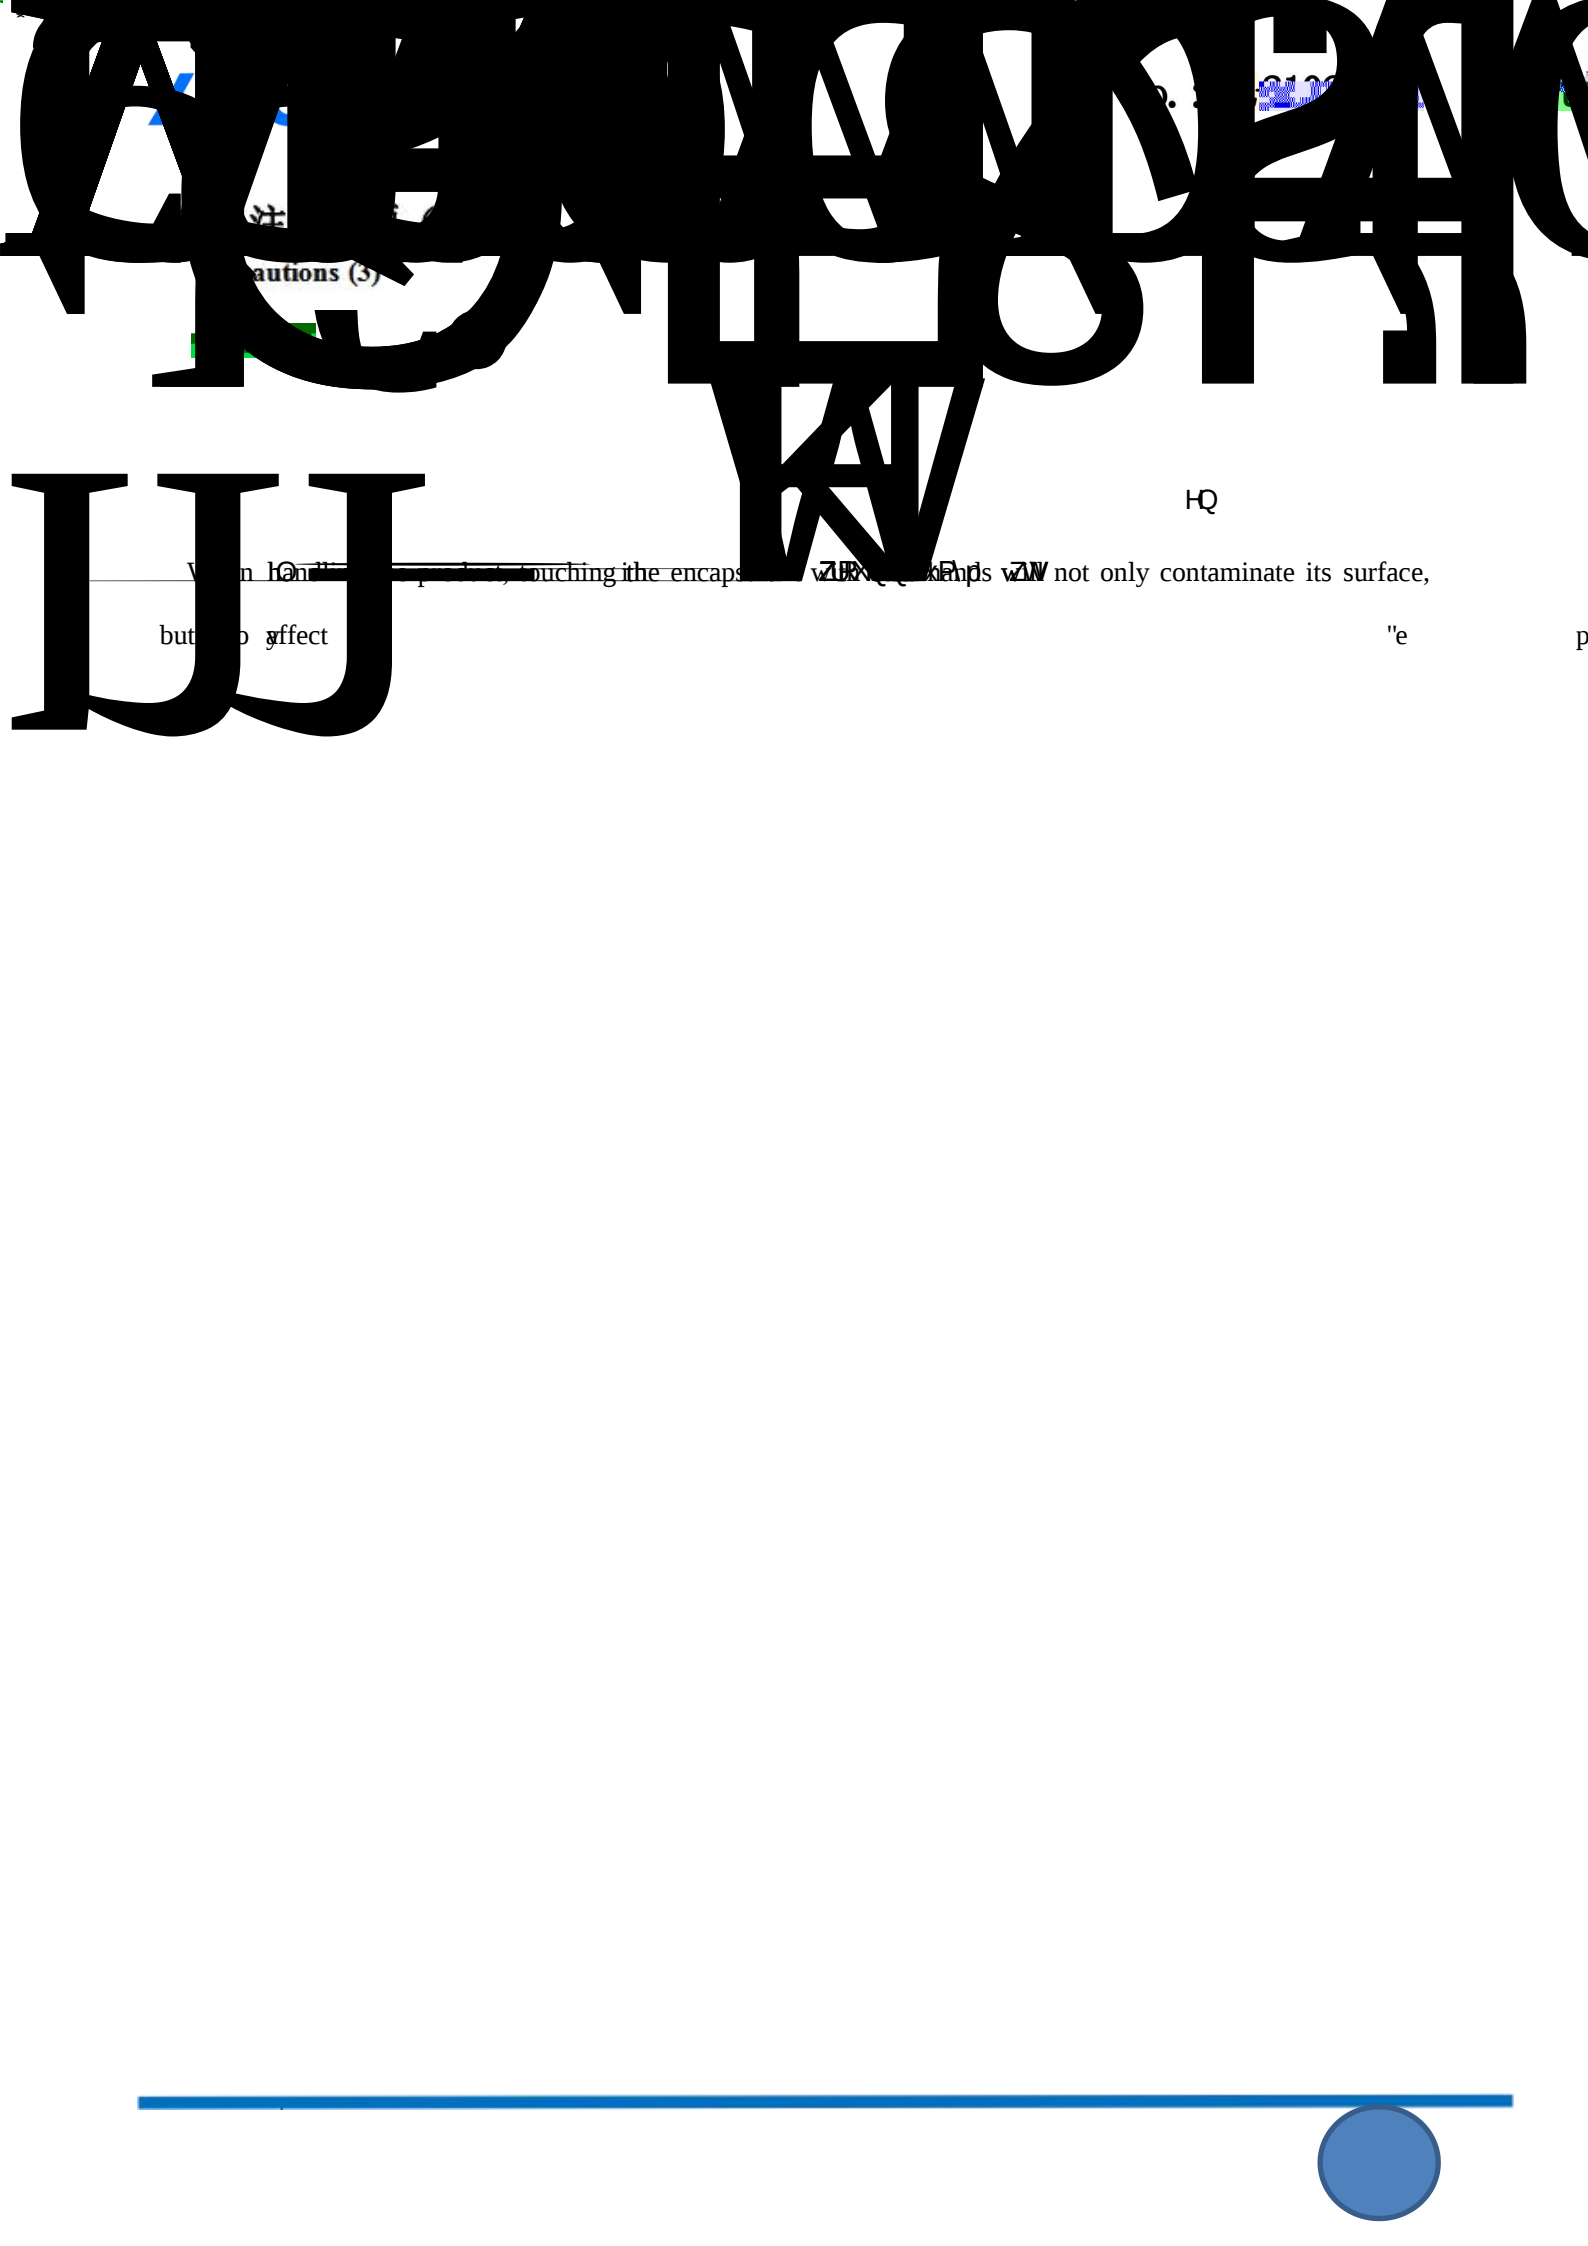

utions (3)

HQ

When the " " is touching the encapsulation, the encapsulation not only contaminate its surface, but also affect the "e" p

