


XL-504RGBW-KS

F5七彩长脚雾状快闪

技术说明书


特点（ ）：





目录

Catalogue






典型特性曲线

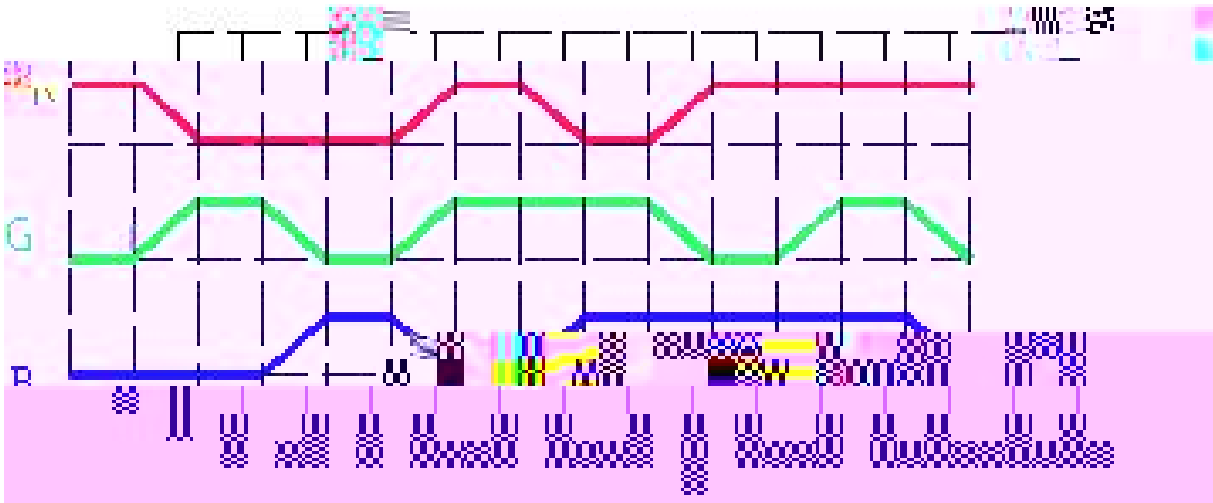

Part No. :~~XL-~~

外形尺寸

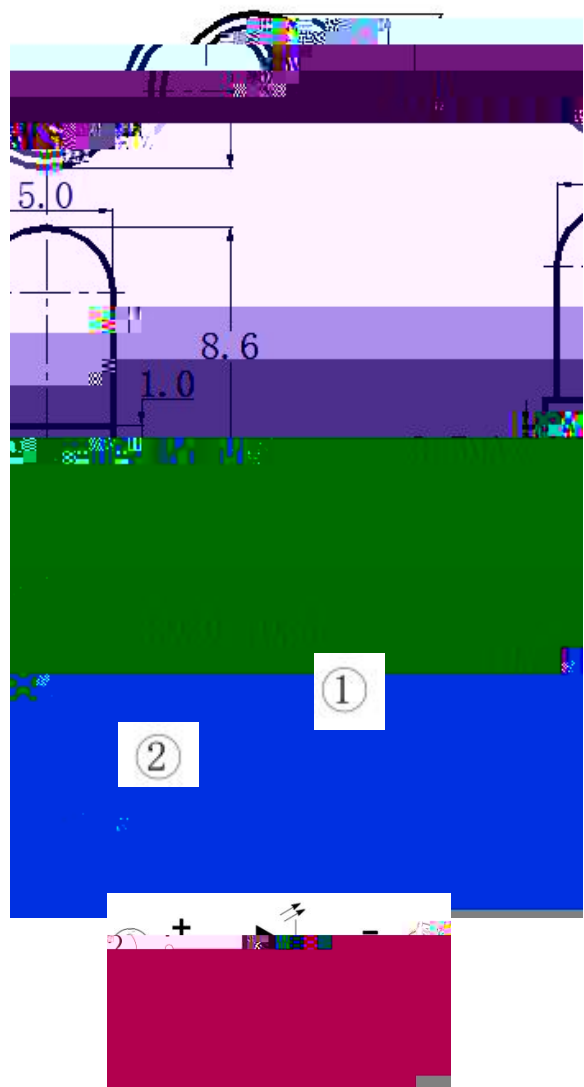


(Note)

Dimensions are in millimeters.


± 0.50

Tolerances unless mentioned are $\pm 0.50\text{mm}$.



使用注意事項 ()

1.




使用注意事項 ()

2mm

When welding, welding must be conducted below 2mm of colloid bottom. When welding, try to avoid soaking LED colloid. After welding, avoid adding external force on the pin or shaking LED colloid.

LED LED A LED LED


In the current driving mode of LED, if LED is multiple in parallel, it is recommended to use line A and add a flow limit resistance to each LED to ensure the consistent brightness of LED.



使用注意事项 ()

8、其他事项:

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



LED

The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

9、眼睛保护忠告:

LED

LED

Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.

If there are any modifications to the specification sheet, no further notice will be given

