

XL-DZ504SYGD/1

技术数据表

ESMM 绿发绿单孔灯座



特点 (Features) :

- * Appearance dimension : 6.2*6.2*14.mm
- * Luminous color and colloid: yellow Green Light /Green colloid
- * ROHS
- * Environmental protection products meet ROHS requirements
- * MSL :2
- * Moisture sensitivity level MSL : 2levels
- * EIA
- * EIA standard packaging
- * Long operating life
- * Reduced maintenance costs
- * High energy efficiency, fast startup
- * Low voltage DC drive



应用领域 (product application)

- * Internet of Things
- * medical treatment
- * converter
- * Storage servers and communication
- * Status indicator
- * Electronic testing instruments



目录


Catalogue



电性参数

Max Power Dissipation	PD	50	mW
Max Continuous Forward Current	IF	20	mA
Peak Forward Current	IFP	80	mA
Max Reverse Voltage	VR	5	V
Antistatic ability	ESD	2000	V
Operating Temperature Range	TOPR	-40 ~ +85℃	
Storage Temperature Range	TSTR	-40 ~ +85℃	
/ Lead Soldering Temperature/Time	TSOL	260 ±6S	/S

	η!!					



亮度分档

:

代码		最大值	单位	测试条件
A1	50	100	mcd	IF=20mA
A2	100	200		

电压分档


:

代码	最小值	最大值	单位	测试条件
----	-----	-----	----	------

N12-7

波长分档

:






Part No. 07504 VCD

:

25 + 5 C./N



可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Qty	Fail qty




外形尺寸

(Note)

Dimensions are in millimeters.

± 0.25




包装

*

In Bags



*

Moisture Proof and Anti-Electrostatic Foil Bag

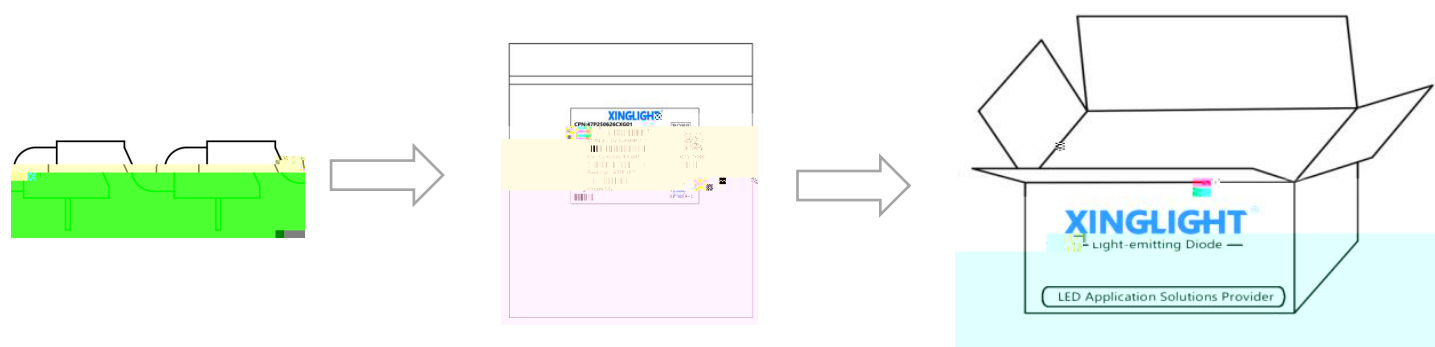

标签说明 Label Expantion


CPN: 批号/档位	LOT: 日期/封装颜色
MPN: 型号	VF: 电压代码
QTY: 数量	QTY: 数量
PACKAGE: 封装	

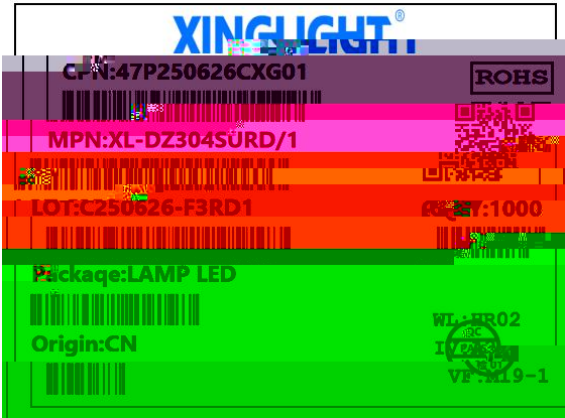

使用注意事項 ()

1、貯左.

St



使用注意事项 ()

4、其他事项:

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due