6070 [redacted] 1w） 发光二极管

特点（C ）：

* : /

Luminous color and colloid: High brightness white / Yellow colloid

* 6070

Packaging glue 6070 bracket

* 140

Luminous Angle 140 degrees

* ROHS

Environmental protection products Complied With RoHS Directive

* MSL :3

Moisture sensitivity level MSL : 3 levels

* EIA

EIA standard packaging

* SMT

Suitable for SMT automatic production

* ≤220

Suitable for reflow soldering process ≤220

应用领域（P ）：

* , ,

Building lighting, wall washing, and projection lights

* ,

Urban lighting, sculpture lighting

* stage lights;,

Billboard lighting

*

Exhibition, sports venues, shopping malls

*

mass transit

*

street lamps

目录

电性参数

曲型特性曲线

可靠性实验

外形尺寸

包装

焊接指导

使用注意事项

典型特性曲线

Typical Characteristics Curves

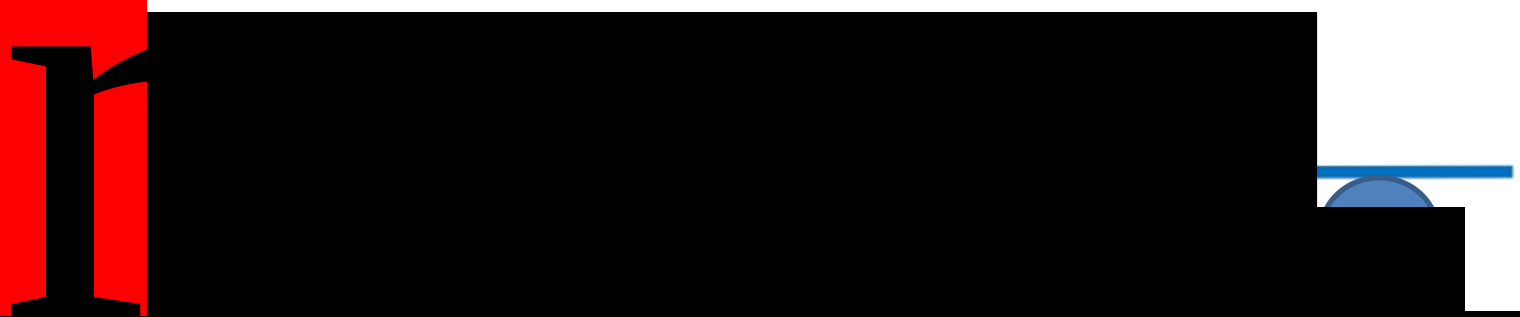

焊接指导（1）

Guideline for Solder

使用烙铁人手焊接

60W 300

3

A soldering iron of less than 60W is recommended to be used in Hand Soldering. Please keep the temperature of the

使用注意事项（2）

Precautions (2)

设计建议：

A B

LED V_F LED

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for m x