



目録







典型特性曲线

Typical Characteristics Curves



可靠性试验


Reliability Test Items And Conditions

Test Items	Reference	Test Conditions	Time	Quantity	Criterion
Solderability	JESD22-B102	155±5 ,8h; Tsol= 260±5 t=10s;	1 1 times	22	0/22
Resistance to Soldering Heat	JESD22-A106	Tsol= 260±5 t=10s; 3	3 3 times	22	0/22
ESD-HBM	JESD22-A114	HBM 250V 4 500V 4 1000V 4 2000V	3	6	0/6
High Temperature Storage	JESD22-A103	Ta=100	1000h	22	0/22
Low Temperature Storage	JESD22-A119	Ta=-40	1000h	22	0/22

Criteria For Judging Damage)

外形尺寸

Outline Dimension

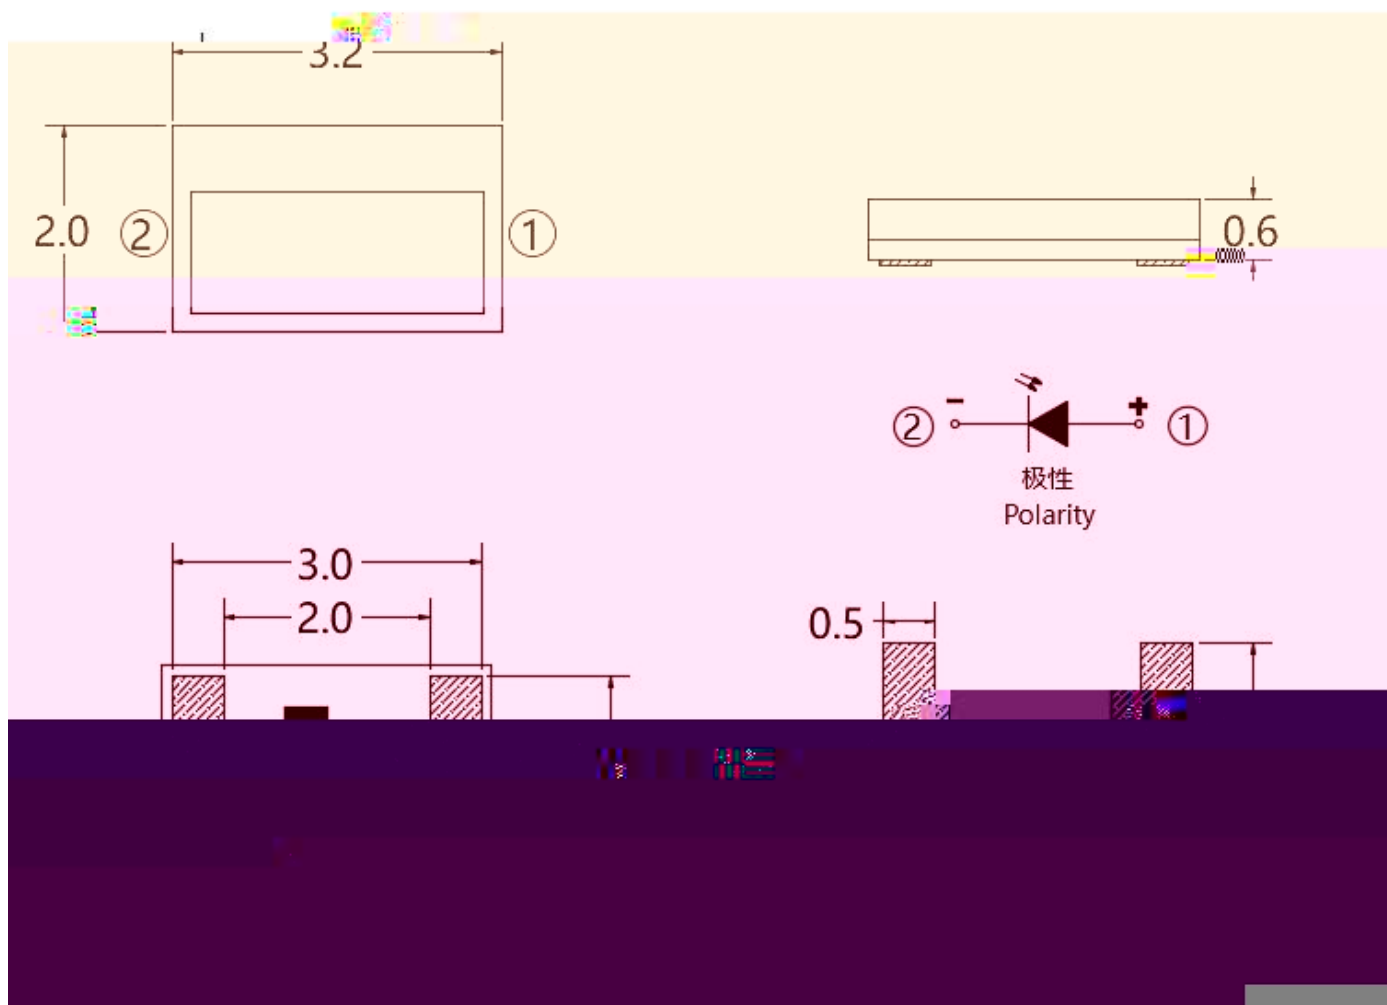

±0.1mm Tolerance is ±0.1mm unless otherwise









