典型特性曲线

Typical Characteristics Curves

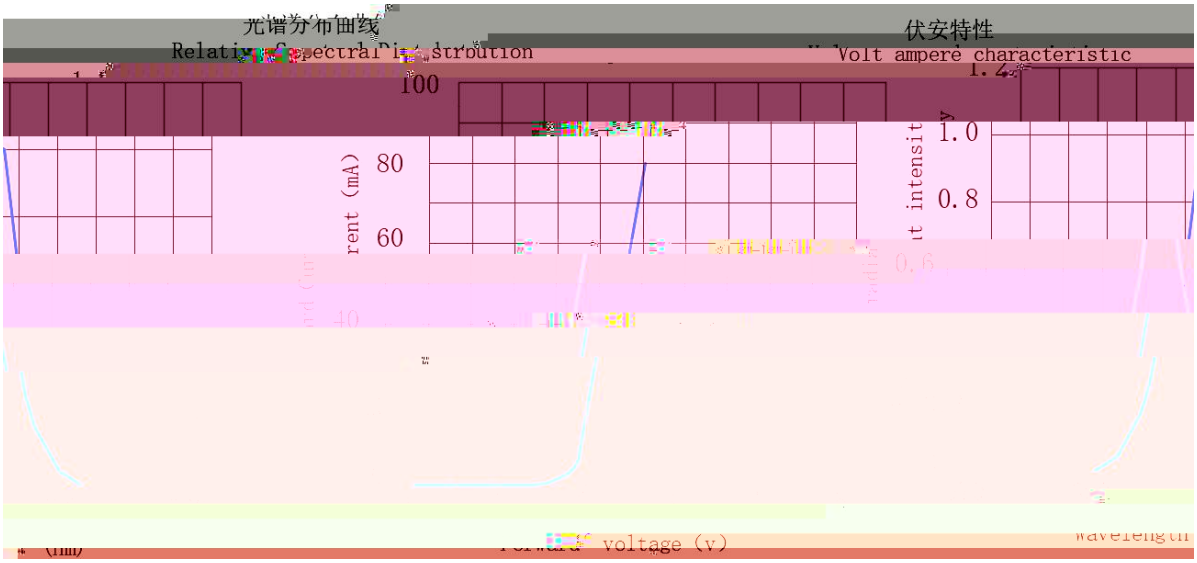

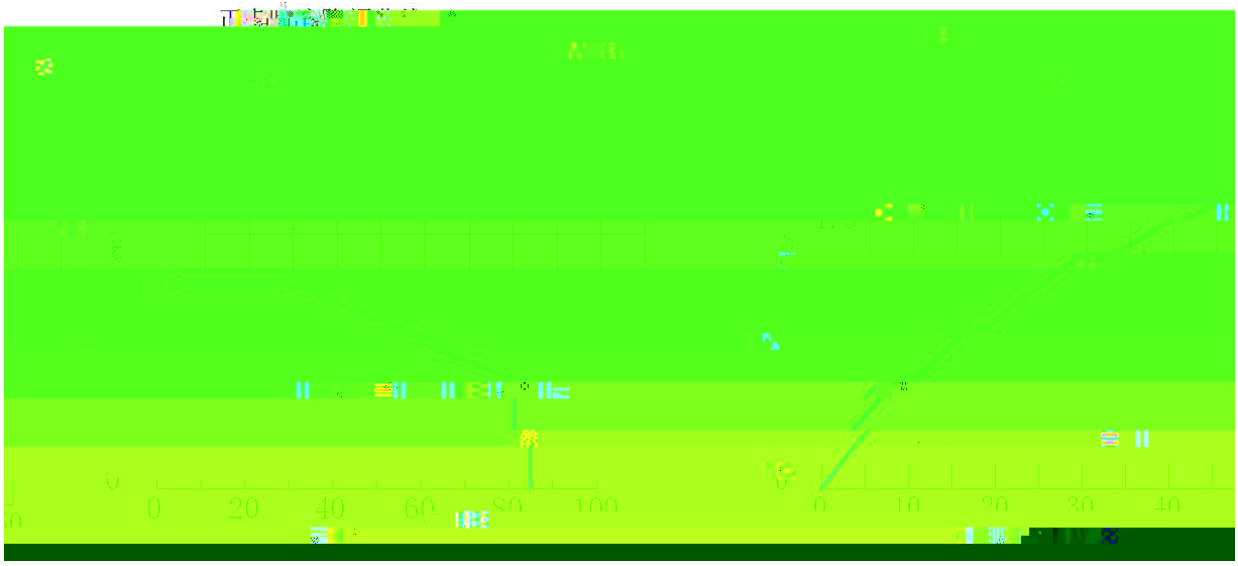

相对辐射强度与空间

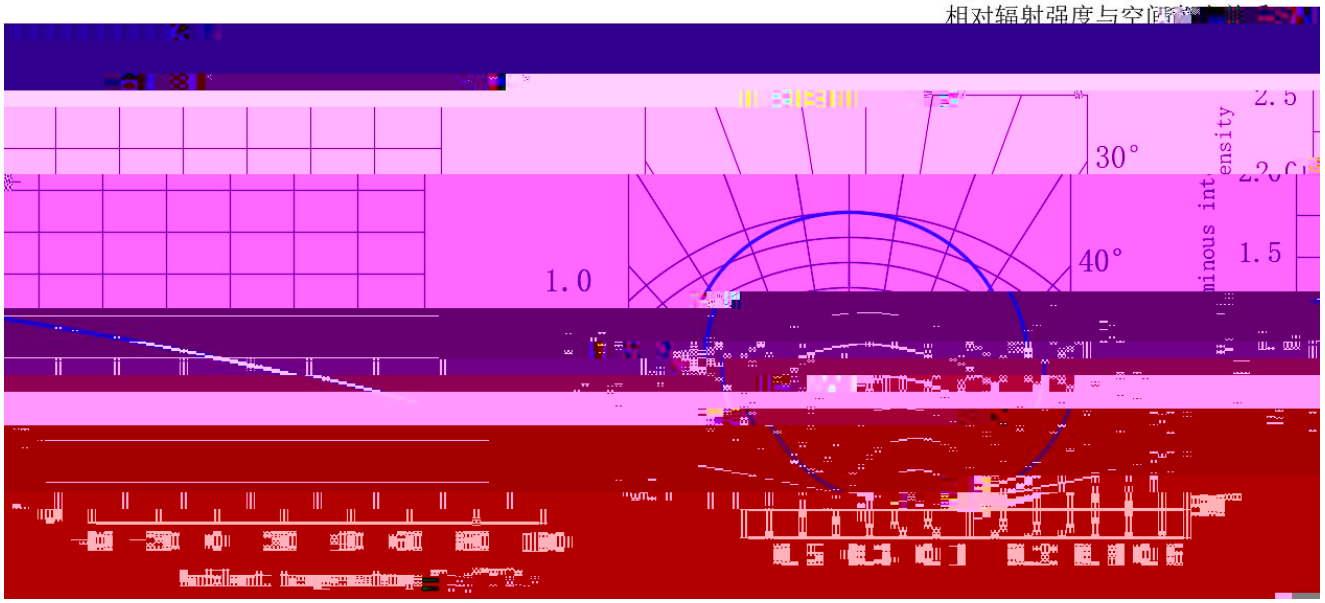

XINGLIGHT®

Part No.:XL-3806SURC

可靠性试验

Reliability Test Items And Conditions

Endurance test	Working life	20mA Continuous lighting at the maximum rated current at room	1000 -24 +72) -24hours +72hours	MIL-STD-750D:1026 MIL-STD-883D:1005 JIS C 7021:B-1
	High temperature and high humidity	IR-Reflow In-Board, 2 Times Ta= 85±5 , RH= 90 95%	240 ± 2) ± 2hours)	MIL-STD-202F:103B JIS C 7021:B-11
	High-temperature storage	Ta= 85±5	1000 -24 +72) -24hours+72hours	MIL-STD-883D:1008 JIS C 7021:B-10
	Low temperature	Ta= -40±5		JIS C 7021:B-12
	Cold and hot cycle	105 25 -55 25 30mins 5mins 30mins 5mins	100 100 Circles	MIL-STD-202F:107D MIL-STD-750D:1051 MIL-STD-883D:1010
	Hot and cold impact	IR-Reflow In-Board, 2 Times 100± 5 -40 ± 5 20mins 20mins	100 100 Circles	MIL-STD-202F:107D MIL-STD-750D:1051 MIL-STD-883D:1011
	Anti-tin test	T.sol= 260 ± 5	10 ± 1secs 2 2times	MIL-STD-202F:210A MIL-STD-750D:2031
	Infrared			
Environmental testi				

包装（2）

Packaging (2)

◇ 防潮抗靜电包装袋 Moisture Proof and Anti-Electrostic Foil Bag

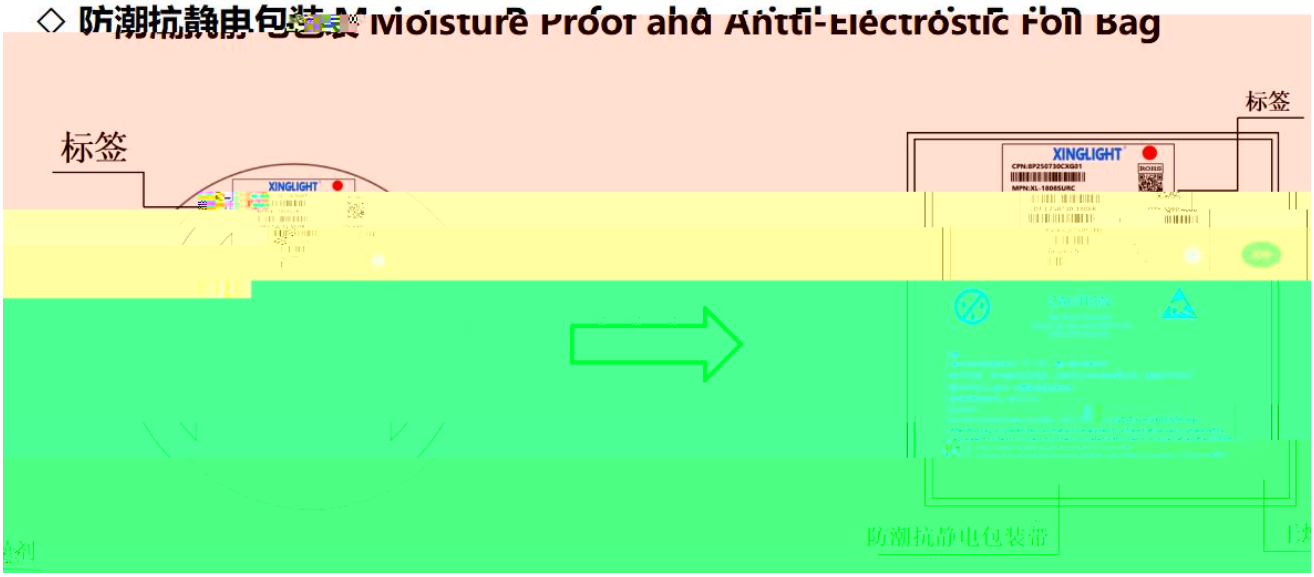

◇ 外包装箱 Cardboard Box

◇ 标签说明 Label Expantion

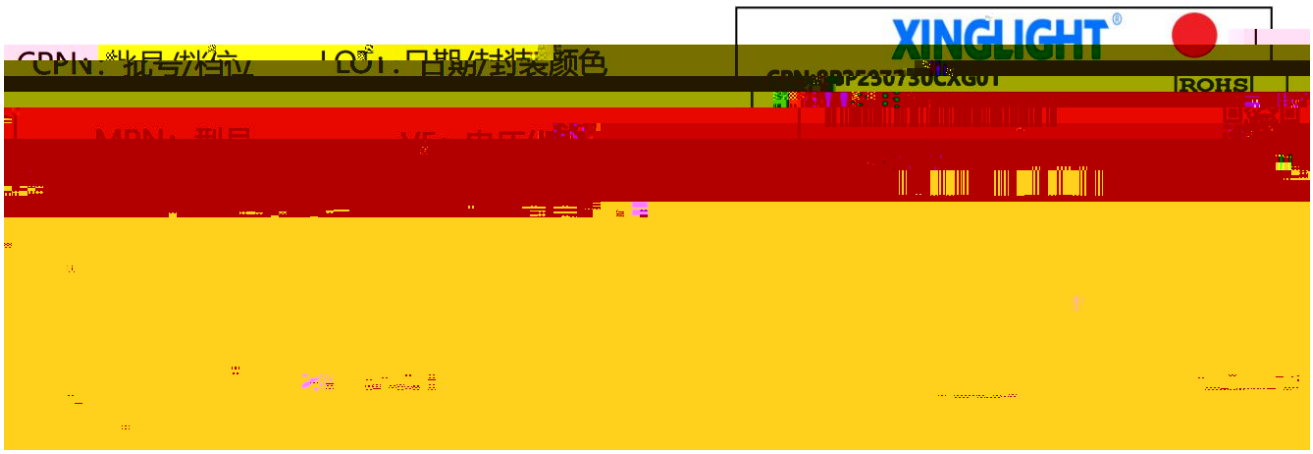

Part