XL-DZ504SYGD/1

技术数据表

F5MM 绿发绿单孔灯座

特点（ ）：

* :6.2*6.2*14.mm

Appearance dimension : 6.2*6.2*14.mm

* : /

Luminous color and colloid: yellow Green Light /Green colloid

* ROHS

Environmental protection products meet ROHS requirements

* MSL :2

Moisture sensitivity level MSL : 2levels

* EIA

EIA standard packaging

*

Long operating life

*

Reduced maintenance costs

*

High energy efficiency, fast startup

*

Low voltage DC drive

应用领域（product application）

*

Internet of Things

*

medical treatment

*

converter

*

Storage servers and communication

*

Status indicator

*

Electronic testing instruments



目录

Catalogue

Catalogue

电性参数

Max Power Dissipation	PD	50	mW
Max Continuous Forward Current	IF	20	mA
Peak Forward Current	IFP	80	mA
Max Reverse Voltage	VR	5	V
Antistatic ability	ESD	2000	V
Operating Temperature Range	TOPR	-40 ~ +85ÁC	
Storage Temperature Range	TSTR	-40 ~ +85ÁC	
/ Lead Soldering Temperature/Time	TSOL	260 Ò6S	/S

	ɸɔ					

亮度分档

代码	[redacted]	最大值	单位	测试条件
A1	50	100	mcd	IF=20mA
A2	100	200		

电压分档

代码	[redacted]	最大值	单位	测试条件
N12-7				

波长分档

: 25 + 5 C./N

可靠性试验

Reliability Test Items And Conditions

Class	Test item	Testing environment	Testing time	Qty	Fail qty

外形尺寸

(Note)

Dimensions are in millimeters.

Ñ 0.25

包装

*
In Bags

*
Moisture Proof and Anti-Electrostatic Foil Bag

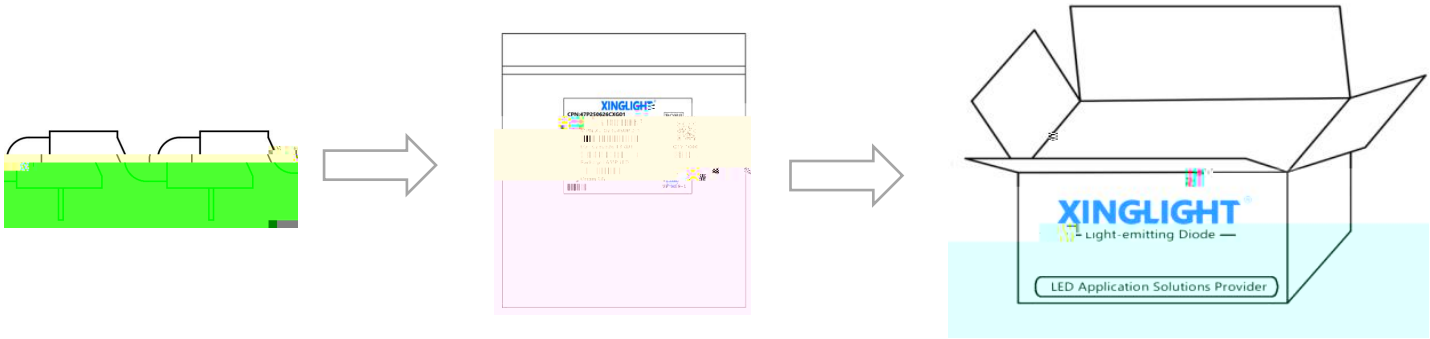

使用注意事项（ ）

1、贮存.

St



Part

使用注意事项（ ）

4、其他事项：
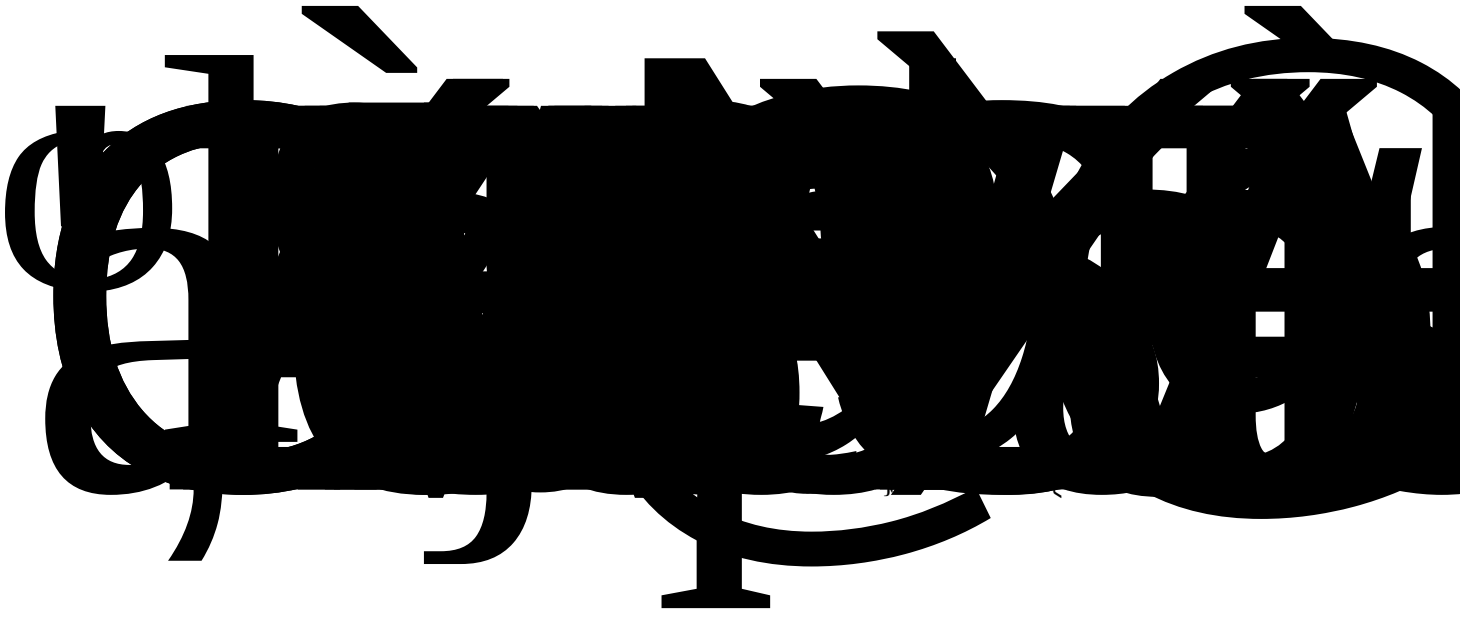
When handling the product, touching the encapsulant with bare hands will not only contaminate its surface but also affect on its optical characteristics. Excessive force to the encapsulant during handling may cause failure of the LEDs due