典型特性曲线

Typical Characteristics Curves

Fig.1- Relative Radiant Flux vs. Forward Current

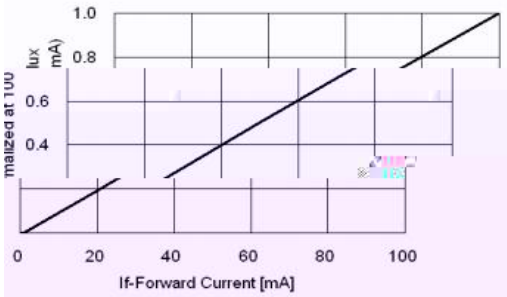

Fig.2- Forward Current vs. Forward Voltage

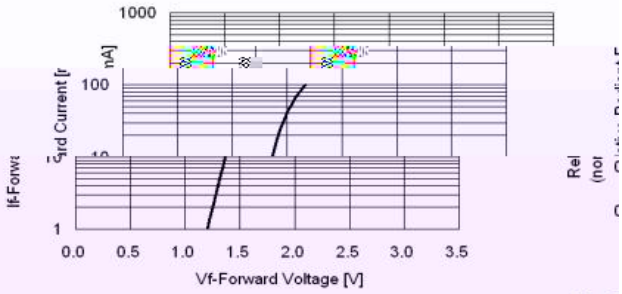

Fig.3

Relative Radiant Flux (@100mA) vs. Ambient Temperature

Fig.4-Forward Voltage (@100mA) vs. Ambient Temperature

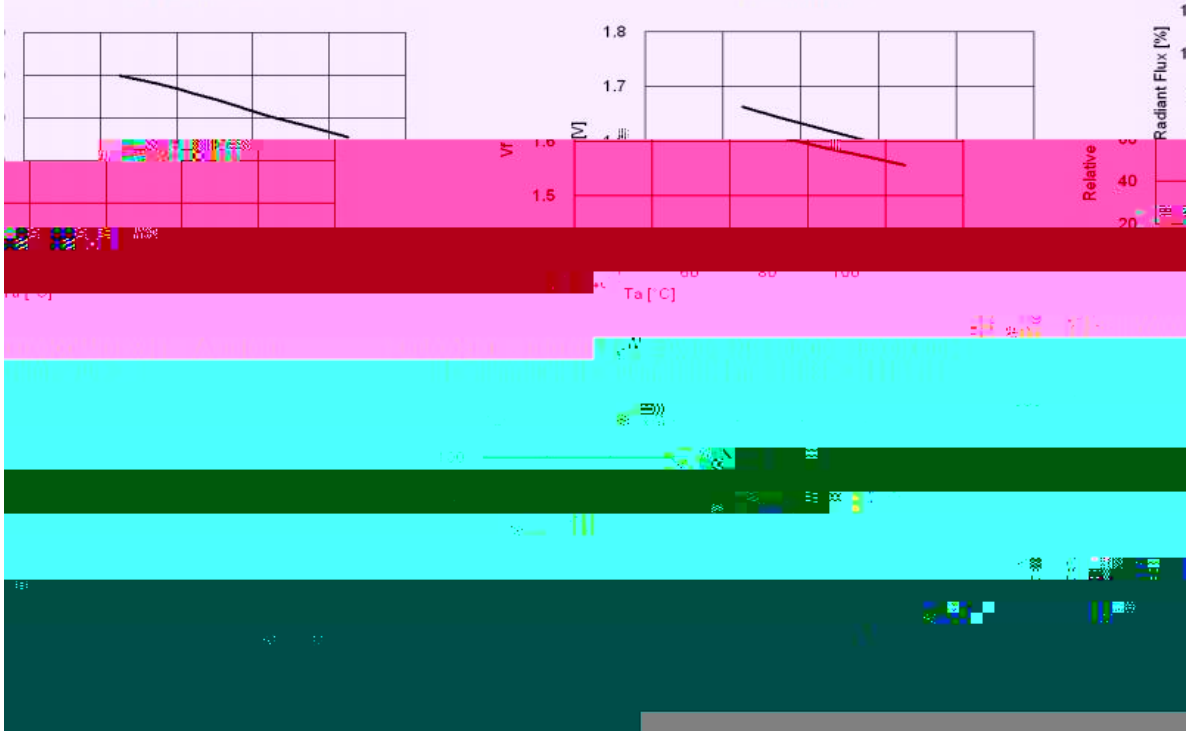

LED (50mA) Intensity distribution curve (50mA test)

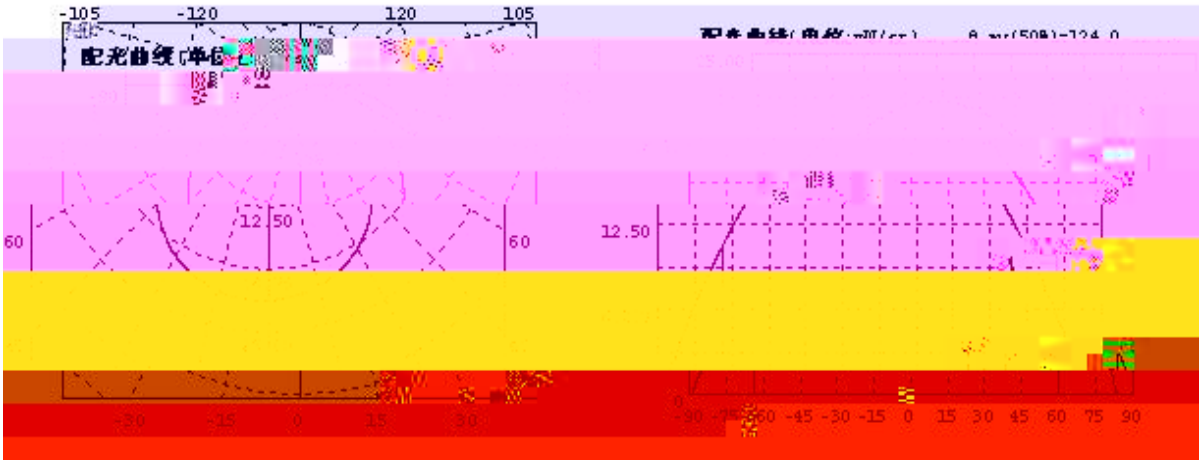

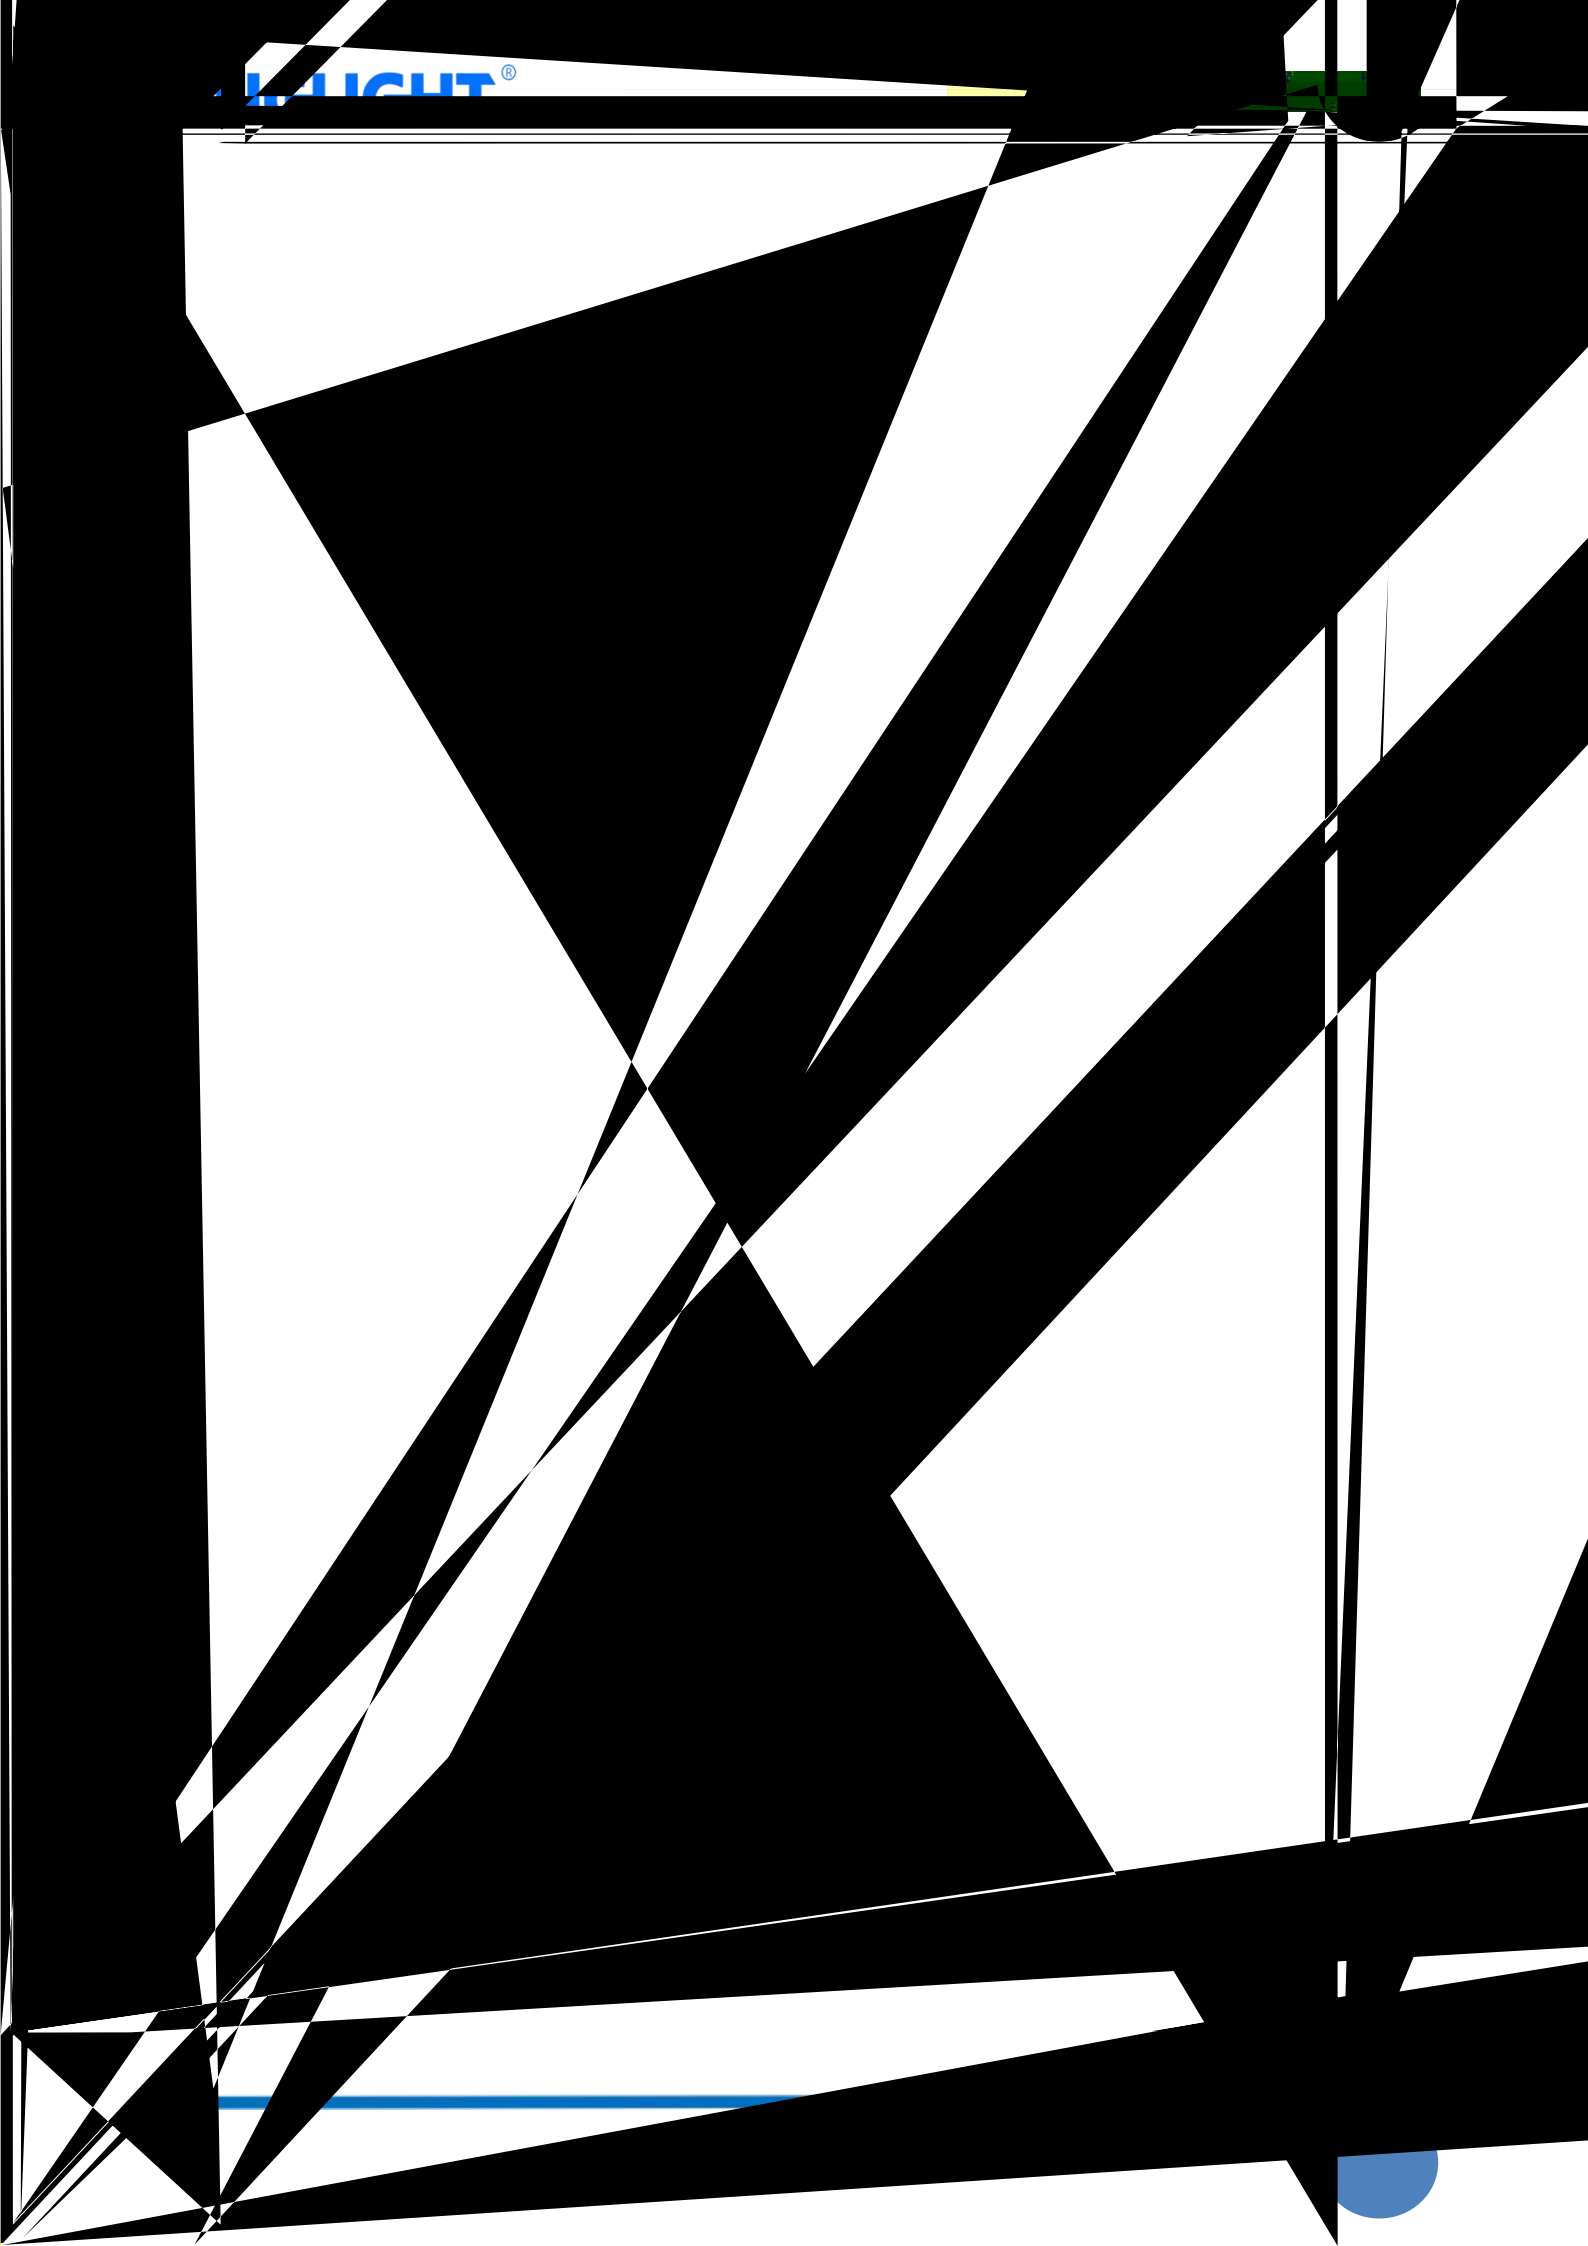

XINGLIGHT®

焊接指导（1）

Guideline for Solder

1. 使用烙铁人手焊接

Hand Soldering

1 E@J PÀ E A3P0 W

300 3

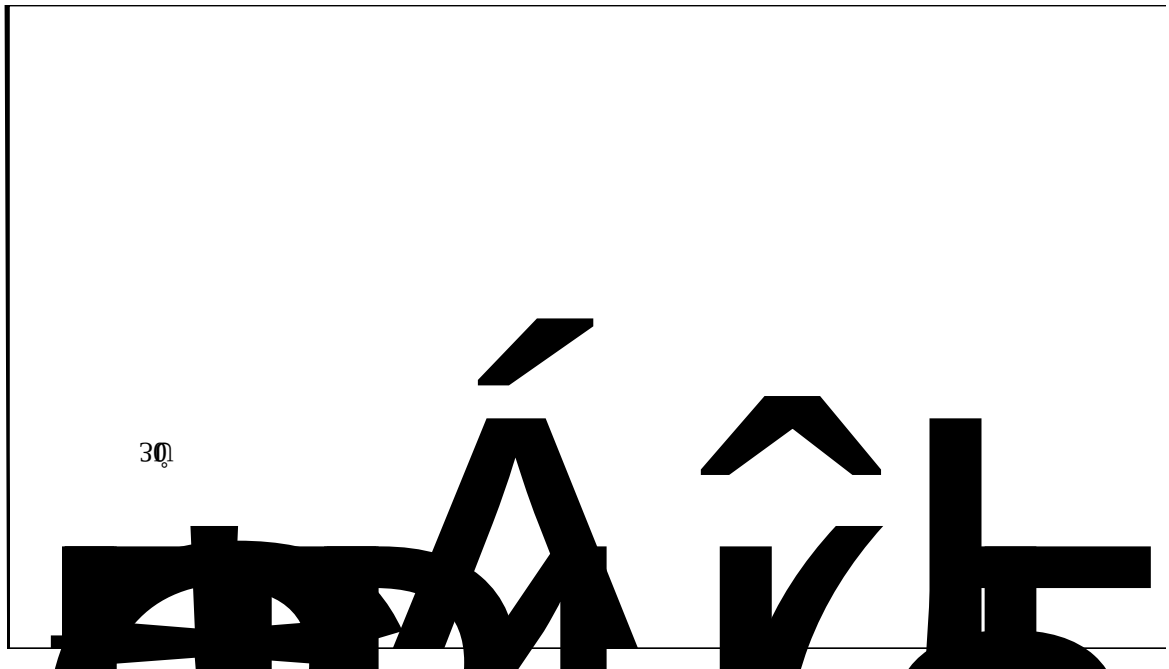

使用注意事项（1）

Precautions (1)

1. 贮存：

Storage

.

Moisture proof and anti-ele

minimum.

.

Before opening the packag

used within 5 years.

.

After opening the package, th

3

dit

3

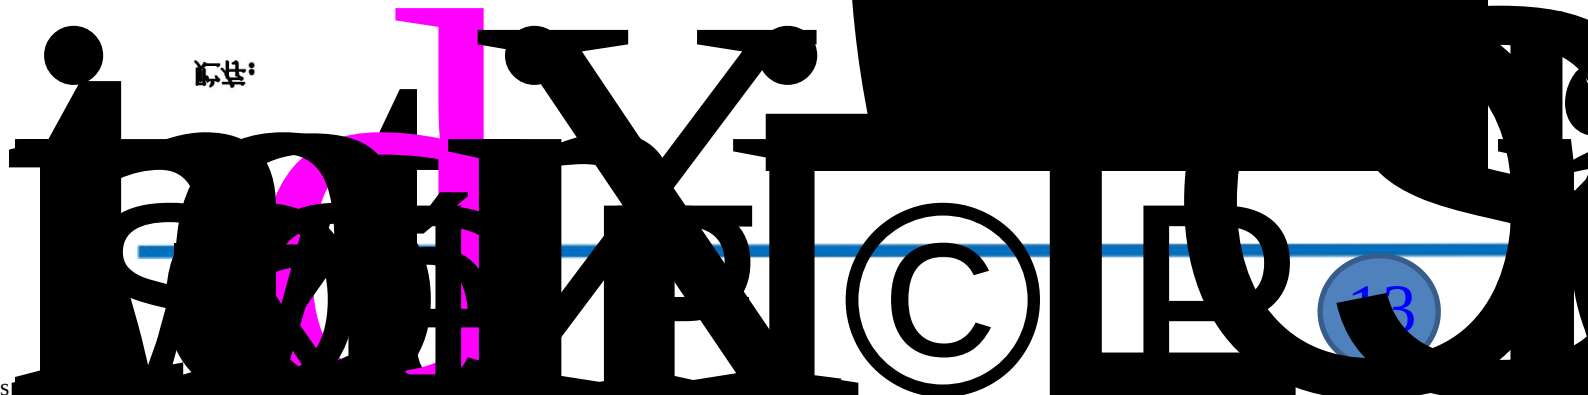

使用注意事项（2）

Precautions (2)
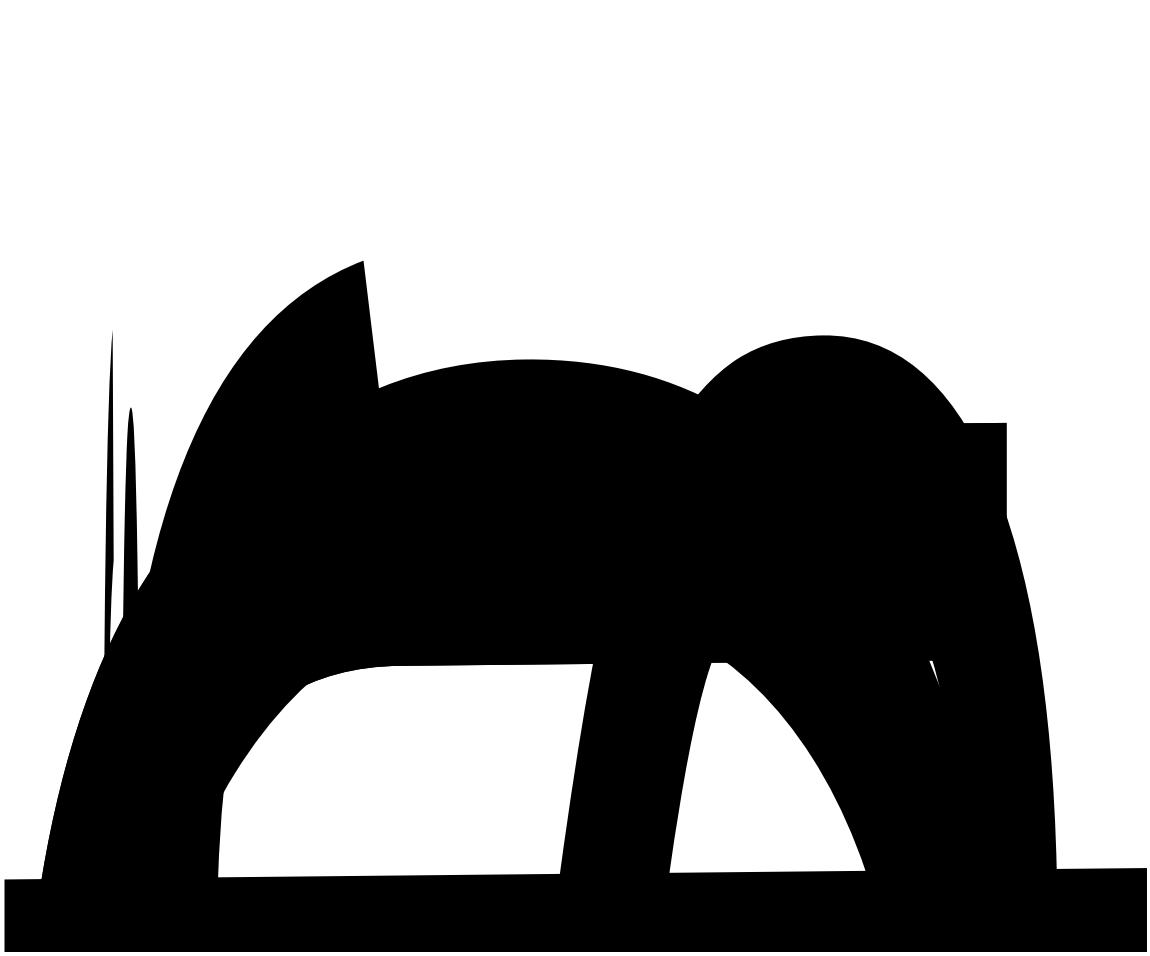
3.