

目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指导


使用注意事项

o n d
#

Đ • ŋ Ъ @





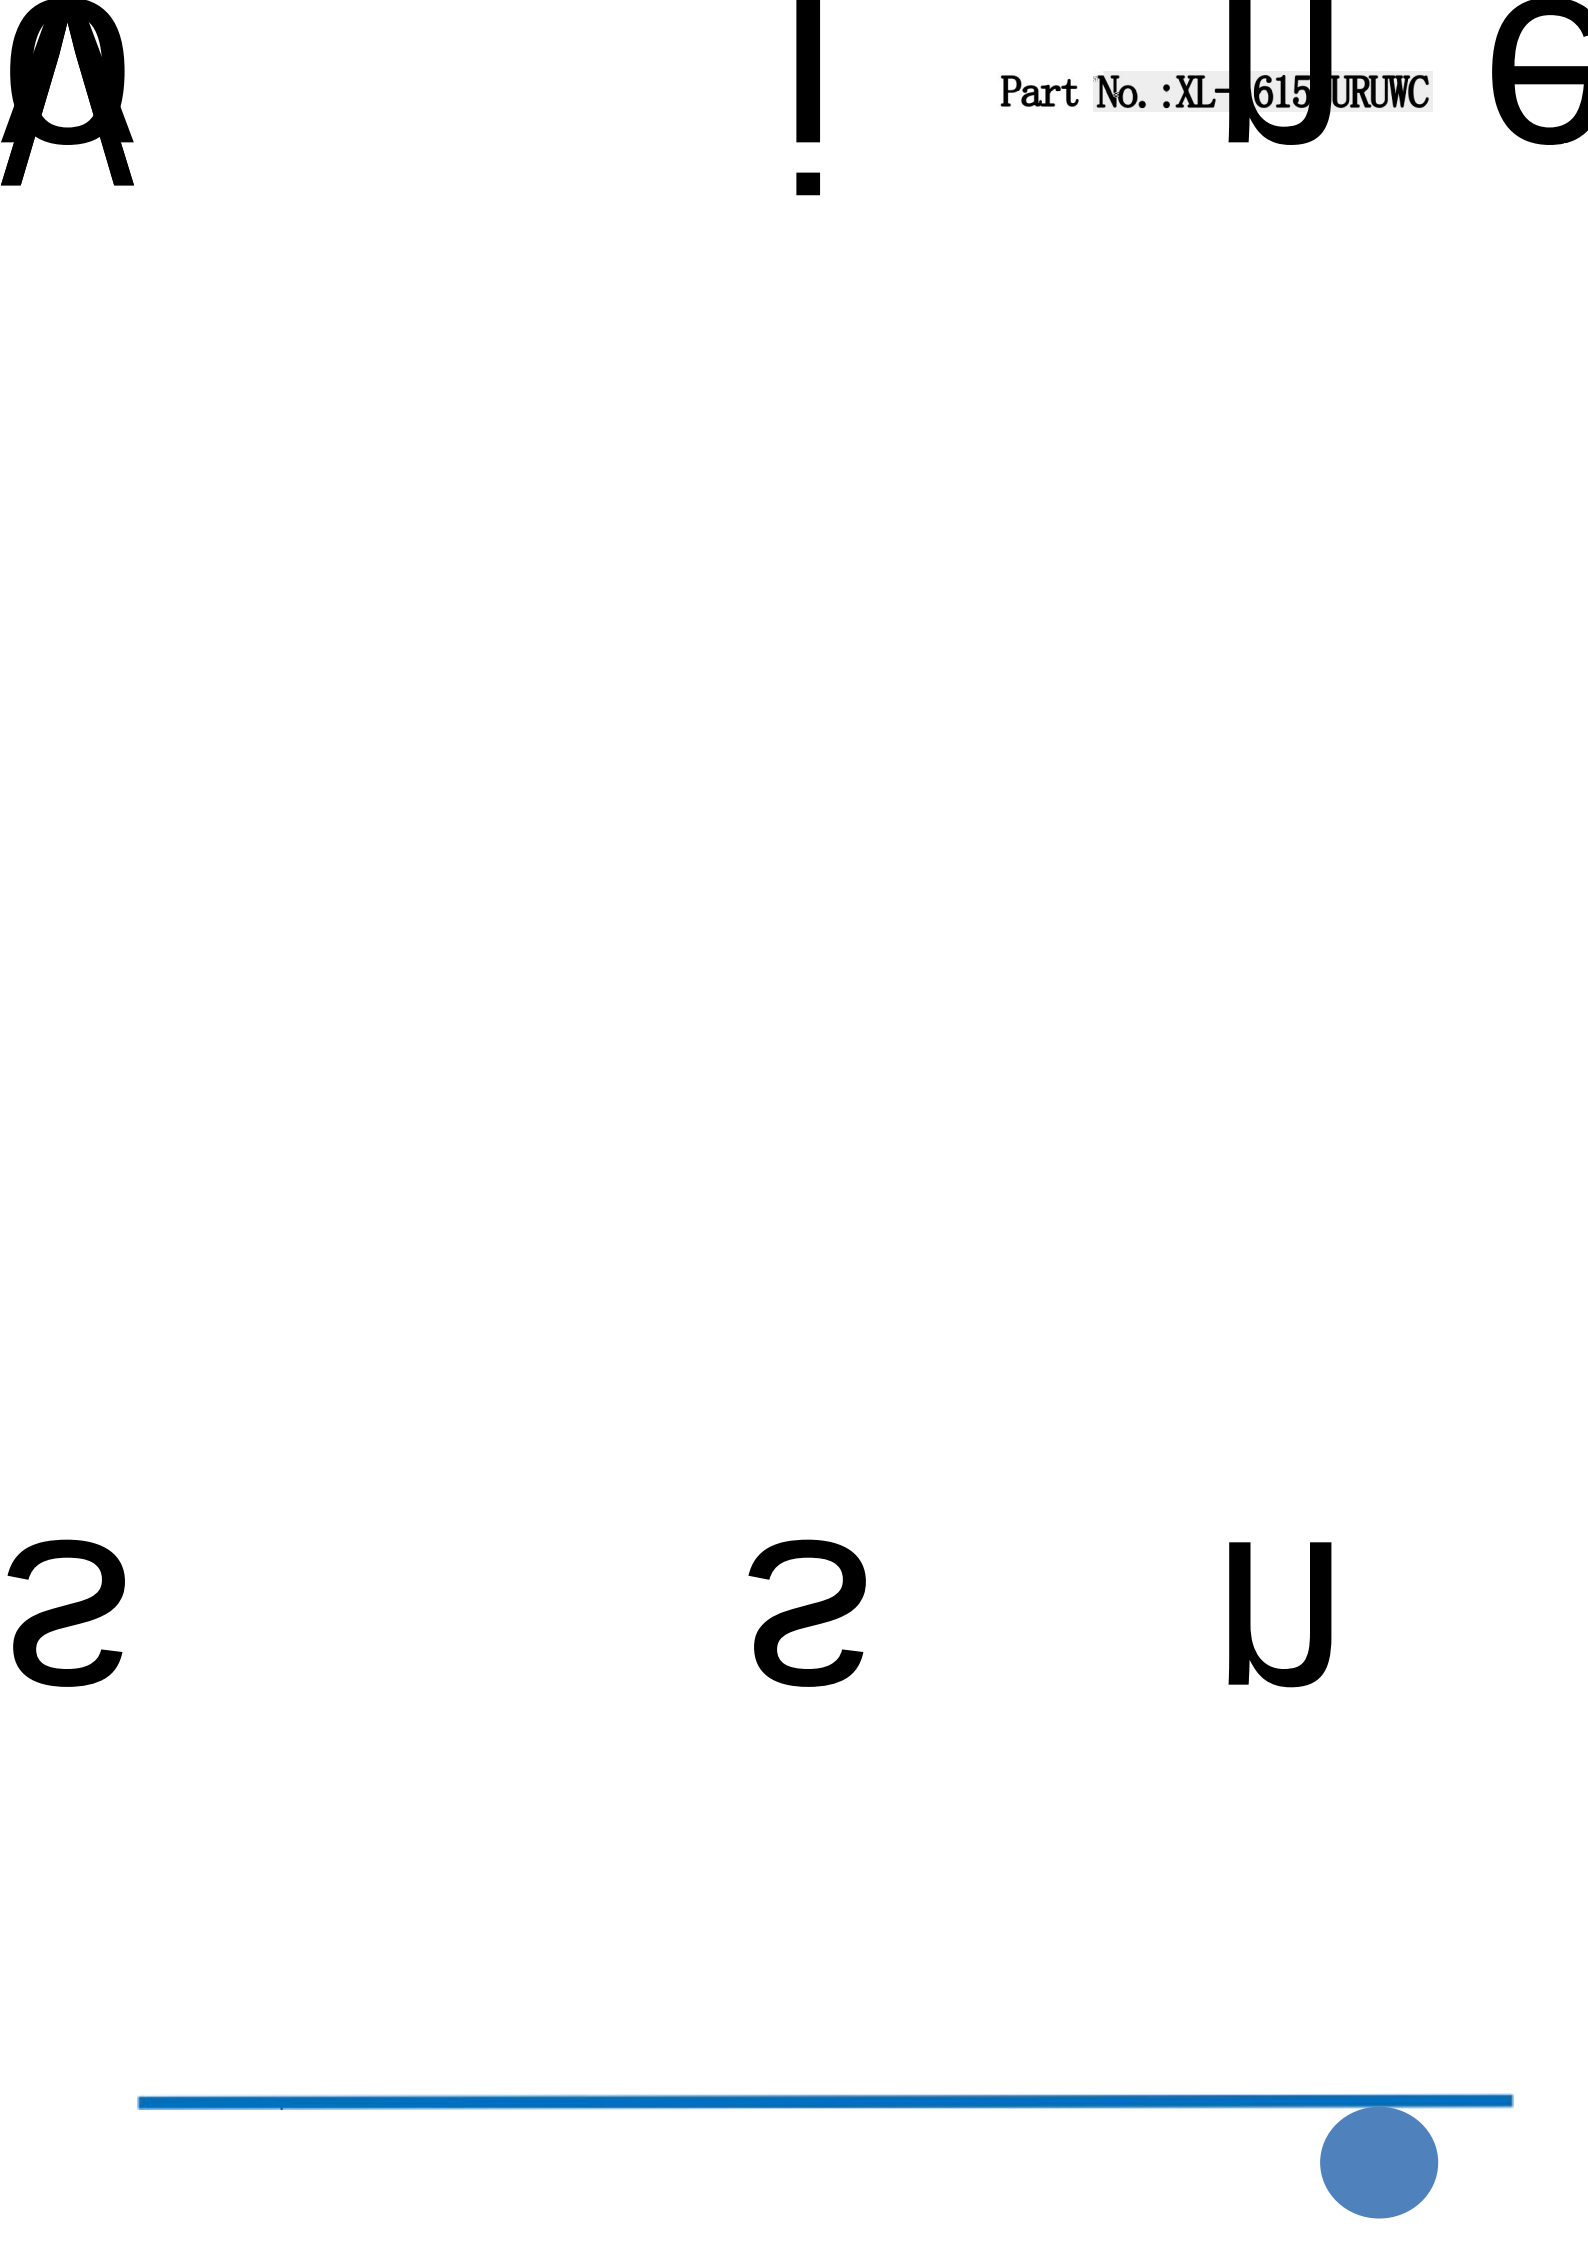

Part No. :XL-615 URUWC

2

2

U



Packaging (1)

The diagram illustrates a 2D Cartesian coordinate system for a soccer field. The field is represented by a large rectangle with a width of 100m and a height of 100m. The field is divided into three horizontal sections: a top section (1.55m high), a middle section (1.75m high), and a bottom section (1.55m high). The total width is 100m. The diagram includes a grid of points, a scale bar, and a north arrow.

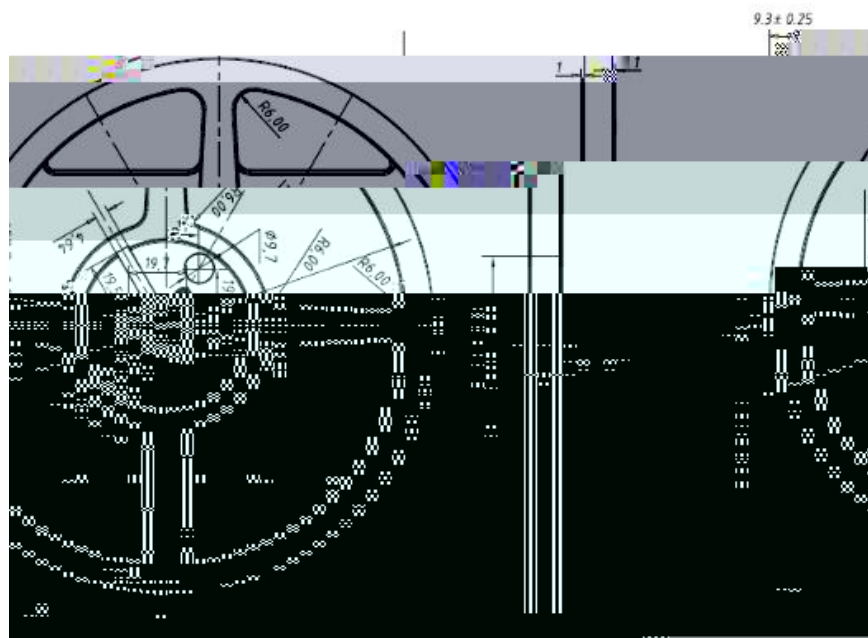


圖 紙及載帶卷出方向及空穴規格 Disk and carrier belt direction of roll





Guideline for Cleaning

30

30

3

50

LED

300W

LED

LED

It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30 for 3 minutes or 50 for 30 seconds. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not.

Ultrasonic cleaning is also an effective way for cleaning. But the influence of Ultrasonic cleaning on LED depends on factors such as ultrasonic power. Generally, the ultrasonic power should not be higher






使用注意事項 (3)

Precautions (3)



r

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



LED

III2W J

6970

979

ED 11

μ6

I