



目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指导

使用注意事项











standard	project	Test conditions	Failure criteria
1	$C\ddot{U}_0X\dot{\downarrow}o\acute{S}\Phi\ddot{U}P\acute{U}\dot{\downarrow}^{\circ}\S^{\textcolor{teal}{3}}C$	$L_c\quad\Psi!$	$\S\{\textcolor{teal}{[}$
	$[Q^{\circ}T\acute{U}\Omega\acute{U}\S\Omega\sigma\acute{U}\acute{b}\textcolor{teal}{L}^3$	$L_c\quad\Psi!$	$[\{ [$
	$w\S\Phi\S\sigma\sigma\S\acute{O}\check{H}\sigma\sigma\S\Omega\acute{U}\textcolor{teal}{L}_w$	$\textcolor{teal}{3}_w\quad^3$	$\S\{\textcolor{teal}{[}$
2			

4" R 00" JEON




包装 (2)

Packaging (2)

◇ 防潮防静电包装 Moisture Proof and Anti-Static Foil Bag



◇ 外包装箱 Cardboard Box

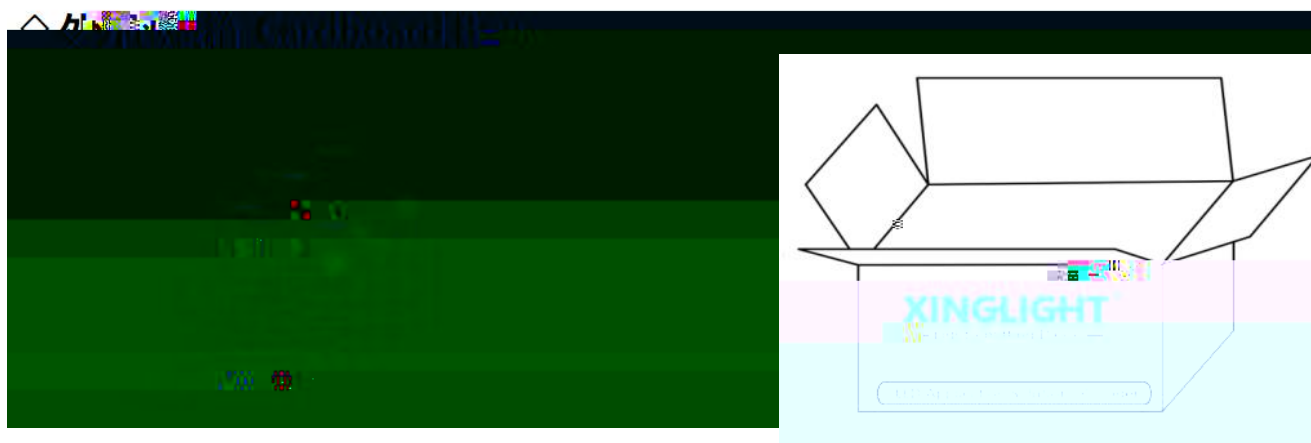

◇ 标签说明 Label Explanation









使用注意事項（2）

Precautions (2)

設計建議

LED



