XINGLIGHT®

Photo Relay

XLM4401

Ratings and Characteristics Curves (@ T_A = 25°C unless otherwise specified)

Fig.7 LED dropout voltage vs. Ambient temperature characteristics

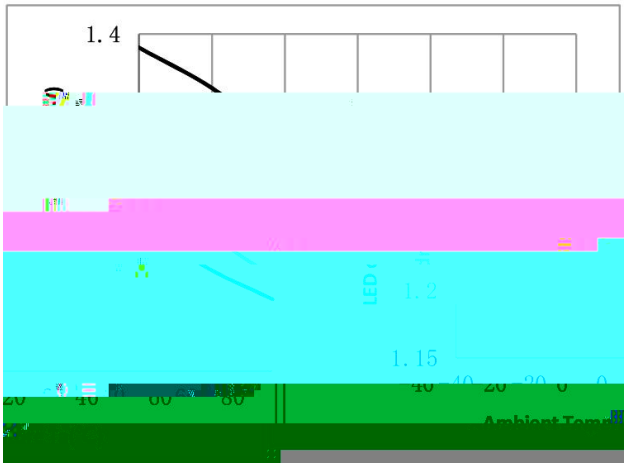

Fig.8 Output current vs Output voltage

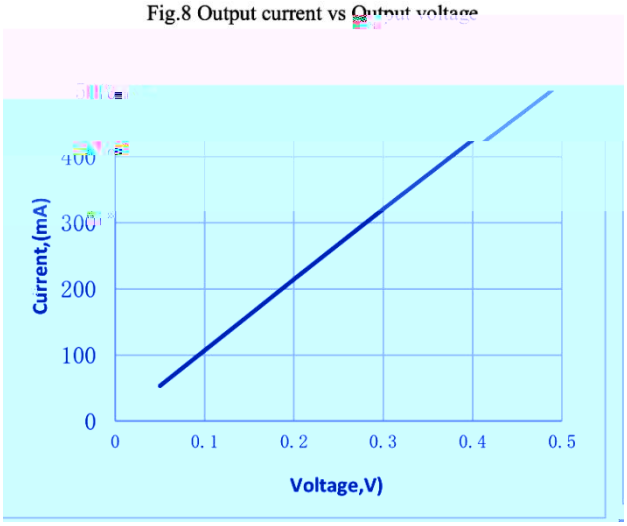

Fig.9 Off state leakage current vs Load voltage characteristics

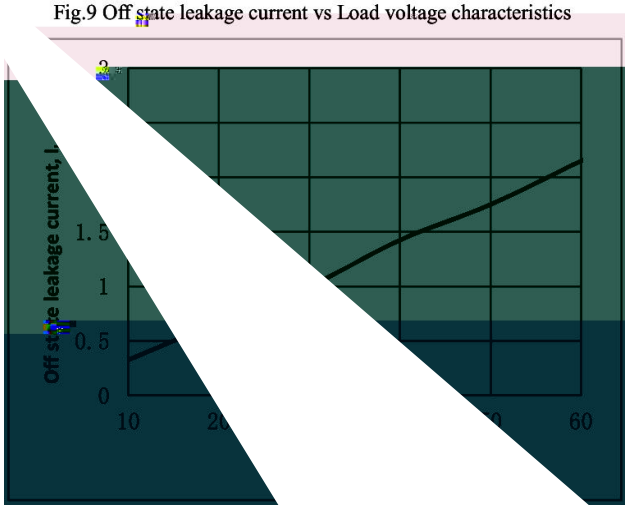

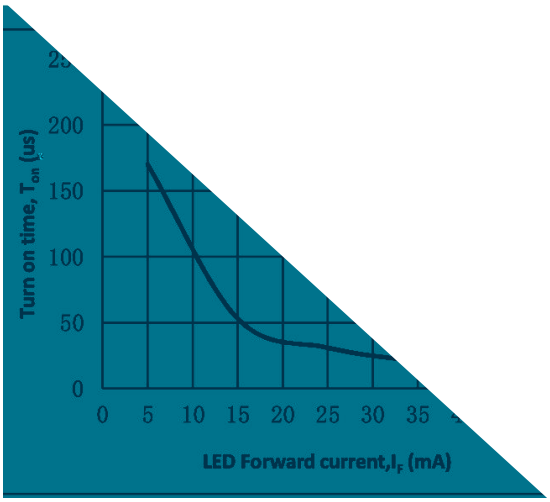

Fig.11 LED turn off time vs Forw

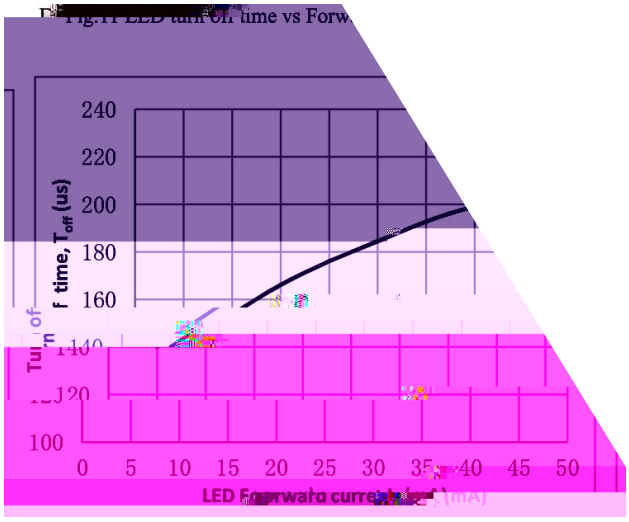

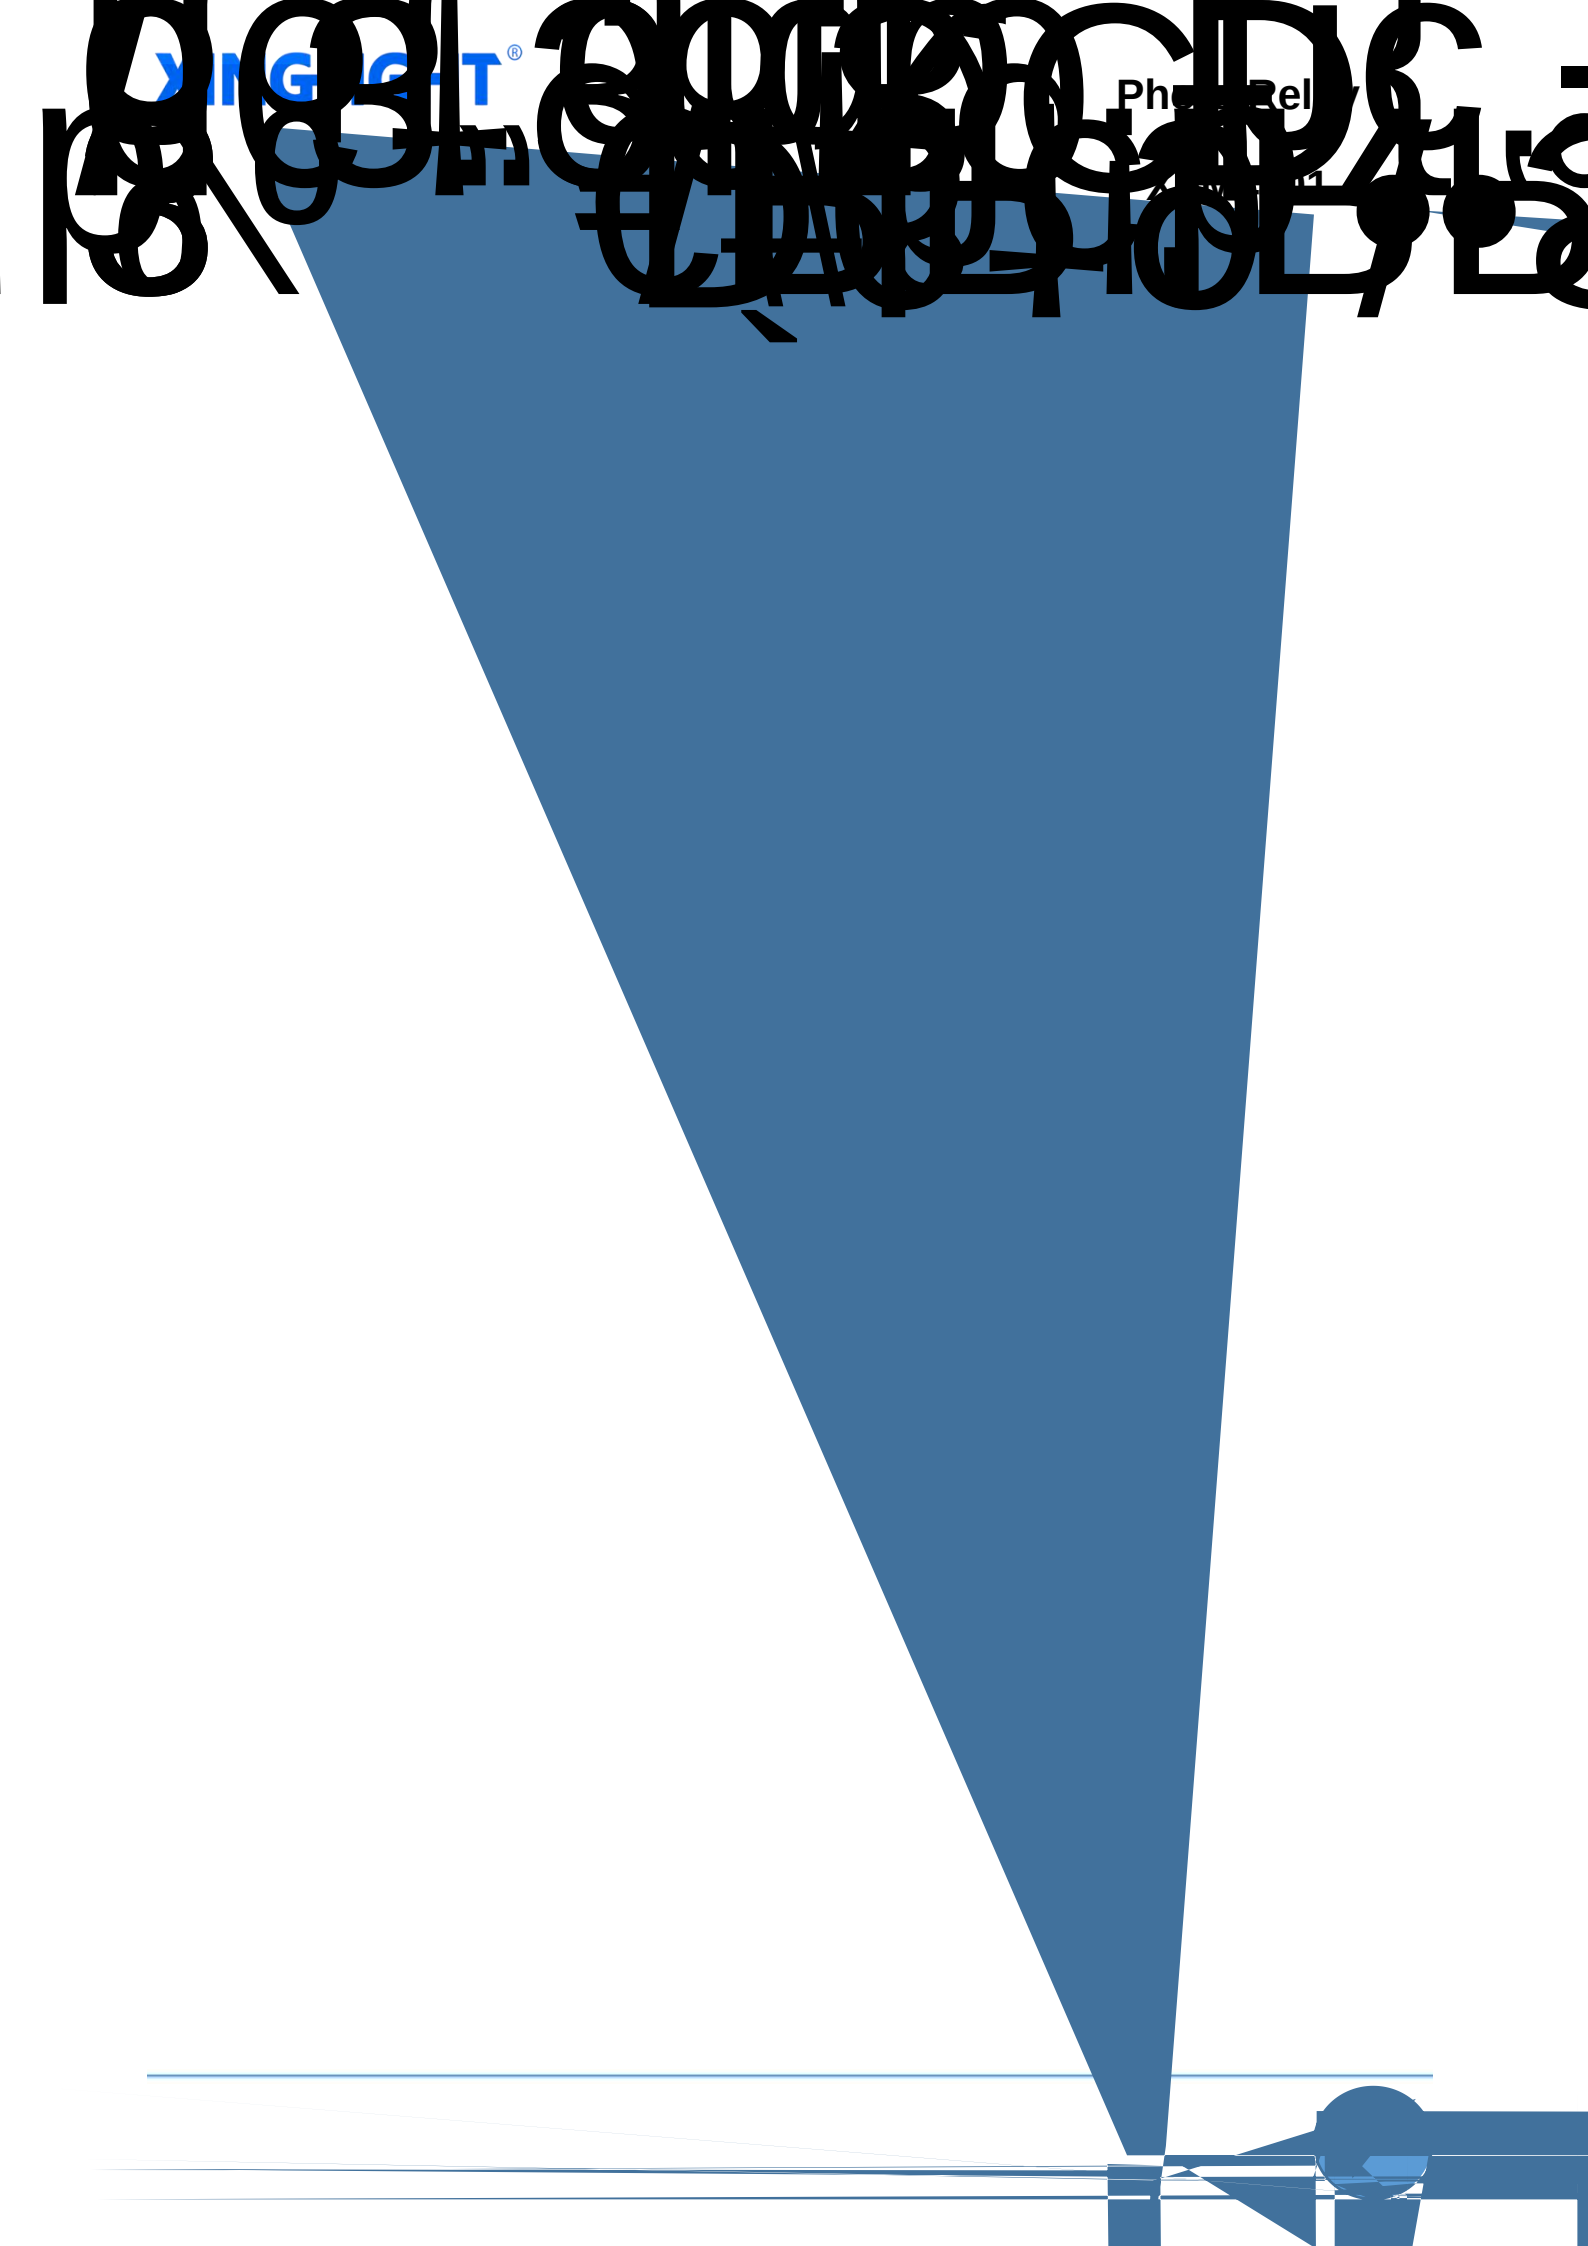

Reflow soldering

	Symbol	Min	Max	Unit
Preheat temperayure	Ts	150	200	
Preheat time	ts	60	120	