Product packaging logic diagram

Features

Sv "• PP€)YF 0

High speed optocoupler

XLH11LX

High speed optocoupler

XLH11LX

XINGLIGHT®

High speed optocoupler

XLH11LX

XLH11LX

High speed optocoupler

XLH11LX

Package Outline Dimensions (unit: mm)

DIP6

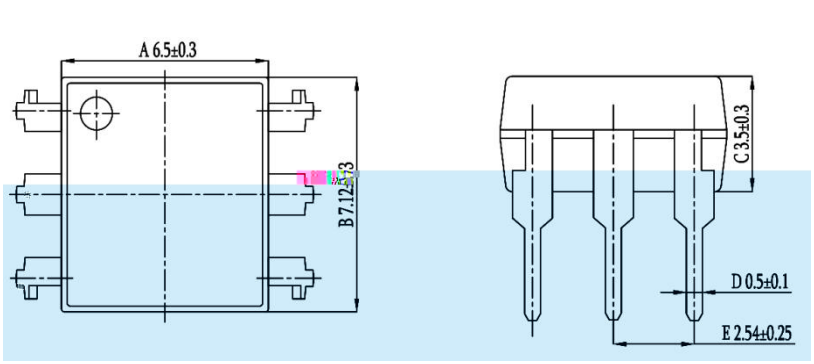

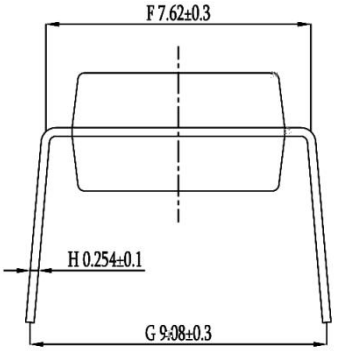

SMD6

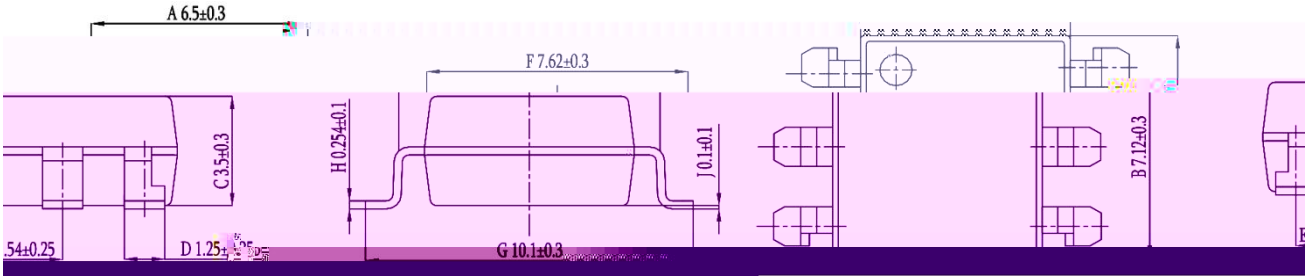

SOLDERING FOOTPRINT (unit: mm)

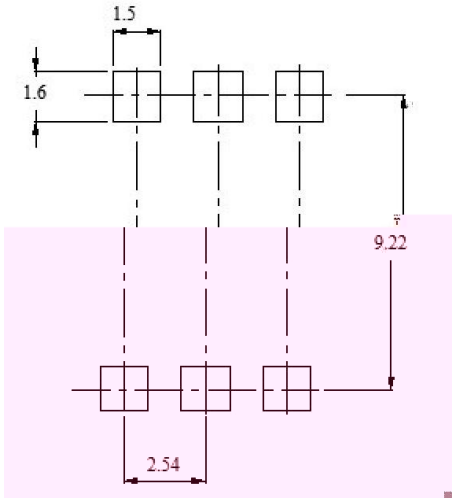

Reflow soldering

	Symbol	Min	Max	Unit

Wave soldering

Profile feature

Packing

Package Type	Packing Form	Quantity per Tube &Reel	Quantity per Box	Quantity per Carton	Antistatic Bag Specification	Box Specification	Carton Specification	Note
DIP6	Tube(500mm)	65pcs/tube	50 tubes /box	10 boxes /ctn	190*670mm	520*105*50mm	545*372*235mm	Straight insert type material tube
SMD6	Reel(ϕ330mm)	1000 pcs/reel	2 reels /box	10 boxes /ctn	380*420mm	350*340*60mm	365*330*370mm	Guard band 200mm /min.

■ Summary table

■ DIP6 (Tube)

■ SMD6 Reel

Attention