







Fig.1 LED Positive voltage vs Positive current

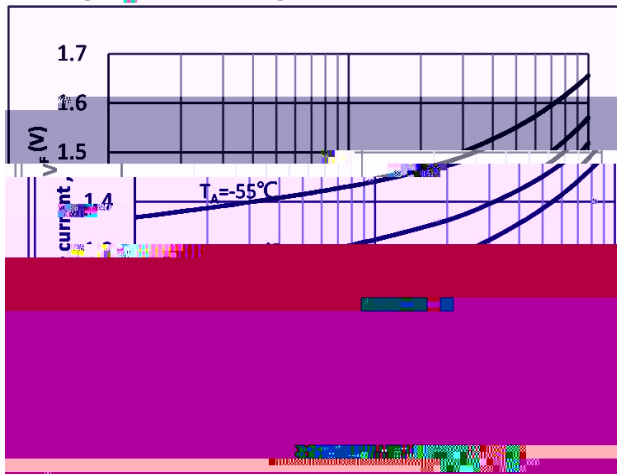


Fig.2 On-state characteristic

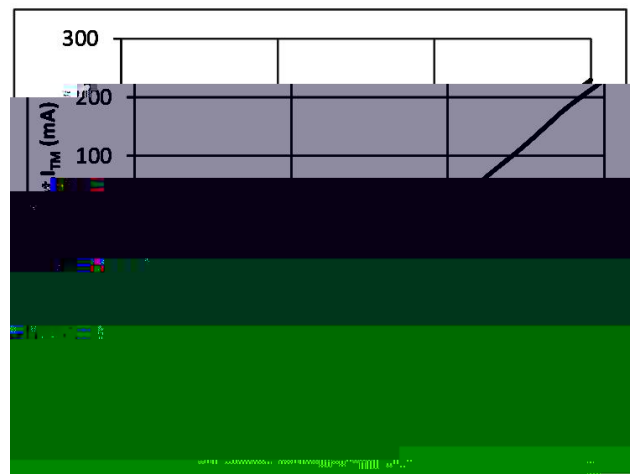


Fig.3 Trigger current vs Ambient temperature

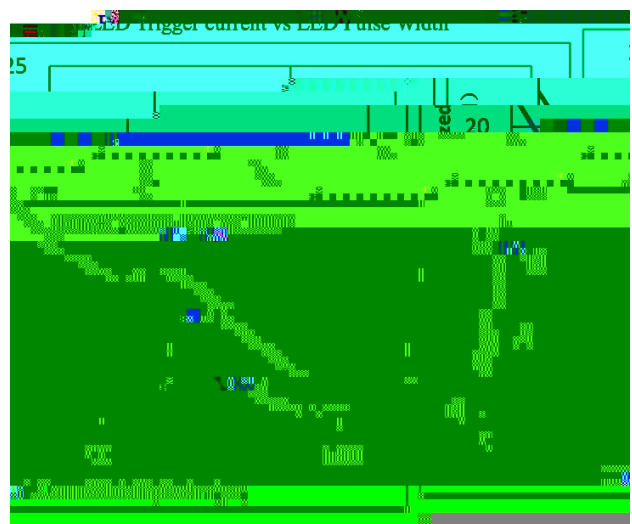
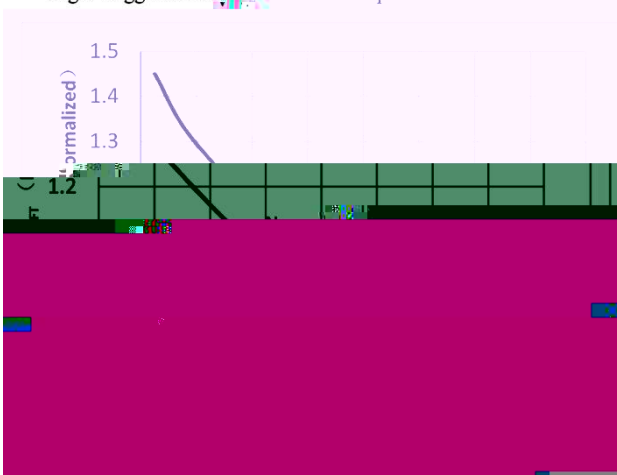


Fig.5 Holding current vs Temperature



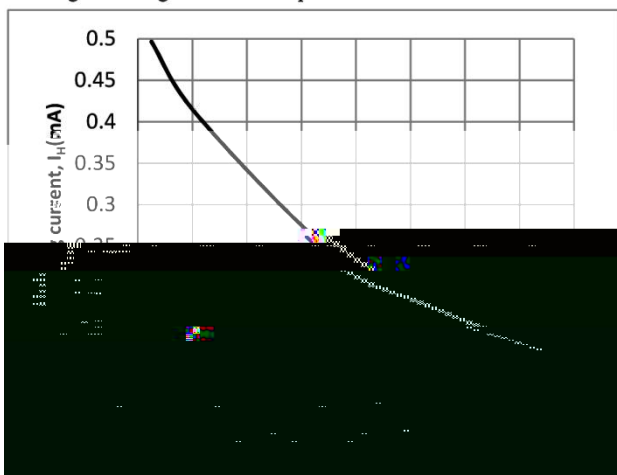


Fig.6 Leakage current vs Temperature

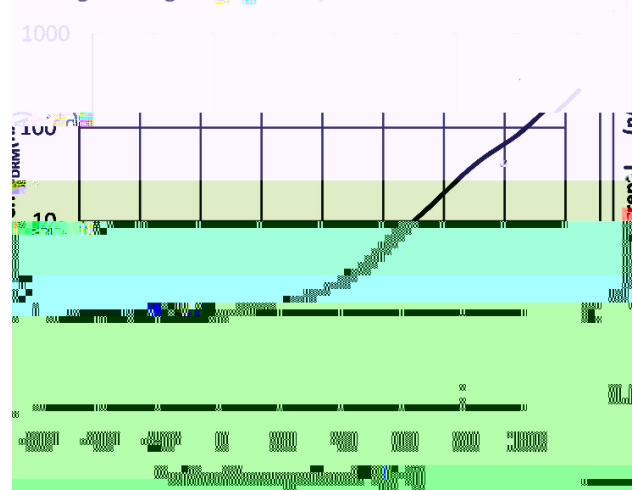

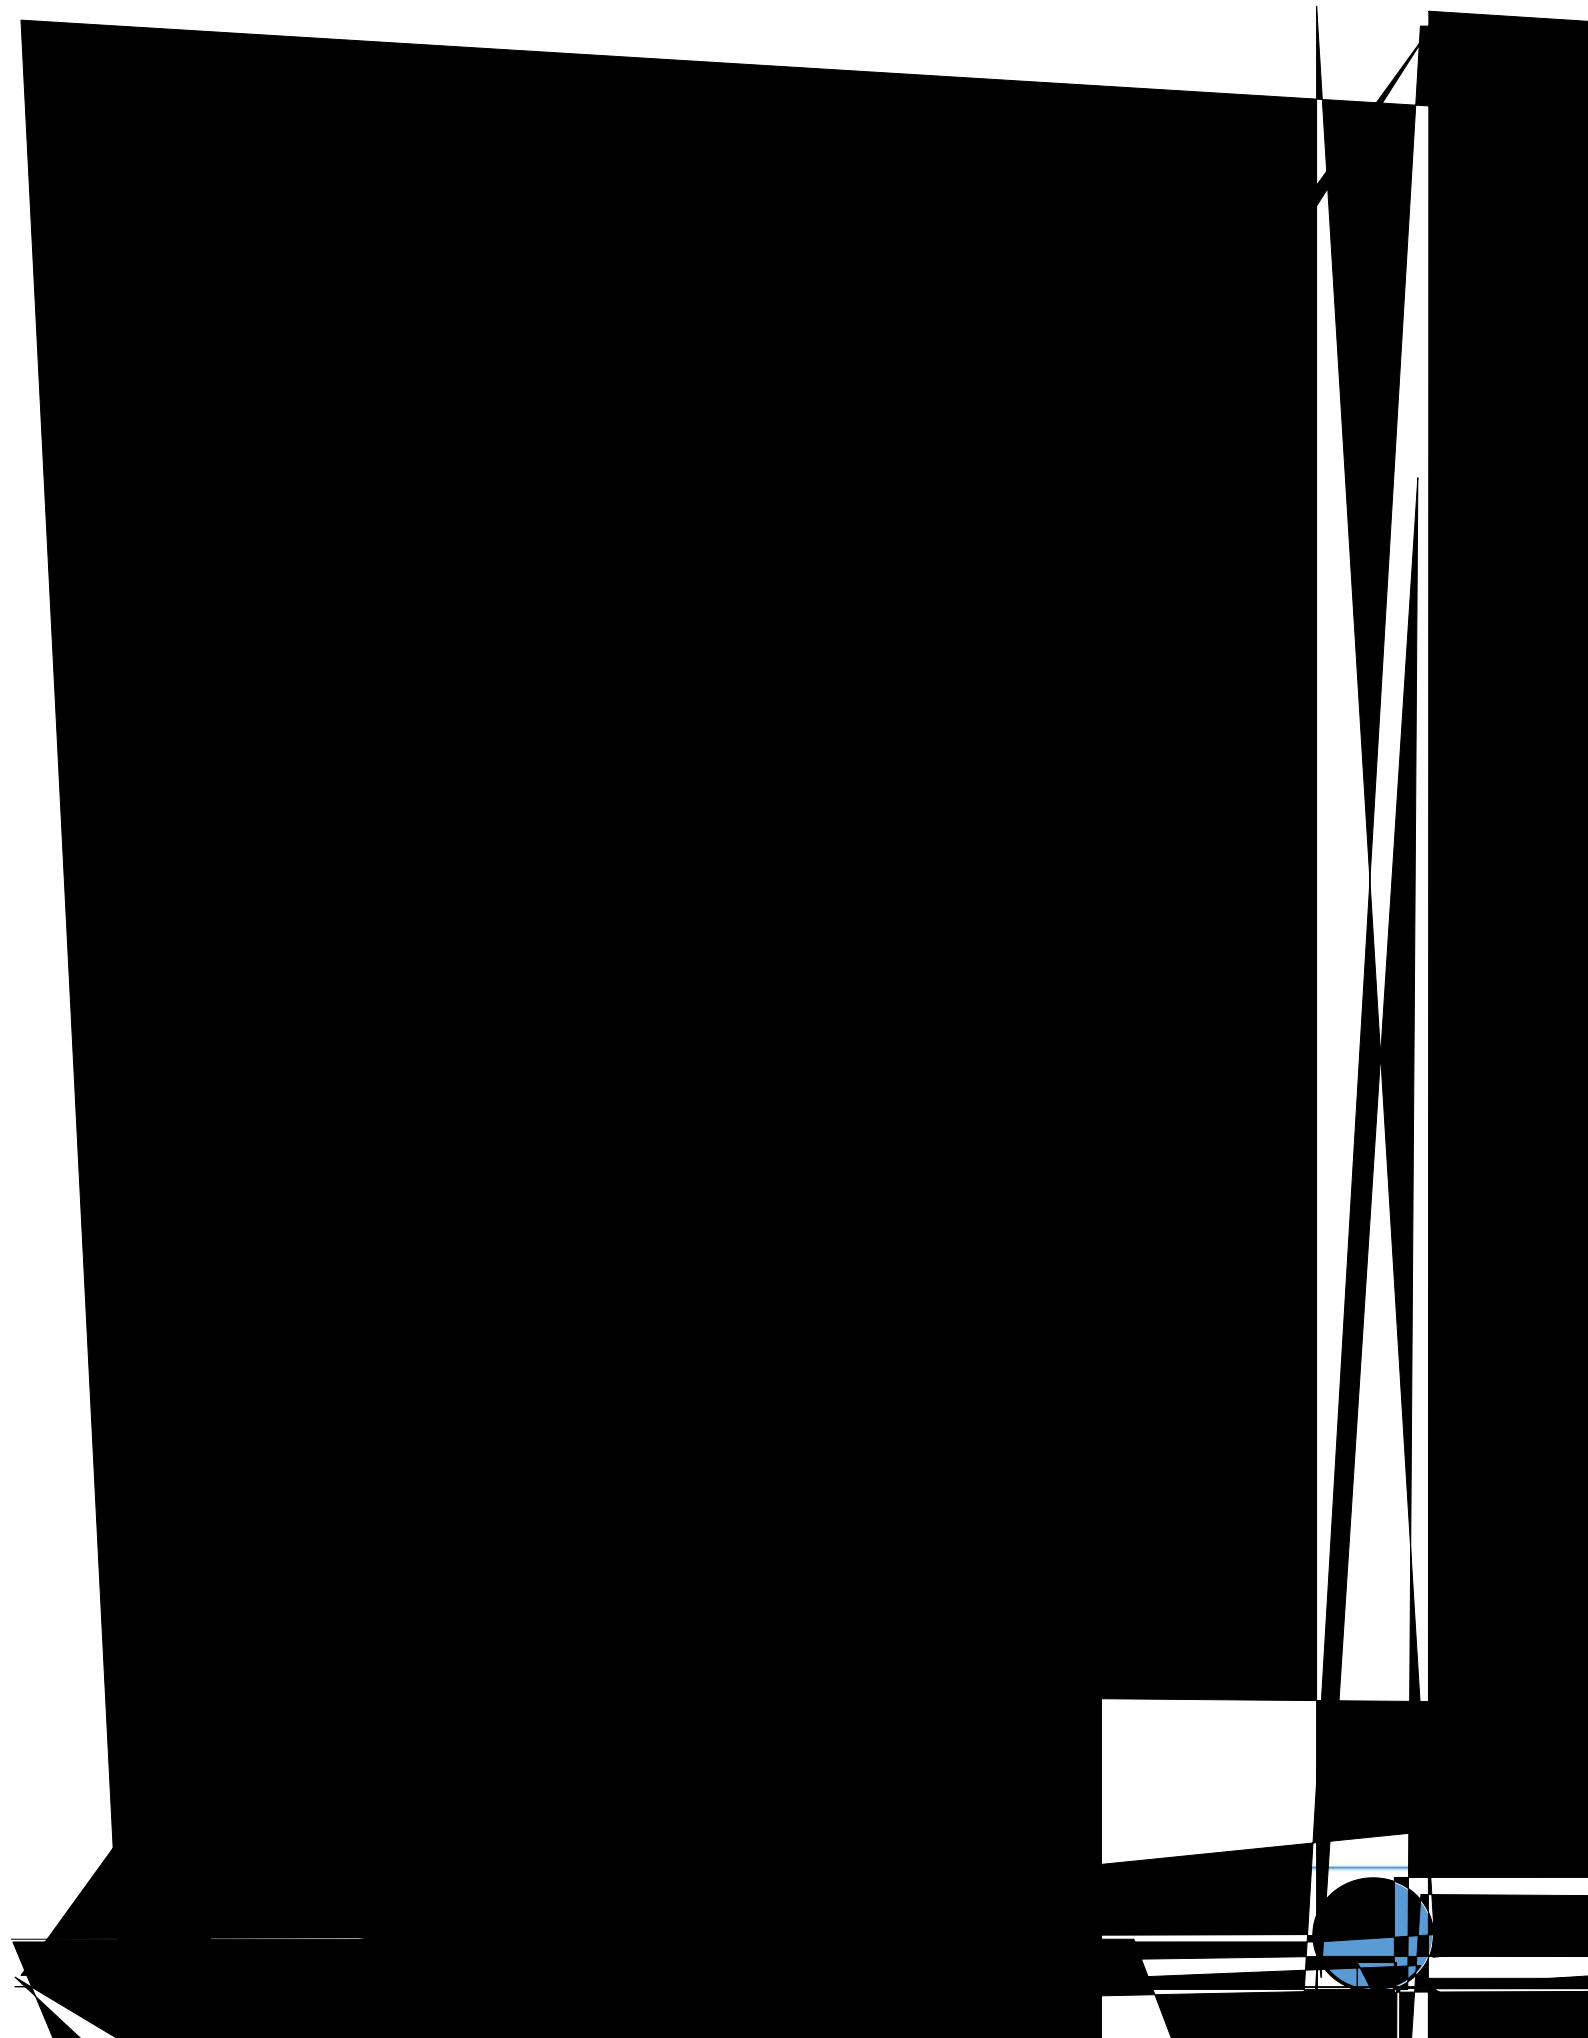

Preheat temperayure	Ts	150	200	
Preheat time	ts	60	120	s
Ramp-up ratea(T _L to T _P)			3	/s
Liquidus temperature	T _L	217		
Time above T _L	t _L	60	150	s
Peak temperature	T _p		260	
Time during which T _c is between (T _P -5) and T _P	t _p		30	s
Ramp-down rate(T _P to T _L)			6	/s

Average ramp-up rate	200 °C/s
Heating rate during preheat	1 °C/s to 2 °C/s typical; 4 °C/s maximum
Final preheat temperature T _s	130 °C
Preheat time (25 °C to T _s)	60 s
Peak temperature T _p	260 °C
Time within peak temperature t _p	10 s
Ramp-down rate	5 °C/s maximum

