技术数据表

2720 正白 0.5W 车用 贴片式发光二极管

特点（C ）：

L/W/H :2.8*2.1*0.6mm

Appearance dimension (L / w / h): 2.8*2.1*0.6mm

: /

Luminous color and colloid: Wh

应用领域（P ）

典型特性曲线

Typical Characteristics Curves

光谱分布曲线
Relative Spectral Distrbution

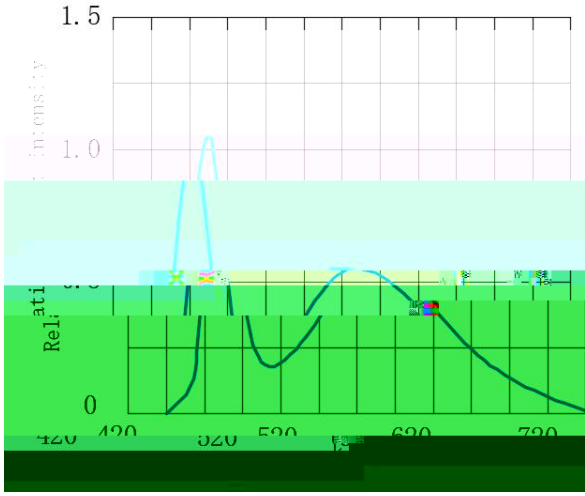

伏安特性
Volt ampere characteristic

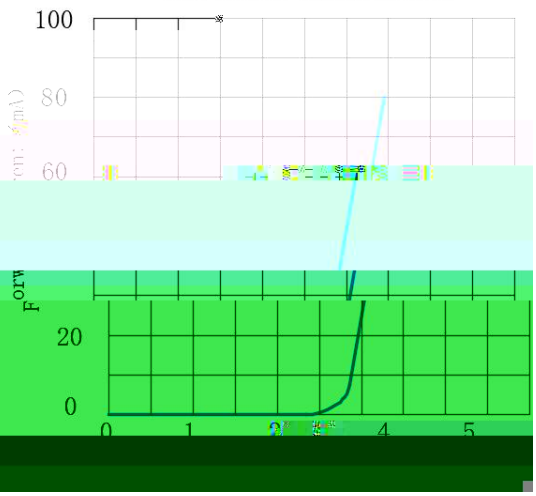

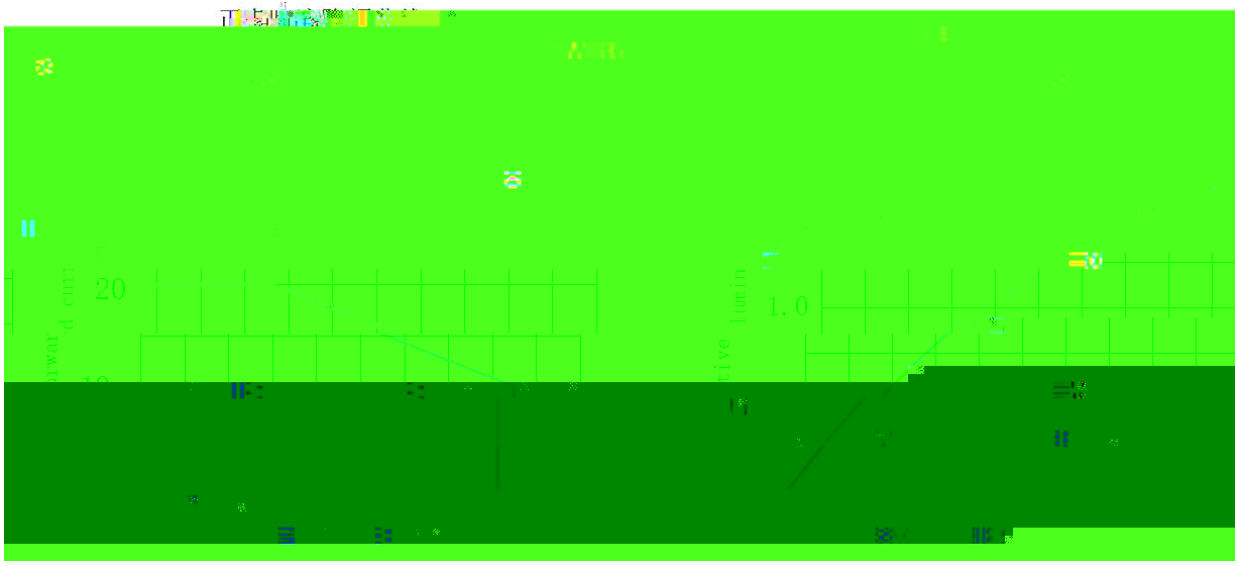

相对辐射强度与空间

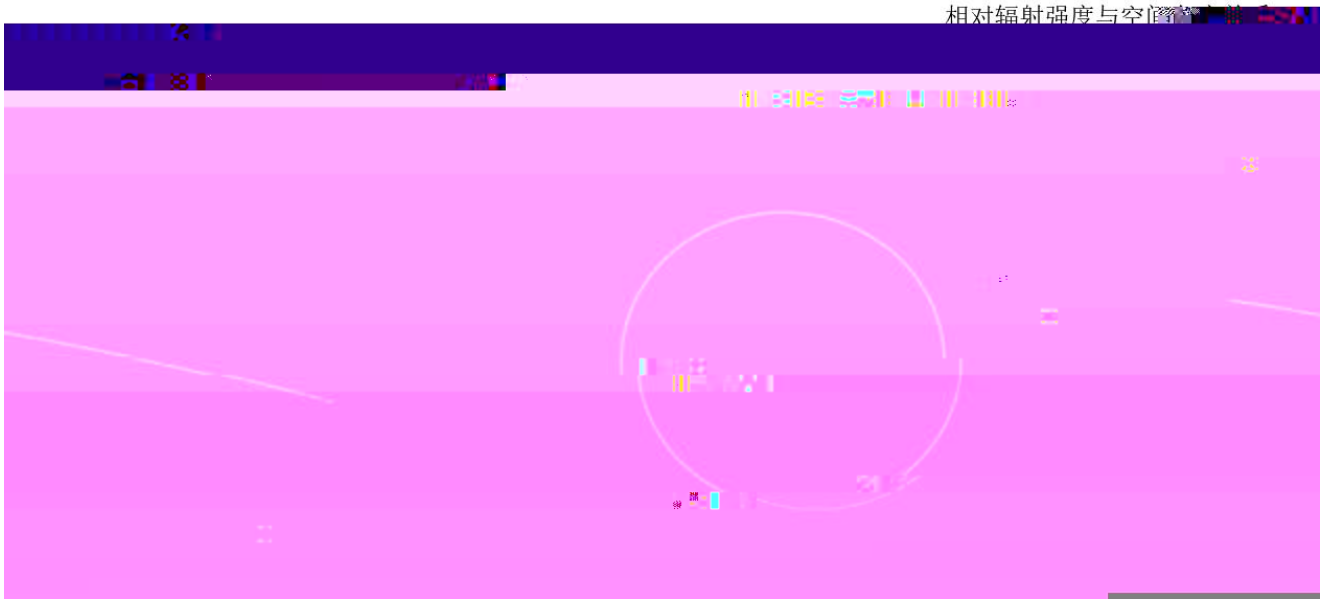

25 5 /Note If not otherwise indicated the test environment temp erature is 25 5

焊接指导（2）

Guideline for Soldering (2)

30 3 50

30

LED

300W LED

LED

It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30 for 3 minutes or 50 for 30 seconds. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not.

Ultrasonic cleaning is also an effective way for cleaning. But the influence of Ultrasonic cleaning on LED depends on factors such as ultrasonic power. Generally, the ultrasonic power should not be higher than 300W. Before cleaning, a pre test should be done to confirm whether there will be damage to the LED after cleaning.