技术数据表

2720 正白 0.5W 车用 贴片式发光二极管

特点（C ）：

* ^ L/W/H˜ :2.8*2.1*0.6mm

Appearance dimension (L/W/H): 2.8*2.1*0.6mm

* ü ÓaY,-ÝÞÕ×1P N¯ /

Luminous color and colloid: Wh

应用领域（P ）：

典型特性曲线

Typical Characteristics Curves

光谱分布曲线
Relative Spectral Distrbution

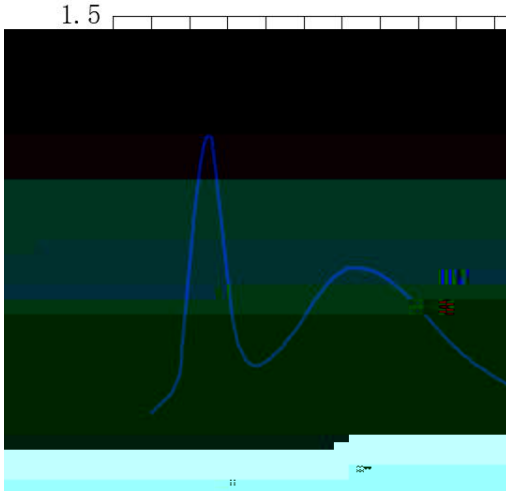

伏安特性
Volt ampere characteristic

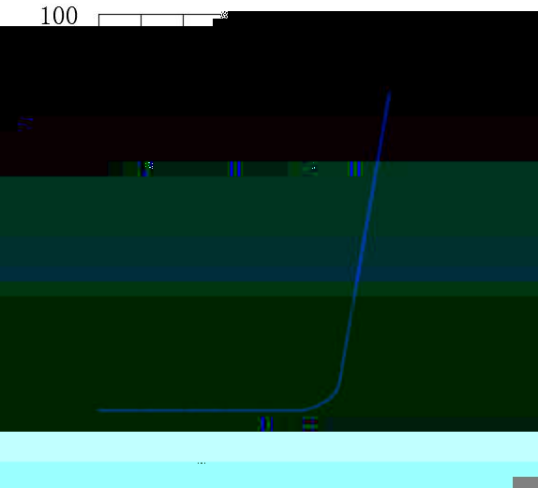

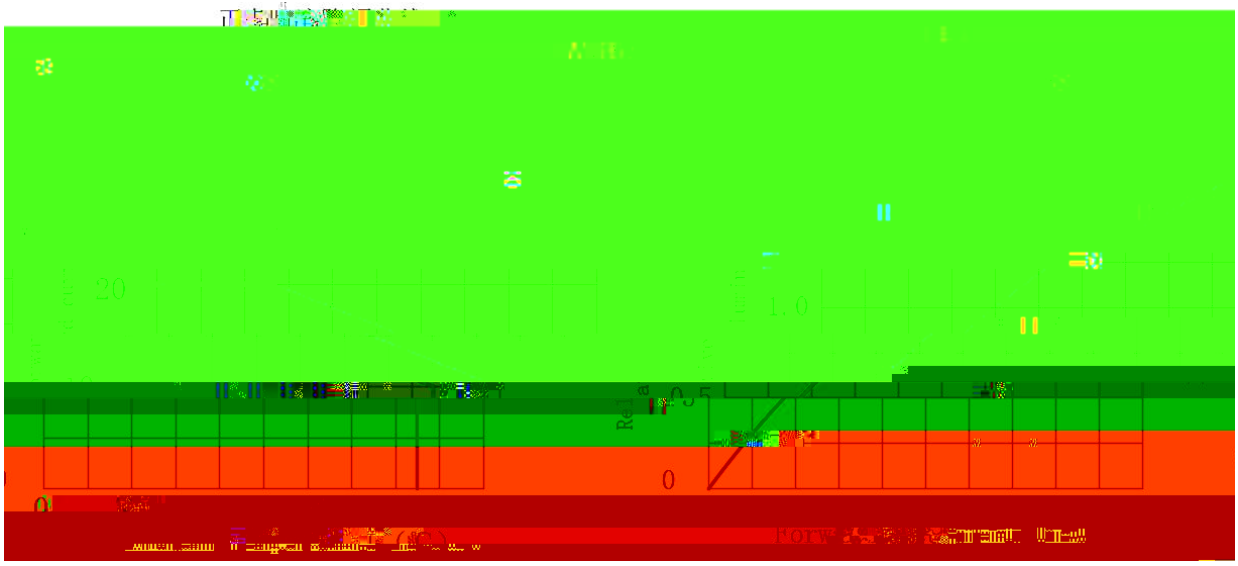

相对辐射强度与空间

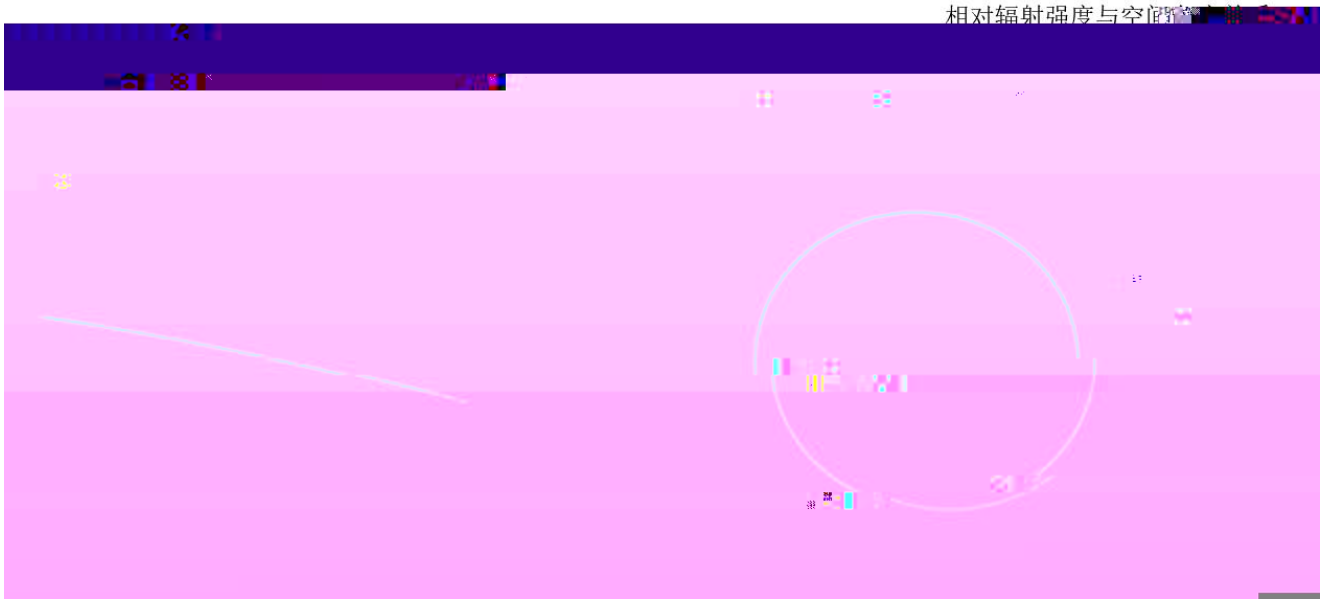

ч 25 ¤ 5Ņ/Note' If not otherwise indicated the test environment temp erature is 25 ¤ 5Ņ

C' >(x' „ PUƒèua"gCy €•wŽ,WpbâuG‰Sâ x• ä 7‰.Q"x'8e€7‰ s‡e€7‰S8 — pb8'fgx8•€5ƒ8•€5V3‰&fYF8 — 'Q‡e€5'8e€5'å 5'^A"YFâ UcâuEƒâVfwŽ%feƒèÅR.Q"R#†X V85fgx85fgr8e€7.Q"xŽ…TX>…Tñ ð U Téç¶')4 U Sy>{y 1 U Ar !Ar

焊接指导（2）

Guideline for Soldering (2)

ضي ą ˘ ضي Ь G 30Ņ ð Й 3 № ˘ Ь G ð Й

30 Â

ą Ї ŕ ³ ╕ ╠˘ ѽ ą ╕ Ь Ψ LED ė № ᴴ Â

З ˘ ѿ ѡ Ь 300W˘ ϒ ↕˜ LED ᴴ Â

Ї ᵣ ’ ѽ ð ϒ Ψ LED ᴴ Â

It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30Ņ for 3 minutes or 50Ņ for 30 seconds. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not.

Ultrasonic cleaning is also an effective way for cleaning. But the influence of Ultrasonic cleaning on LED depends on factors such as ultrasonic power. Generally, the ultrasonic power should not be lower than 300W for cleaning time for 1 minutes.