











典型特性曲线

Typical Characteristics Curves

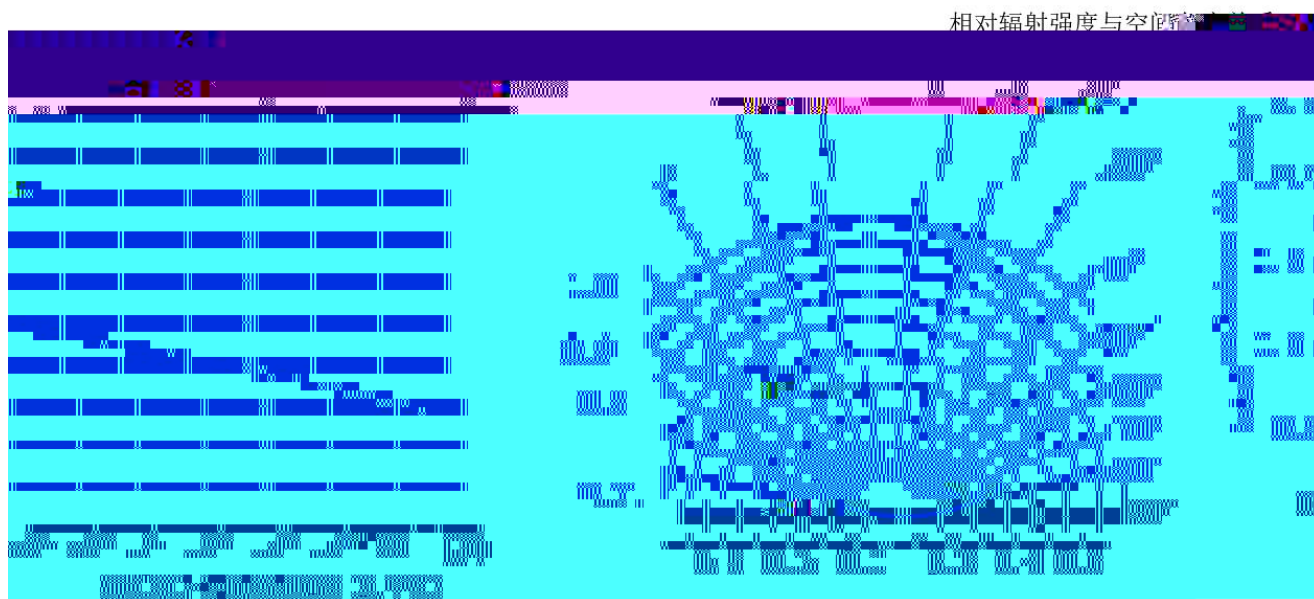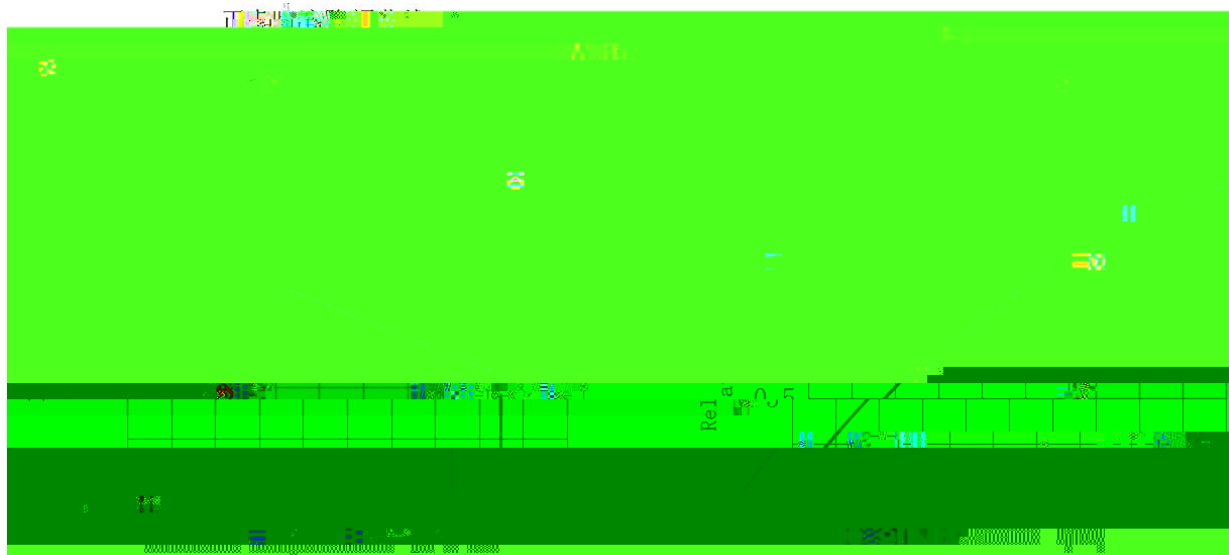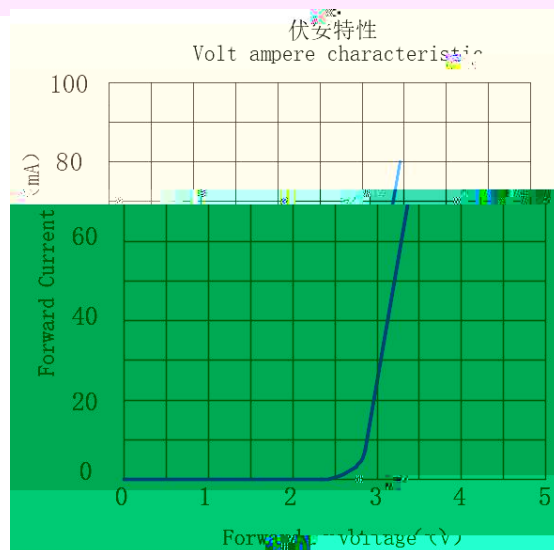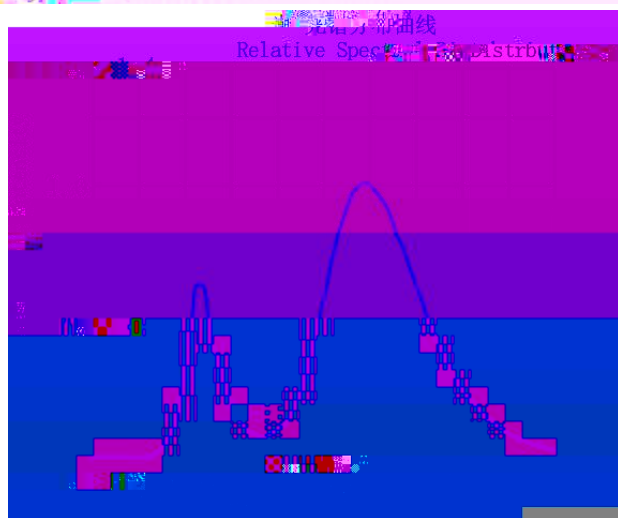

可靠性试验

Reliability Test Items And Conditions

Working life	150mA	Continuous lighting at the maximum rated current at room	1000	1000 hours	MIL-STD-750D:1026	
			-24	+72)	MIL-STD-883D:1005	
			-24hours	+72hours	JIS C 7021:B-1	
Endurance test	High temperature and high humidity	IR-Reflow In-Board, 2 Times Ta= 85±5℃,				







焊接指导（2）

Guideline for Soldering (2)

清洗

山

Ń

Ń

山

山

山

Ń

Ń

使用注意事項 (1)

13. 00101111

W

P D M L O u L V X V @ K

VAR D

