

技术数据表

1816 红翠绿+红外 贴片式二极管

特点 (C



* L/W/H :1.85*1.65*0.6mm

Outline Dimensions(L / w / h): 1.85*1.65*0.6mm

* ROHS

Environmental protection products meet ROHS requirements

* MSL :3

Moisture sensitivity level MSL : 3 levels

* EIA

EIA standard packaging

* SMT

Suitable for SMT automatic production

*

Suitable for reflow soldering process



应用领域 () :

*

Blood oxygen detection

*

Heart rate monitoring

*

Pulse detection

*


electronic watch

*

Pulse oximeter

*

Electronics widely used in various health monitoring applications














包装 (2)

Packaging (2)

◇ 防潮防静电包装 Moisture Proof and Antti-Electrostatic Foil Bag

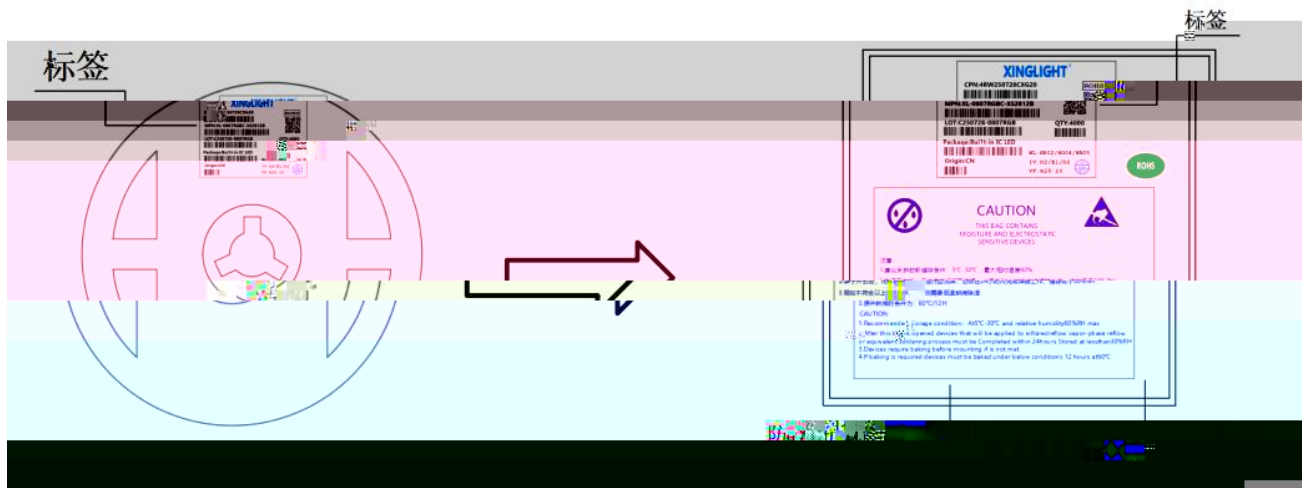

◇ 标签说明 Label Explanation







使用注意事项（3）

Precautions (3)

其他事项

=

elsár