



目录
Catalogue

Electrical Characteristics.....3

Typical Characteristic Curves.....5

Reliability tria.....6

Outline Dimensions.....7

Packaging..... 8

Precautions.....9

电性参数

Electrical Characteristics

Absolute Maximum Ratings Ta=25

Initial Electrical Optical Characteristics




Ta=25



Parameter	Symbol	Min.	Typ.	Max.	Unit.	Test Conditions
-----------	--------	------	------	------	-------	-----------------

典型特性曲线


Typical Characteristics Curves

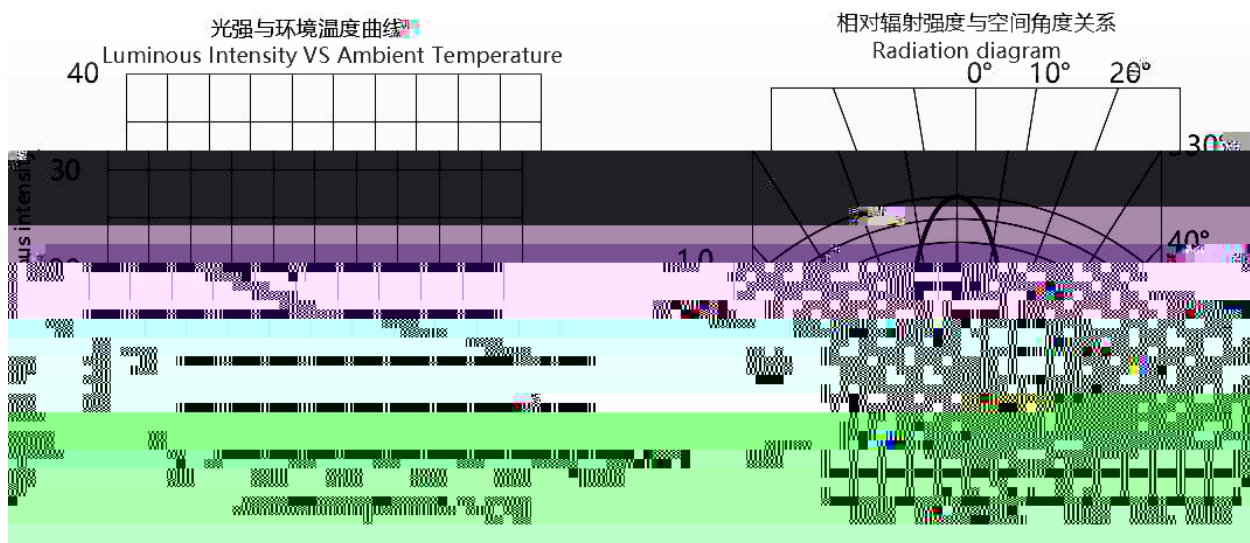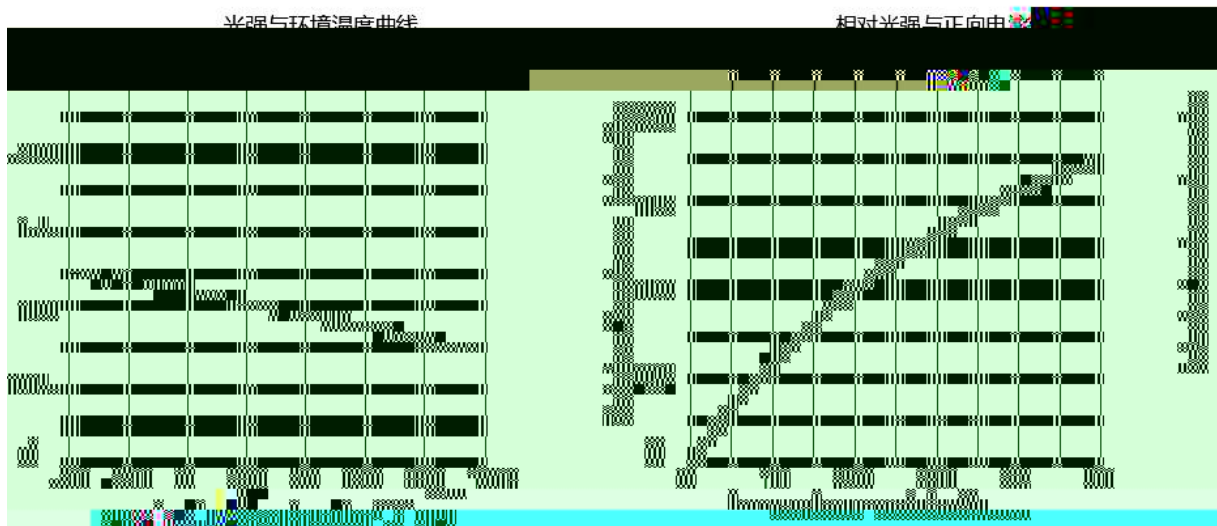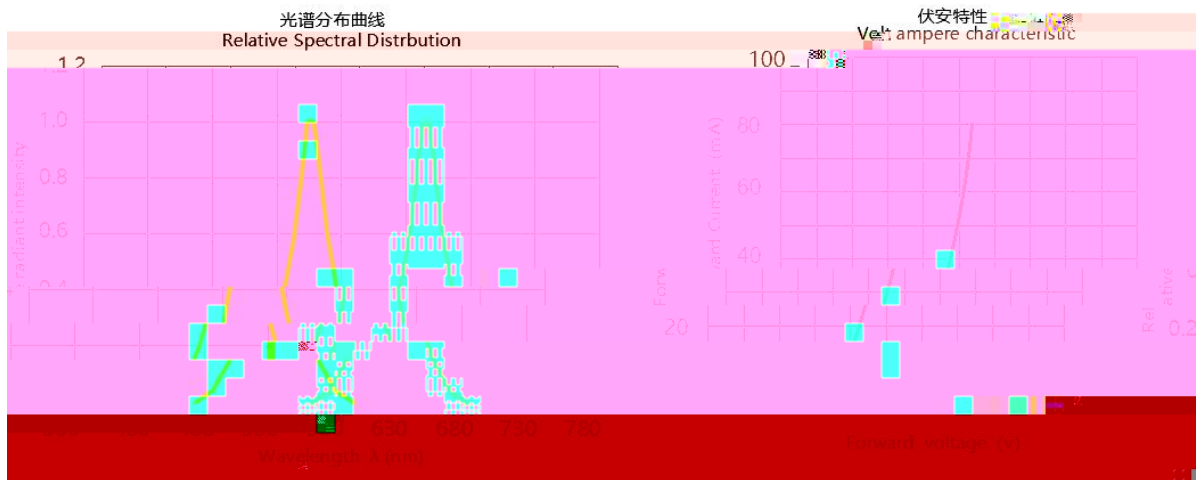

可靠性试验

Reliability Test Items And Conditions

--	--

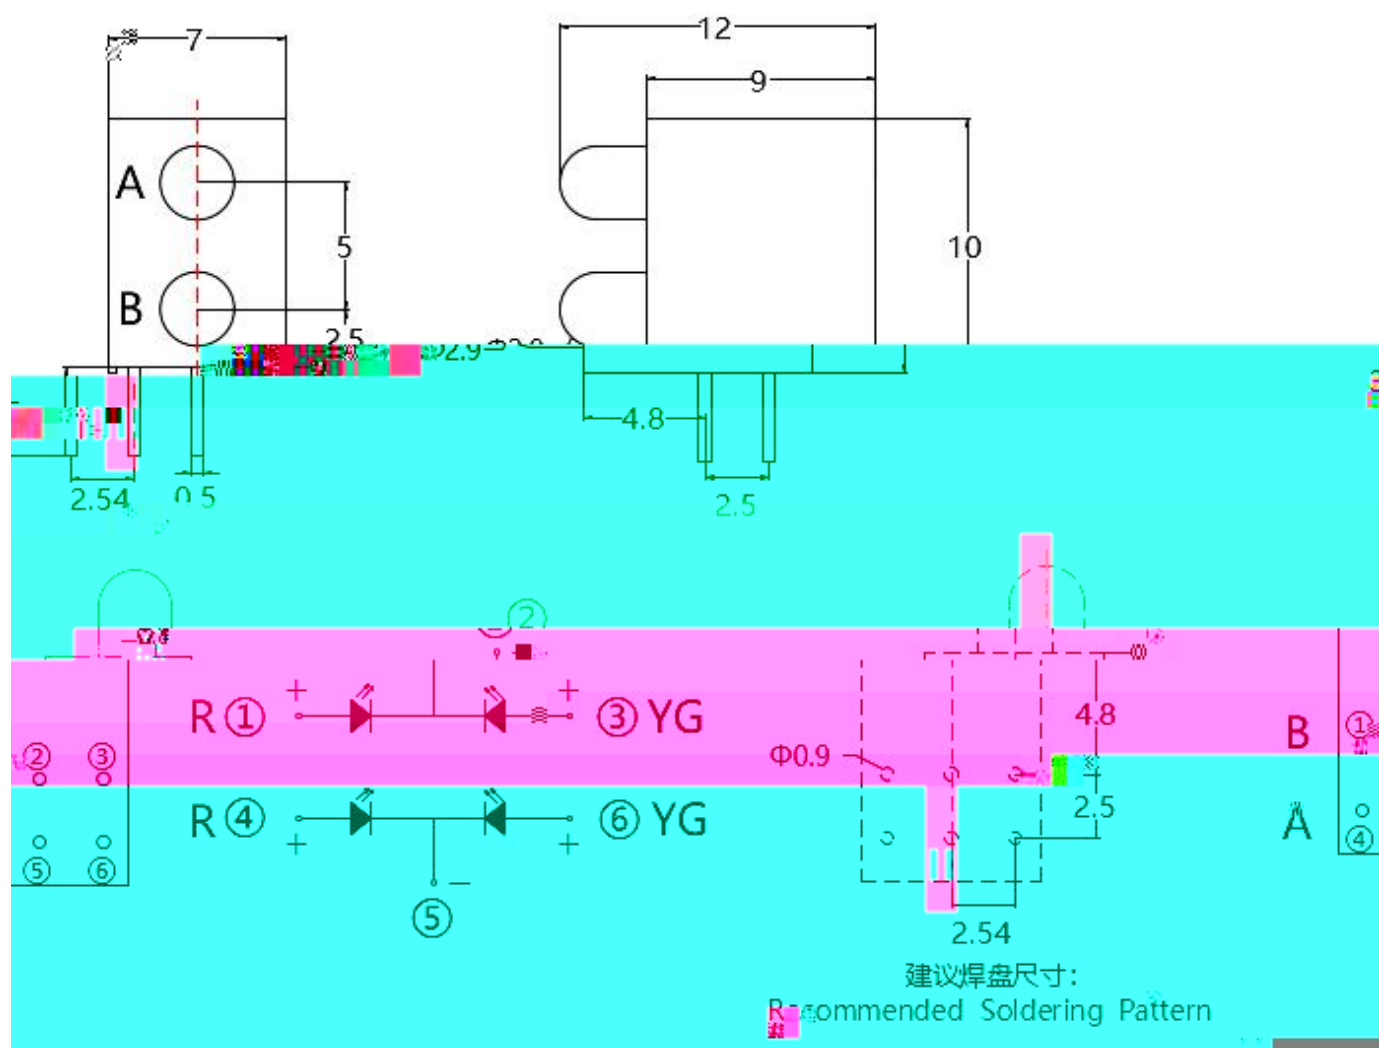

(Note)

Dimensions are in millimeters.

包装


Packaging

*

In Bags

*

Moisture Proof and Anti-Electrostatic Foil Bag

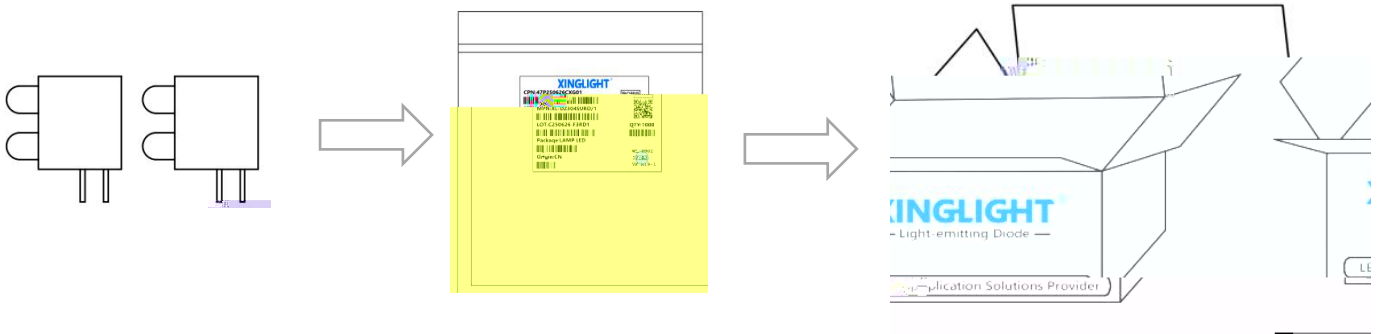

◇ 标签说明 Label Expansion

CPN: 批号/序列号 LOT: 日期/封装颜色

MPN: 型号 VF: 电压代码

WL: 波长代码 IV: 亮度代码

ORIGIN: 产地 QTY: 数量

PACKAGE: 封装



使用注意事項 1)

Precautions (1)

1、贮存:

Storage

2)

Precautions (2)

使用注意事項 (3) Precautions (3)

 其他事项:

Others

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

5、眼睛保护忠告:

Safety Advice For Human Eyes

Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.

If there are any modifications to the specification sheet, no further notice will be given.