


- ;43 p Z WF @ 58±F
Rswlfd0 rxwsxw sr zhu +frqwlqxr xv zdyh,- ;43 p Z +WF @ 58±F,
- 853qp
W|slfd0 hplwlrq zdyh0hqjwk= 853qp
- H flhqw udgldwlrq vr xufh iru fz dqg sxovhg rshudwlrq
- Vlqj0h p rgh vhlfrqgxfwr uodvhu
- Kljk prgx0dwlrq edqgzlgwk
- WR89
WR89 sdfndjh zlwkrwr glrgh
- PV0 =5
Prlvxuh vhlvlylw| 0hyh0 PV0 = 50hyhov
- URKV
Hqylurq phqwd0 surwhfwlrq surgxfw phhw URKV uhtxluphqwv



- OIGDU2Wri
Olqdu +OIGDU2Wri, dqg Udqjh Phdvxuh phqw
- Lqgxvuld0 Ghwhfwlrq dqg Vdihw| Vhqvlqj
- Phglfd0 dqg Elrskrwrqlfv
- Plolwdu| dqg Qdwlrqdo Ghihqvh
- Uvhdufk dqg Txdqwxp Whfkqr0rj|
- Frqvxphu Hohfwurqlfv dqg Vhfxulw| V|vhwpv




目录










OPTIMU

Absolute Maximum Ratings Ta=25


parameter	Symbol	unit
-----------	--------	------




曲开型主灯性能

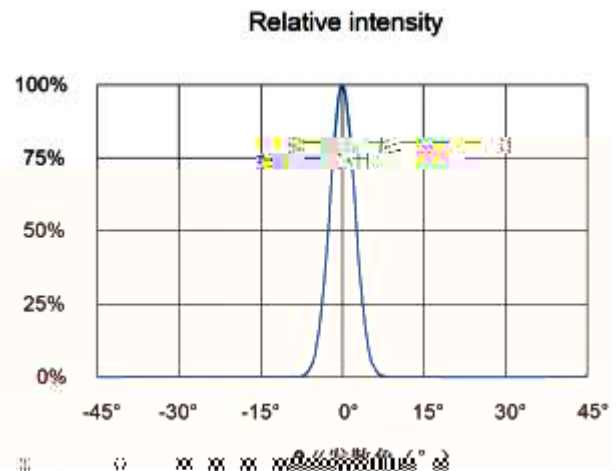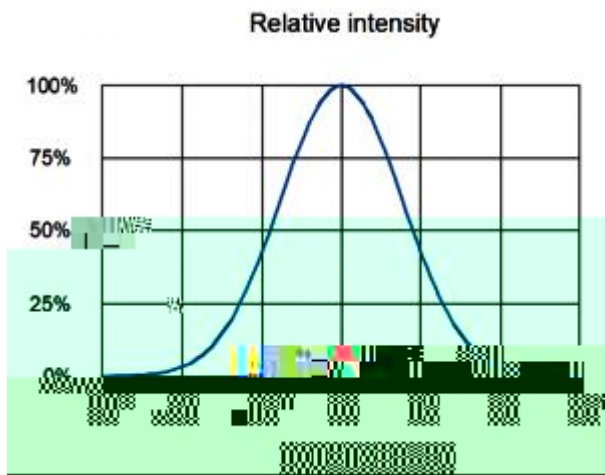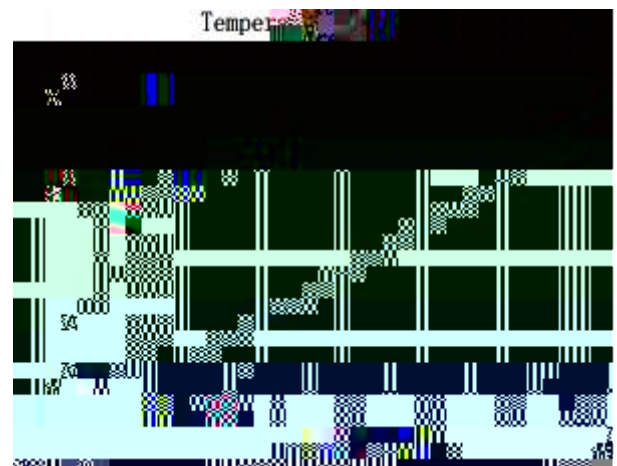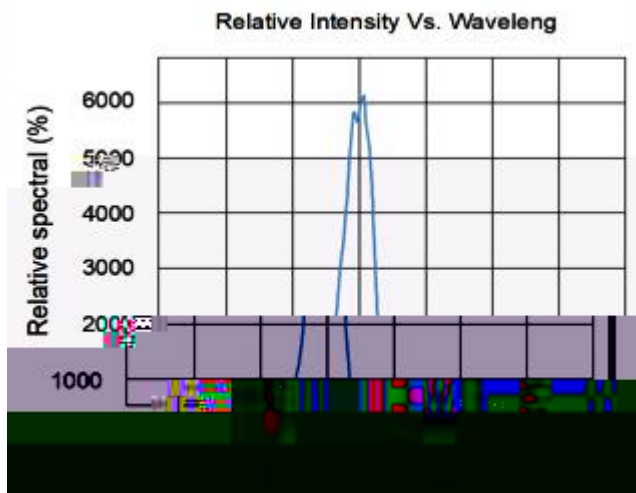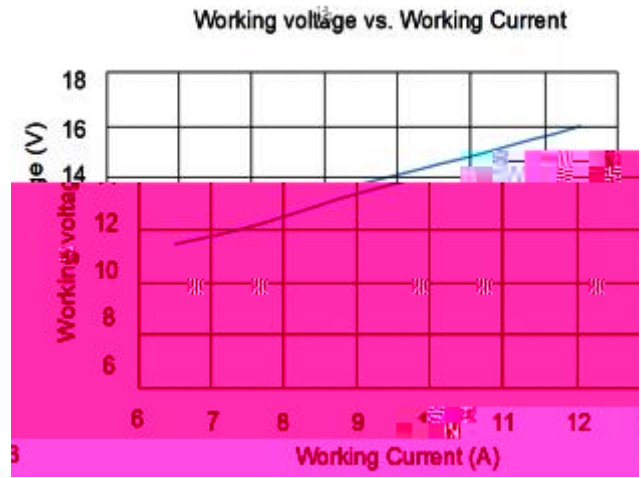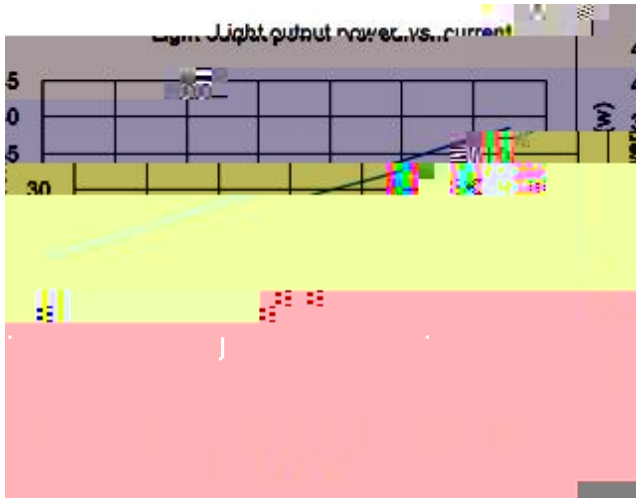

外形尺寸

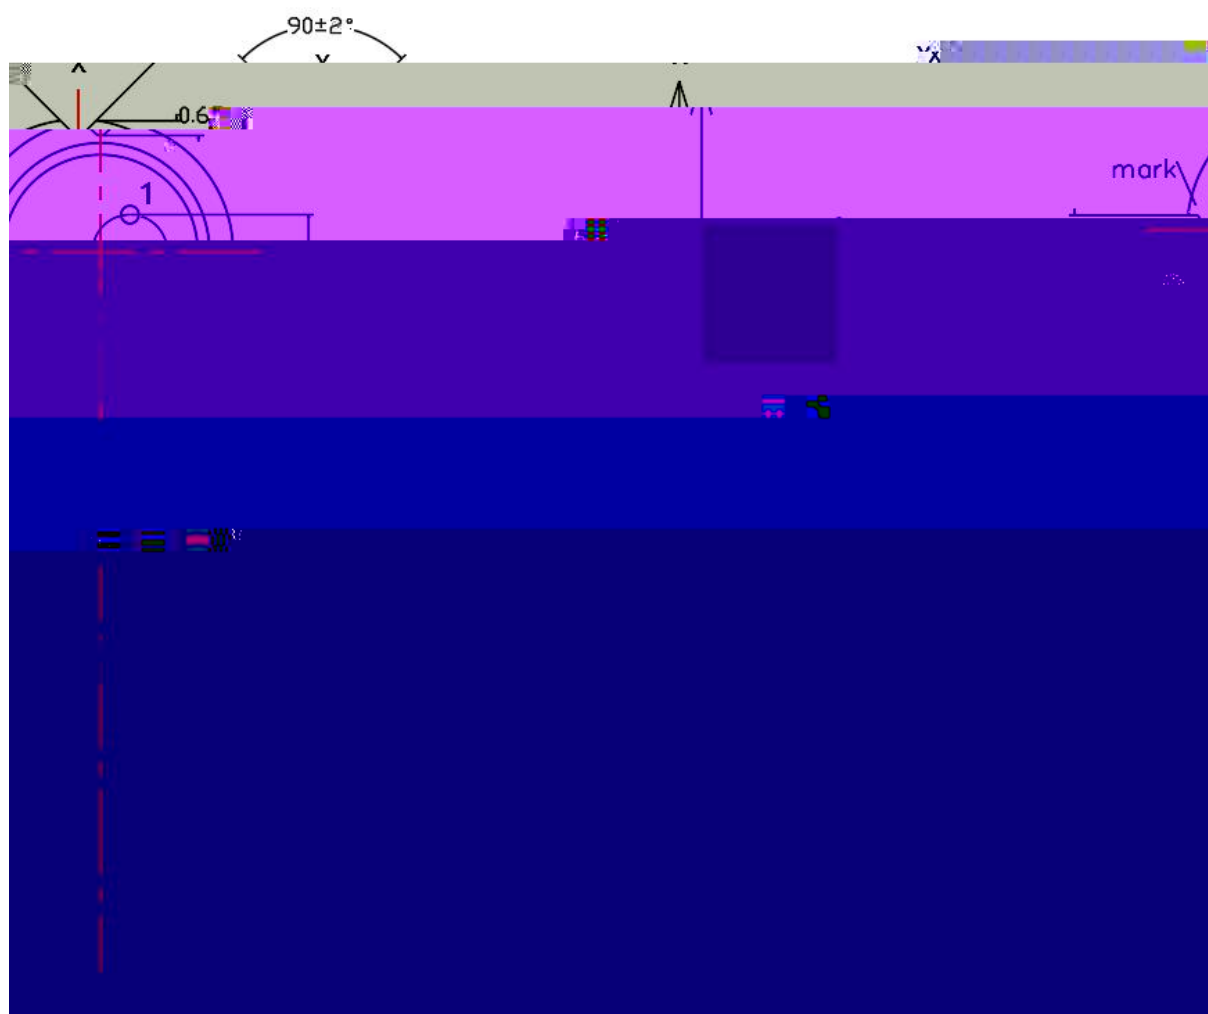





4 5

Lw p xvw eh 5 p p iur p wkh froorlg wr ehqg wkh eud;

