








- 416 Z WF @ 58±F
Rswlfd0 rxwsxw sr zhu +frqwlqxr xv zdyh,- 416 Z +WF @ 58±F,
- 858qp
W|slfd0 hplvlrq zdyh0hqj wk- 858qp
- H flhqw udgldwlrq vrxufh iru fz dqg sxovhg rshudwlrq
- Vlqj0h p rgh vhp lfrqgxfr uodvhu
- Klj k prgx0dwlrq edqgzlgwk
-

目录

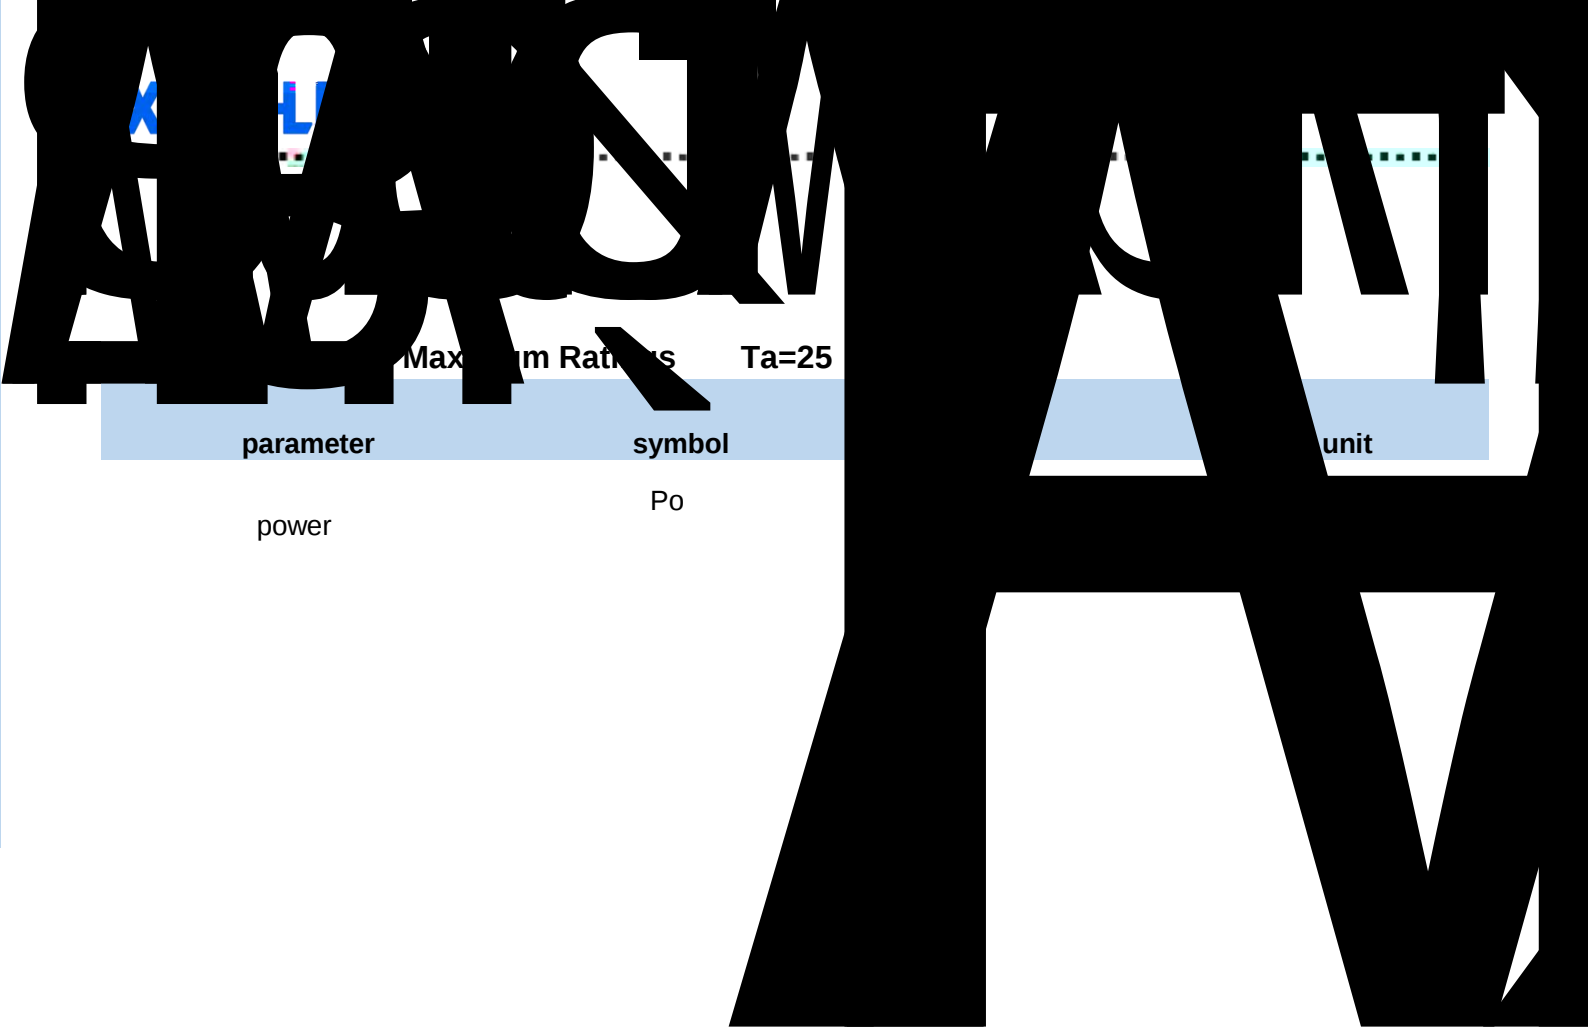


Maximum Ratings		Ta=25
parameter	symbol	unit
power	Po	

电性能特性曲线

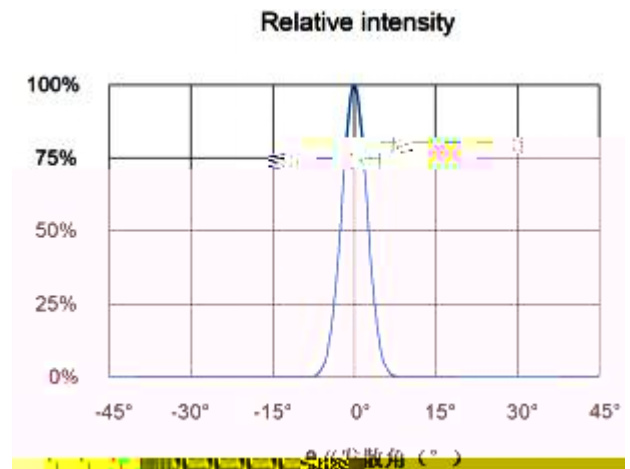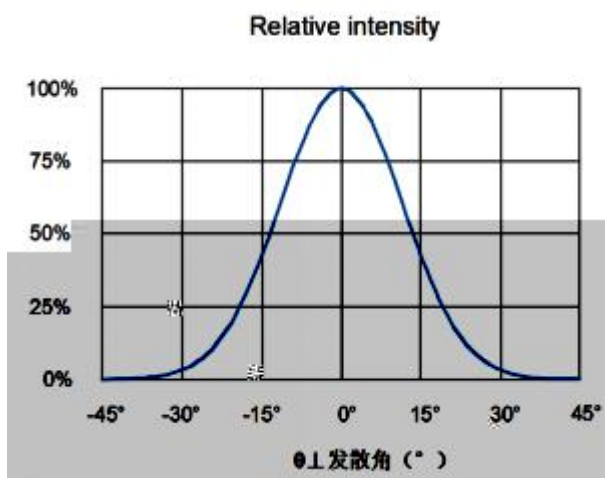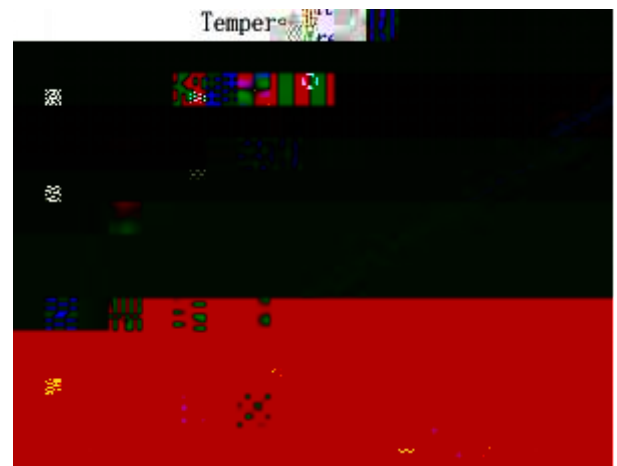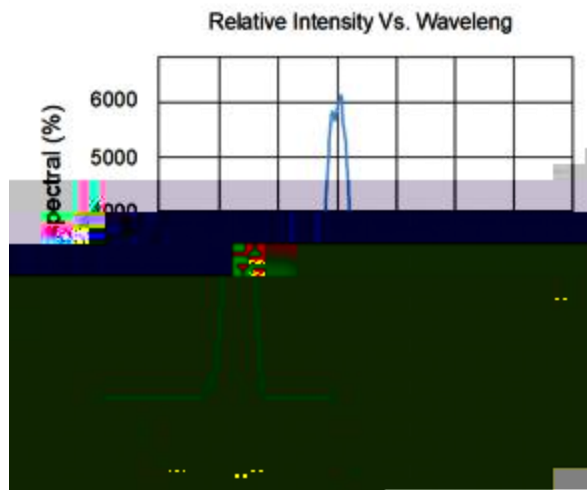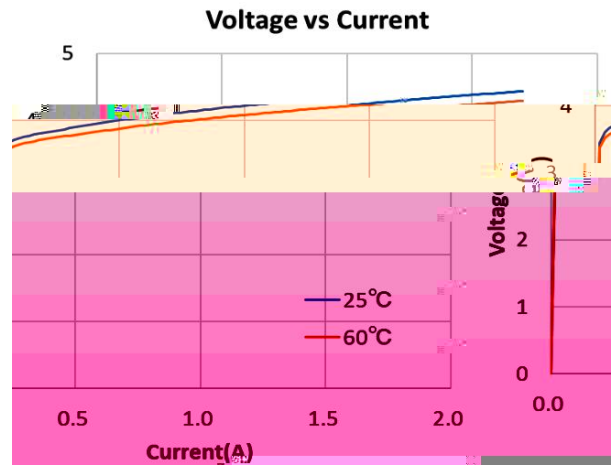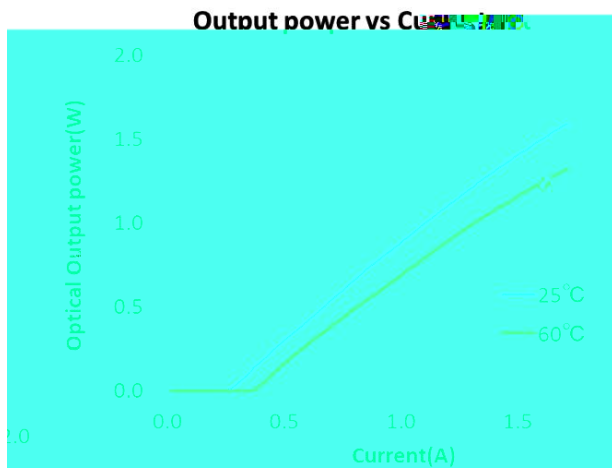

包装

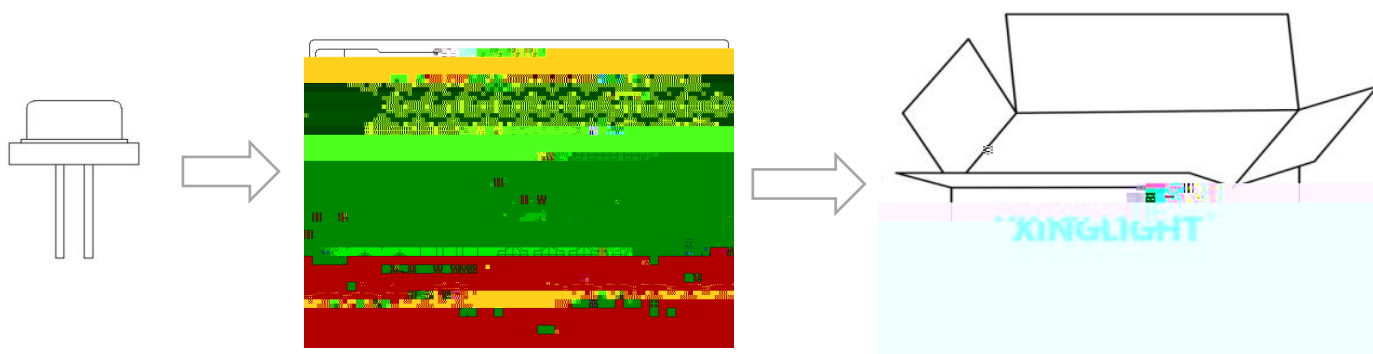

4

5