

Product features

目录

Catalogue

natural parameter3

Typical Characteristic Curves5

Outline Dimensions6

Packaging.....7

Precautions.....8

特性参数

natural parameter

Absolute Maximum Ratings Ta=25

parameter	symbol		unit
power	Po	30	mW
backward voltage	VR	2	V
working temperature	TOP	-20 60	
Storage Temperature	Tstg	-40 85	
Welding conditions	Tsol	reflow soldering	240°C 6s
		manual welding	300°C 3s

Recommended Operating Conditions

parameter	symbol		unit
Threshold Current	Ith	23	
Working Current	Iop	90	
working voltage	Vop	6.0	





Optoelectronic Parameters **Ta=25**

parameter	symbol	Test conditions	min	typ	max	unit
-----------	--------	-----------------	-----	-----	-----	------

Thr °


典型特性曲线

Typical Characteristics Curves

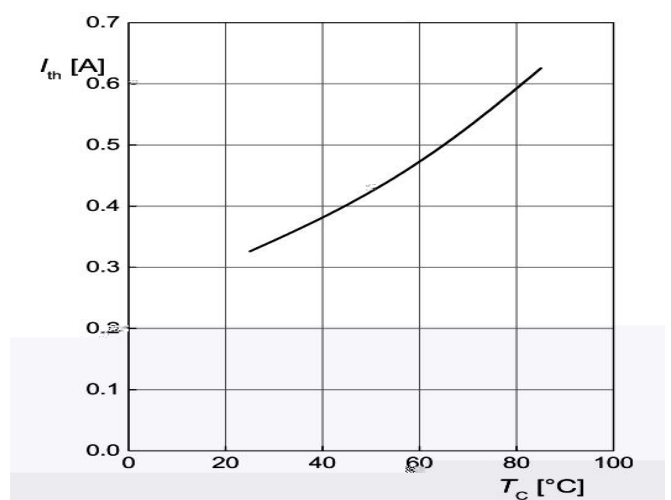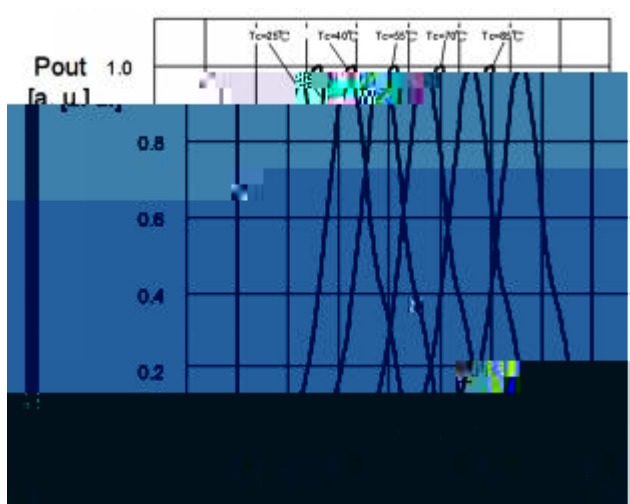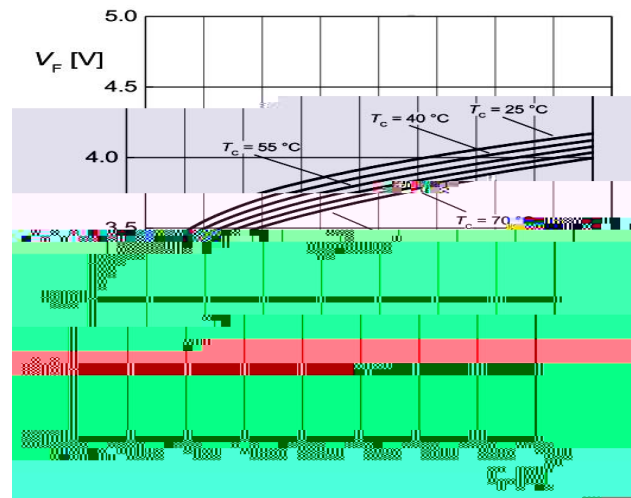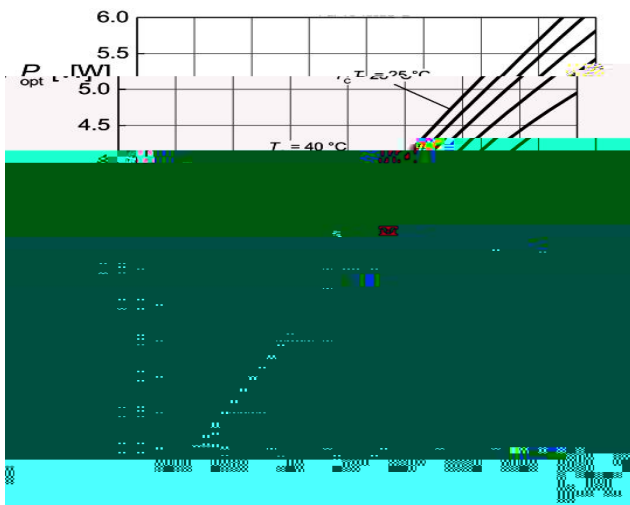

外形尺寸

Outline Dimension

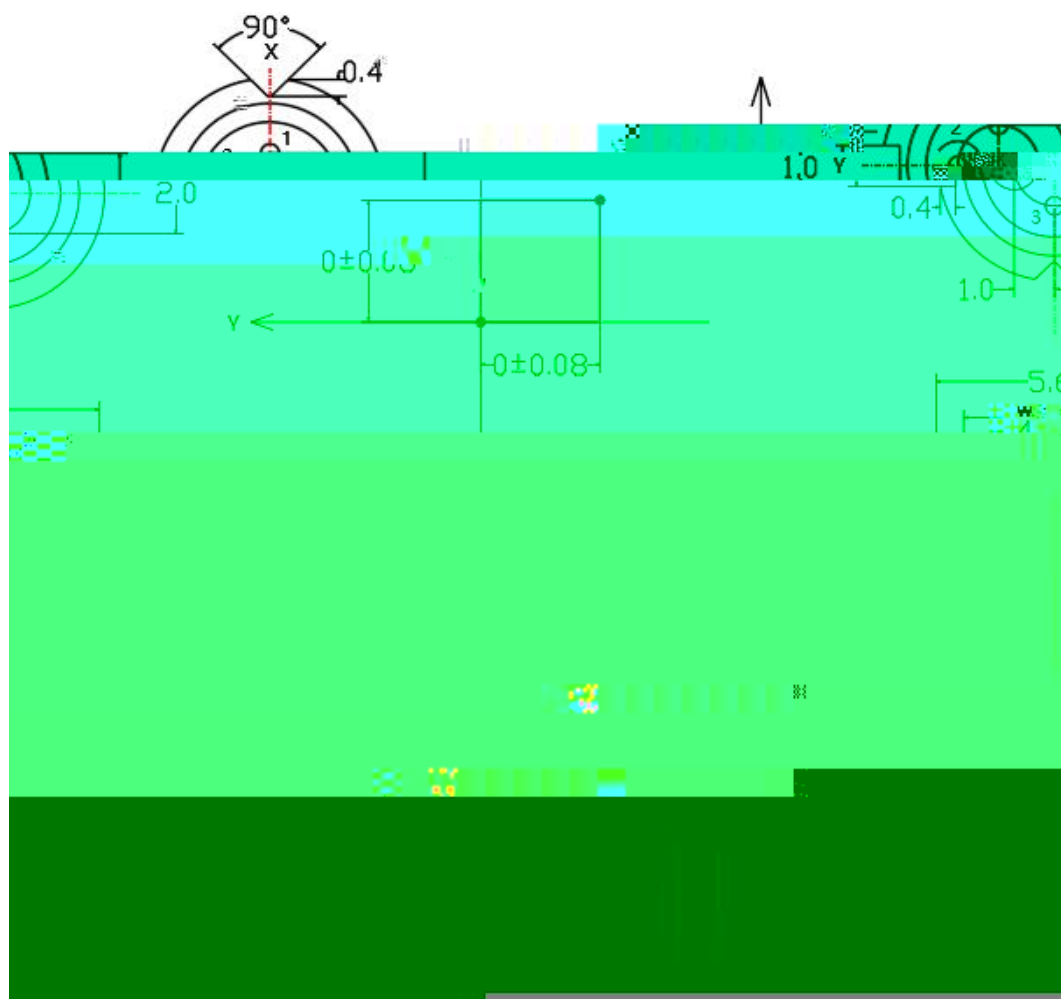




使用注意事项

Precautions

1. Feet assembly

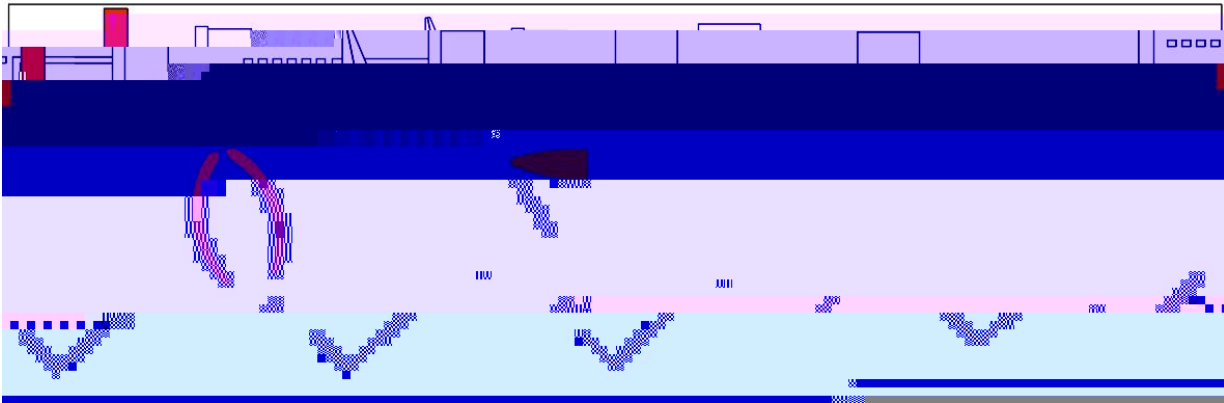

- ## 2. Electrostatic protection

- 3.