典型特性曲线

Typical Characteristics Curves

光谱分布曲线
Relative Spectral Distrbution

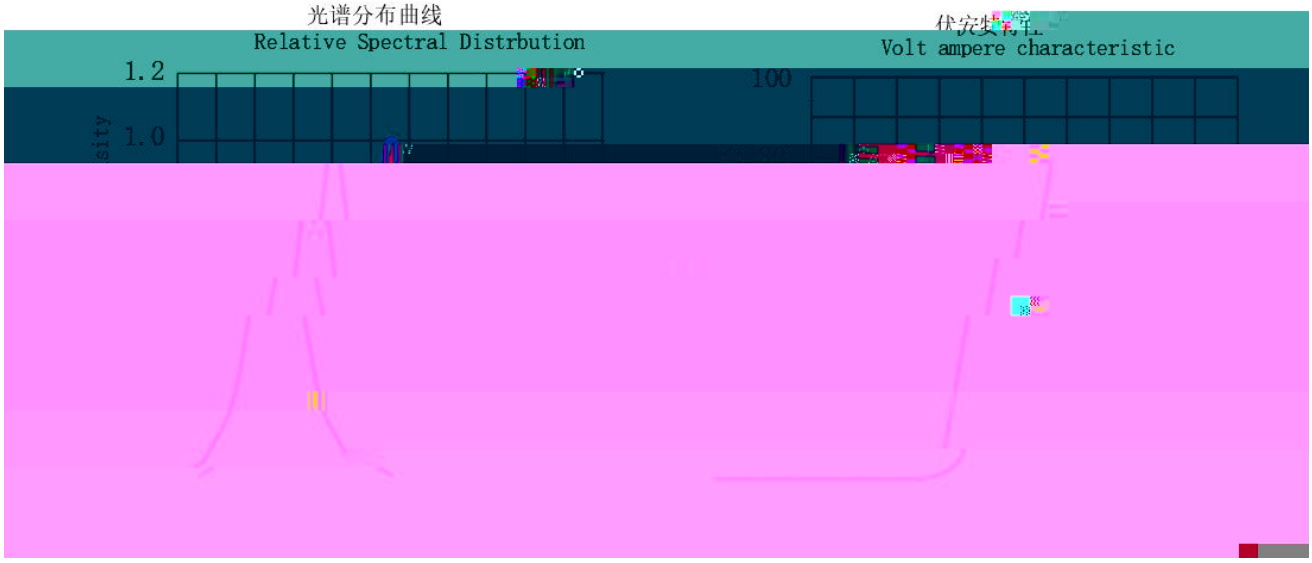

伏安特性
Volt ampere characteristic

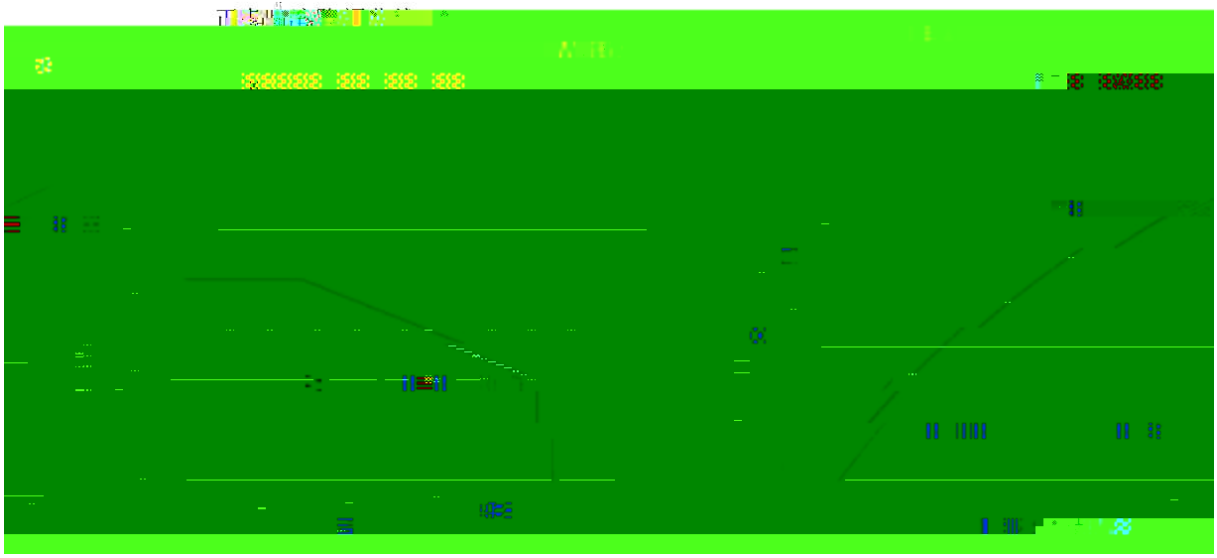

相对辐射强度与空间

25 ± 5 /Note If not otherwise indicated the test environment temp erature is 25 ± 5

Part No.:XL-2214UGC

焊接指导（1）

Guideline for Solder

1、使用烙铁人手焊接

Hand soldering

300 3

30W

Manual welding is recommended only for repair and heavy industry [illegible] soldering iron of less than 30W is recommended to be used ito